



DONGYA ELECTRONIC



BZJ-200A

Series N.C. Contactors
系列常闭接触器


1. 产品型号含义 Nomination(nomogram)




2. 使用条件 Use conditions required

环境温度 Ambient temperature: -25~+40℃
相对湿度 Relative humidity: +20℃达98%(upto 98% at +20℃)
固定处的振动频率 Vibration freq. at the fixed position:
3g, 1~50Hz 振幅 0.5mm
3g, 1~50Hz ampli 0.5mm
安装方向 Mounting directions: 任意 Optional

14. 外形安装图 Configurational mounting diagram

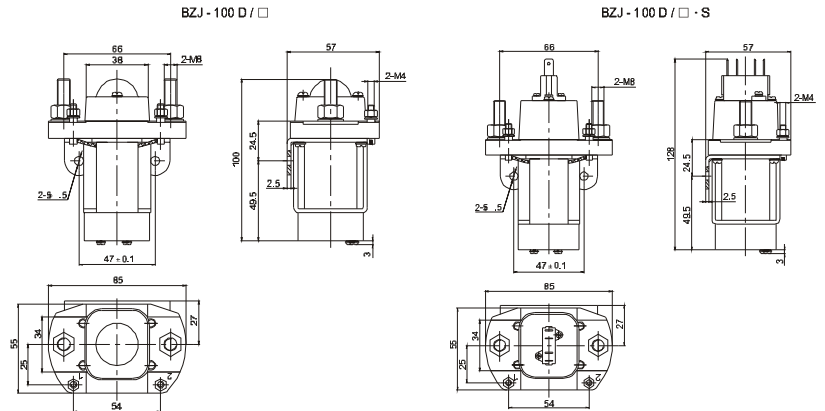

15. 线路原理图 Circuit diagram

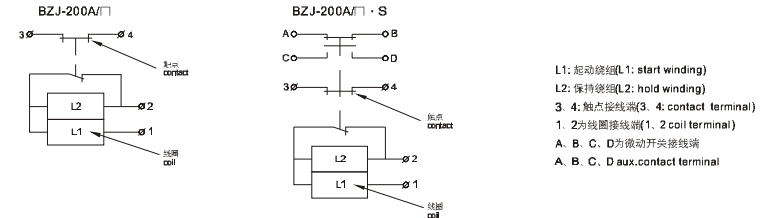

16. 简要技术数据 Basic technical data

编号 NO.	参数名称 Parameters	产品代号 Product code	
		BZJ-200A系列 series	
1	线圈额定电压 Rated coil volt(VDC)	12, 24, 30, 48, 60, 72, 120等(etc)	
2	线圈功耗 Coil Power dissipation(W)	6-8	
3	(20±5)℃下冷态起动线圈最大电流(A) Max. coil start current in cold state at (20±5)℃(A)	5	
4	触点电路额定电压 Rated volt of contact circuit(V DC)	48	
5	触点电路额定负载电流 Rated load current of contact circuit(A)	200A	
6	(20±5)℃下, 冷态动作电压(V) Operating volt in cold state at (20±5)℃	吸合 Pick-up	不大于线圈额定电压的70% Not above 70% of rated coil volt
		释放 Release	线圈额定电压的(5~30)% (5~30)% of rated coil volt
7	100A负载下主触点接触电压降 Contact volt drop of main contact at 100A	不大于80mV not above 80mV	
8	额定电压下最大动作时间(ms)(线圈不带抑制电阻) Max. operating time at rated volt(ms) (Coil with no suppression circuit)	40	
9	机电强度 Puncture(volt) strength	50Hz 1000V AC 1min	
10	电寿命(τ=0.001s)(次) Electric life(τ=0.001s)(cycles)	20,000 Ops.	
11	机械寿命 Mechanical life	10万次 100,000 Ops.	
12	工作规范 Working duty	连续 Continuous	