
THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 1997
© COPYRIGHT 1997 BY - ALL RIGHTS RESERVED.


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	B12	ECR-15-012961	09SEP2015	GCM	MKO
	C	ECR-15-015721	18FEB2016	GCM	JB

NOTES
1 Material : Housing : aluminium die casting alloy
Seals : Neoprene : Viton
2 Surface : Varnish - Grey
- Aluminium oxide
- Varnish black
3 Varnish on the inside is not necessary
4 Packaging
Quantity 5 pieces in a box


PN 1-1.2-1.6-6.0-5.0-8 & 1-0

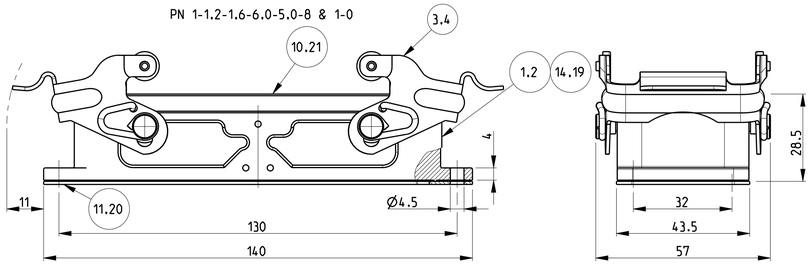

PN 0-2

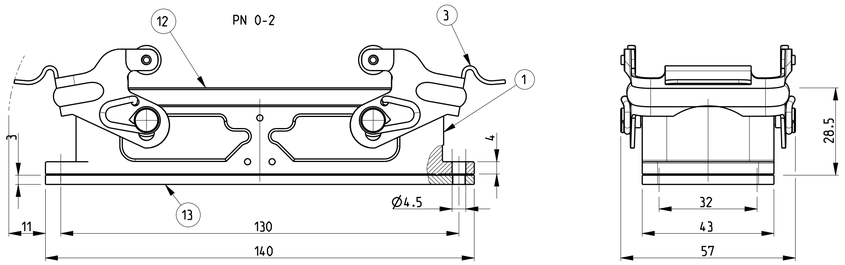


PN 1-3




SCALE 1:2

PN 1-2.2-2.0-3.0-6 & 0-7




SCALE 1:2


PN 1-2.2-2.0-3.0-6 & 0-7

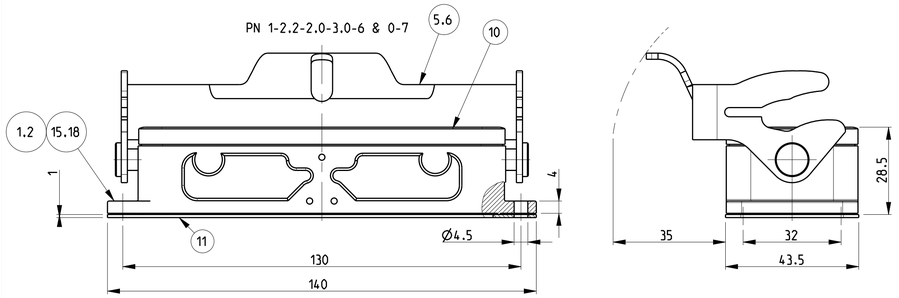

PN 1-9

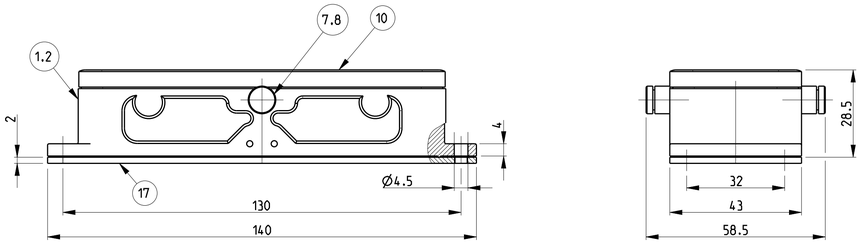


PN 0-9 & 1-4




SCALE 1:2

PN 1-1.2-1.6-6.0-5.0-8 & 1-0



SCALE 1:2

PN 1-8.2-8 & 0-1

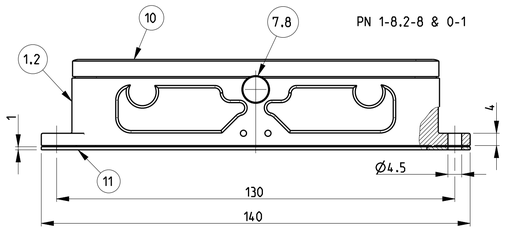

PN 1-3
With diecast bolt

PN 1-8.2-8 & 0-1

SCALE 1:2

PN 0-2

SCALE 1:2


PN 0-4

SCALE 1:2


PN 1-9

SCALE 1:2


4 Noses milled off

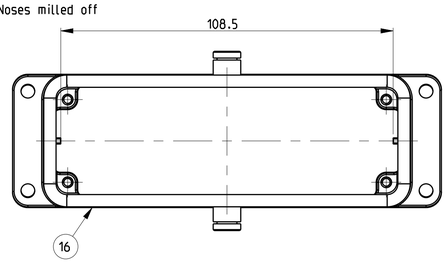

PN 0-4

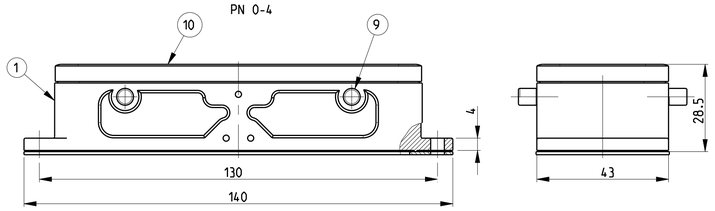


Panel cut out

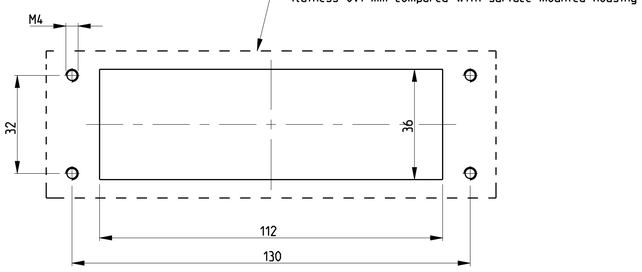

Landing milled off

PN 0-9 & 1-4

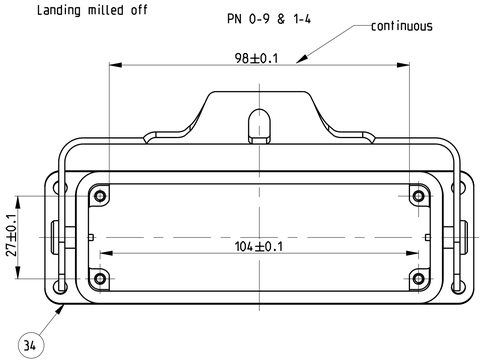

1-41-31-06-60-91-90-70-60-50-40-30-20-12-81-82-21-22-11-1	DESCRIPTION	MATERIAL	SURFACE	COLOR	ITEM NO	NOTES
HB.24.AG-LB	Surface mounted housing side entry HB	Aluminium			23	With diecast bolt
HB.24.AG-F	Profile seal	Neoprene		Black	22	Conductive
HB-EMV 24.AG-VS	Flange seal	Neoprene		Black	21	Conductive
HB.24.AG-VS	Surface mounted housing side entry HB	Aluminium	Chromit AL TCP passivation	Black RAL9005	20	
HB.24.AG-LB	Surface mounted housing side entry HB	Aluminium		Grey RAL7001	19	Neutral
HB-Z.24.AG-ZVGR	Flange seal	Neoprene		Black	18	2 mm thick
HB.24.AG-LB	Surface mounted housing side entry HB	Aluminium		Grey RAL7001	17	Noses milled off
HB-K.24.AG-LB	Surface mounted housing side entry HB	Aluminium		Grey	16	Without TE indication
HB.24.AG-VS ELECON	Surface mounted housing side entry HB-K	Aluminium	Aluminium oxide	Blank	15	⚠4
HB.24.AG	Surface mounted housing side entry HB	Aluminium		Grey RAL7001	14	Elecon-logo
HB.24.AG-LB	Flanged seal	Viton		Black	13	
HB.24.AG-VS	Profile seal	Viton		Light grey	12	3 mm thick
HB-Z.24.AG-ZVRG	Flange seal	Neoprene		Black	11	1 mm thick
HB-K/Z.24.AG-ZVGR	Profile seal	Neoprene		Black	10	
HB-Z.24.AG-ZVGR	VS-Clip bolt	Steel	Zinc plated	Blue	9	
HB-K.24.AG-LB	ZB-Clip bolt	Stainless steel		Blank	8	
HB.24.AG-LB	ZB-Clip bolt	Steel	Zinc plated	Blue	7	
HB-K.24.AG-LB	LB-Side clip	Stainless steel		Blank	6	
HB.24.AG-VS	LB-Side clip	Steel	Zinc plated	Blue	5	
HB-K.24.AG-VS	VS-Locking clip	Stainless steel		Blank	4	
HB.24.AG-VS	VS-Locking clip	Steel	Zinc plated	Blue	3	
	Surface mounted housing side entry HB-K	Aluminium	Aluminium oxide	Black RAL9005	2	
	Surface mounted housing side entry HB	Aluminium		Grey RAL7001	1	

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±
1 PLC ±
2 PLC ±
3 PLC ±
4 PLC ±
ANGLES ±

MATERIAL

FINISH - -

DWN Schweiger 23.071997
CHK Kramer 26.06.1998
APVD -
PRODUCT SPEC 108-74001/74003
APPLICATION SPEC 114-74001/74004/74005
WEIGHT -

TE Connectivity

NAME Surface mounted housing bottom entry assy HB.24

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A1	00779	C-1102291	-

CUSTOMER DRAWING | SCALE 5:1 | SHEET 1 OF 1 | REV C

4805 (3/13)