
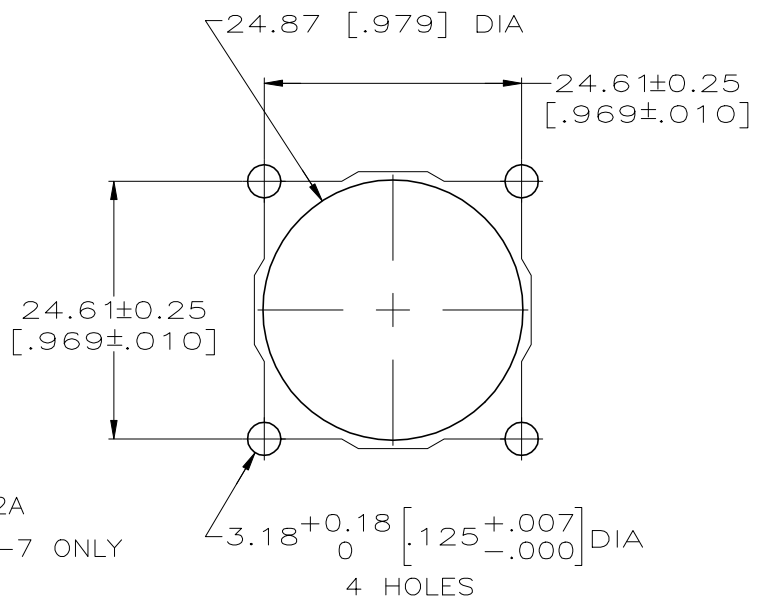
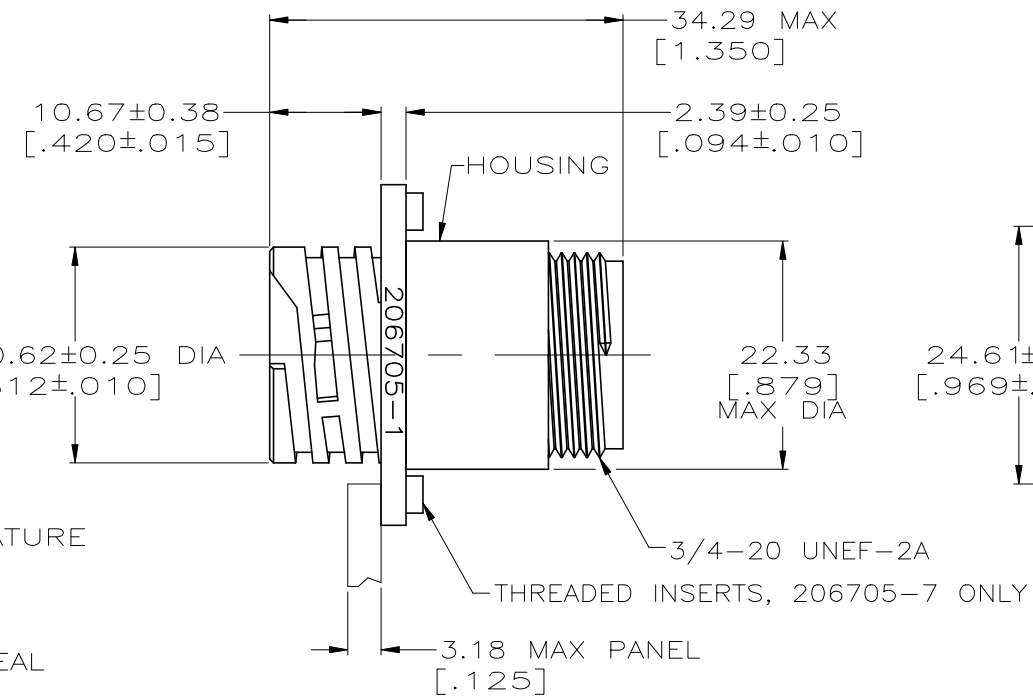


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	M	REVISED PER ECO-12-015521	28SEP12	KH	MZ
	N	REVISED PER ECO-17-000037	10MAR2017	RS	MZ
	P	REVISED PER ECO-19-014836	21OCT2019	RS	MZ

D



C

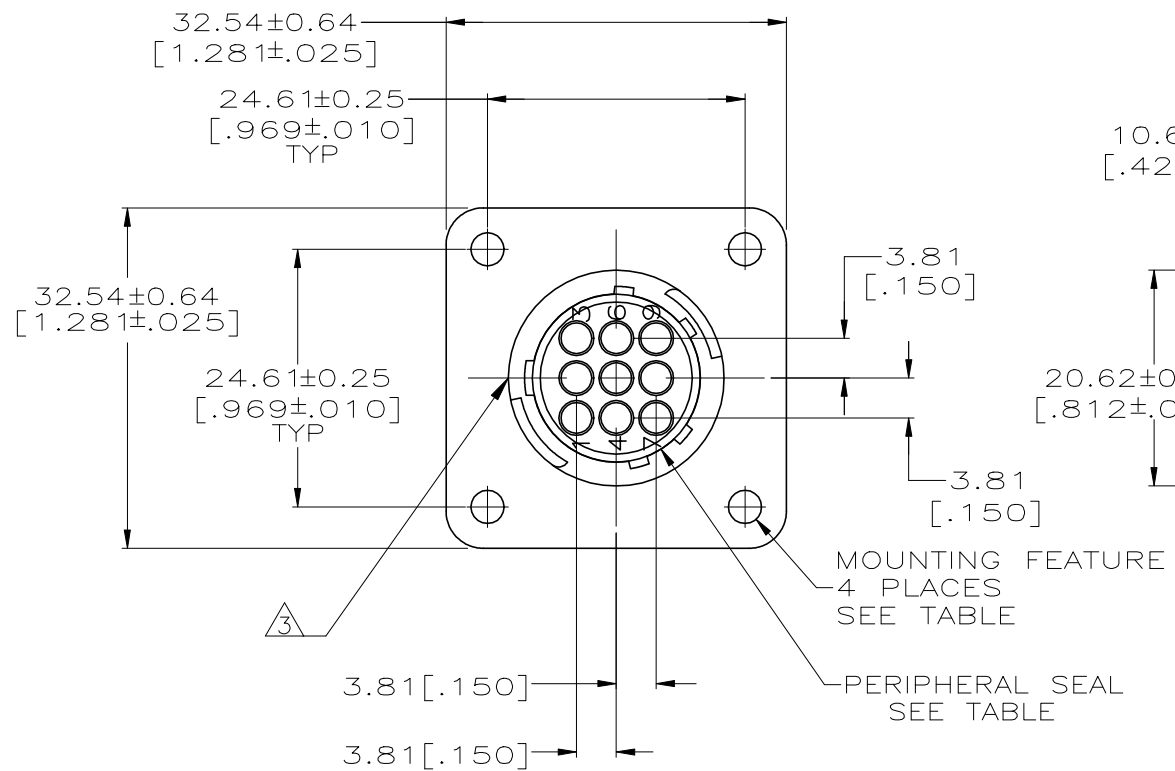

RECOMMENDED PANEL CUTOUT

DETAIL A

B

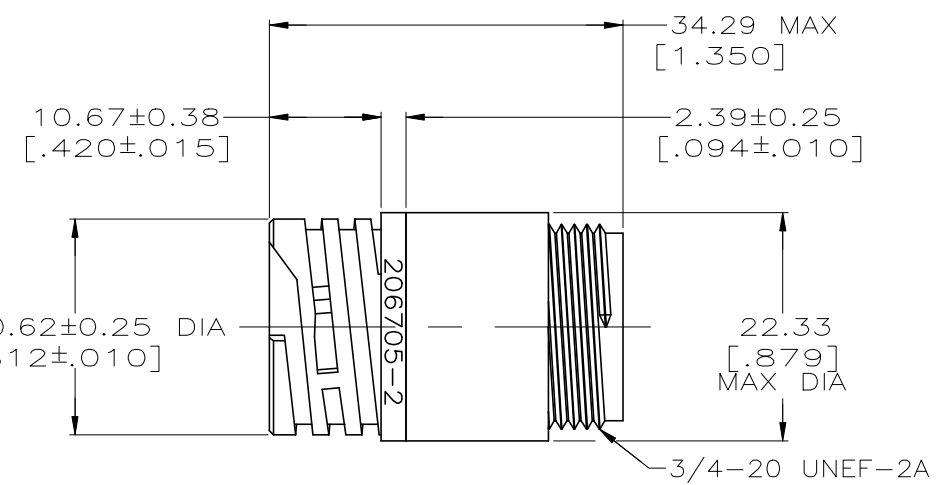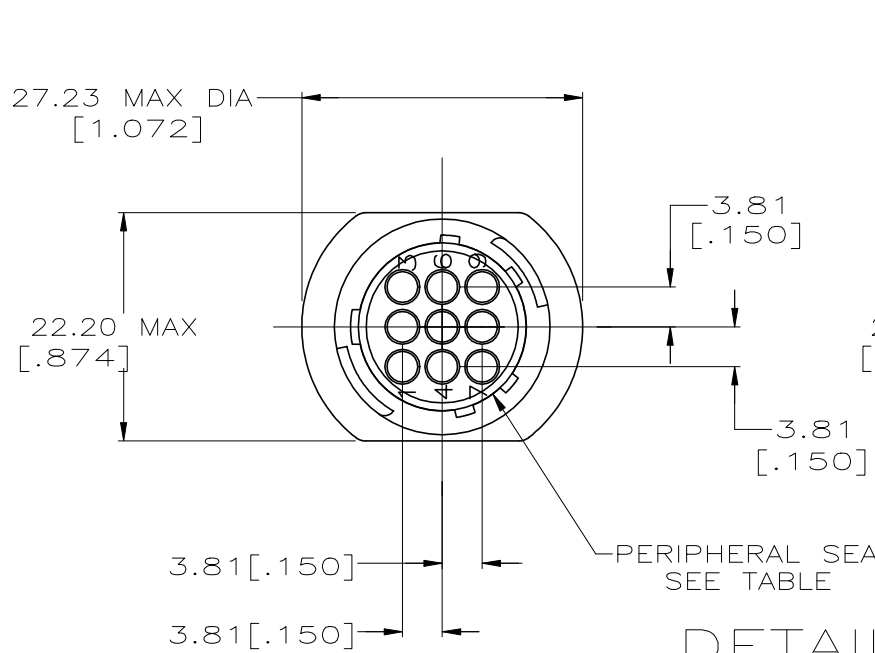

DETAIL B

#4-40 THREADED INSERTS		NO	A	206705-7
Ø3.18 (.125) HOLES	3	NO	A	206705-5
Ø3.18 (.125) HOLES	-	YES	B	206705-4
	-	YES	A	206705-3
	-	NO	B	206705-2
	-	NO	A	206705-1
MOUNTING FEATURE	NOTES	PERIPHERAL SEAL	SEE DETAIL	PART NUMBER

- 1 CAVITY IDENTIFICATION ON FRONT AND REAR FACE.
- 2 RECEPTACLE WILL ACCEPT NINE (9) MULTIMATE PIN CONTACTS.
- 3 WHITE DOT OVER MAJOR KEY, APPROX WHERE SHOWN.
- 4 OBSOLETE PART NUMBER.
- 5 MATERIALS
HOUSING: PA66, BLACK
PERIPHERAL SEAL: NITRILE BUTADIENE RUBBER, BLACK
THREADED INSERTS: BRASS

THIS DRAWING IS A CONTROLLED DOCUMENT.
DWN D.HARDY 05/19/94
CHK R.STONE 05/20/94

DIMENSIONS: MM [INCHES]
TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± -
1 PLC ± -
2 PLC ± 0.13 [.005]
3 PLC ± -
4 PLC ± -
ANGLES ± -
FINISH -

APVD -
PRODUCT SPEC 108-10024
APPLICATION SPEC -
WEIGHT -

TE Connectivity
RECEPTACLE HOUSING, STANDARD
SEX, SHELL SIZE 13, CPC

SIZE A2 CAGE CODE 00779 DRAWING NO C=206705 RESTRICTED TO -

CUSTOMER DRAWING SCALE 2:1 SHEET 1 of 1 REV P