
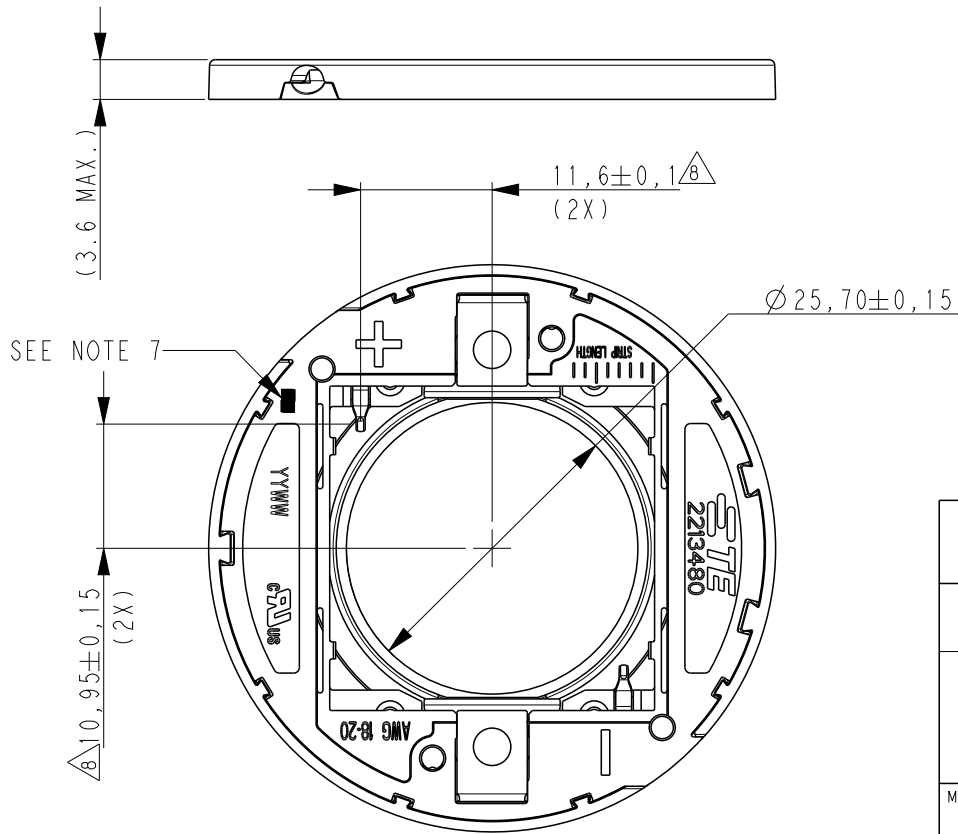
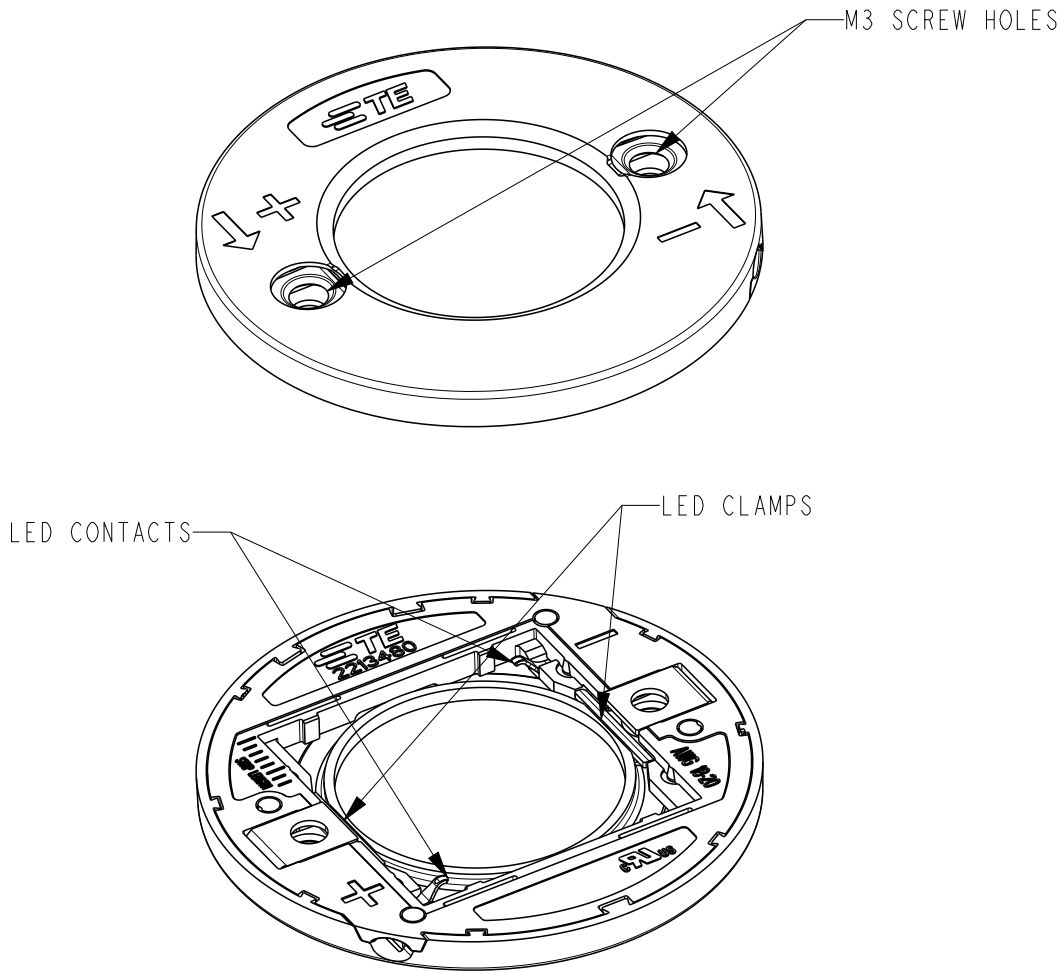
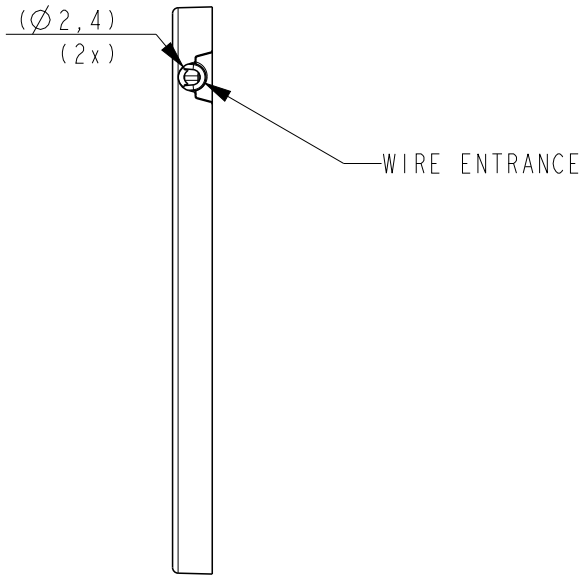
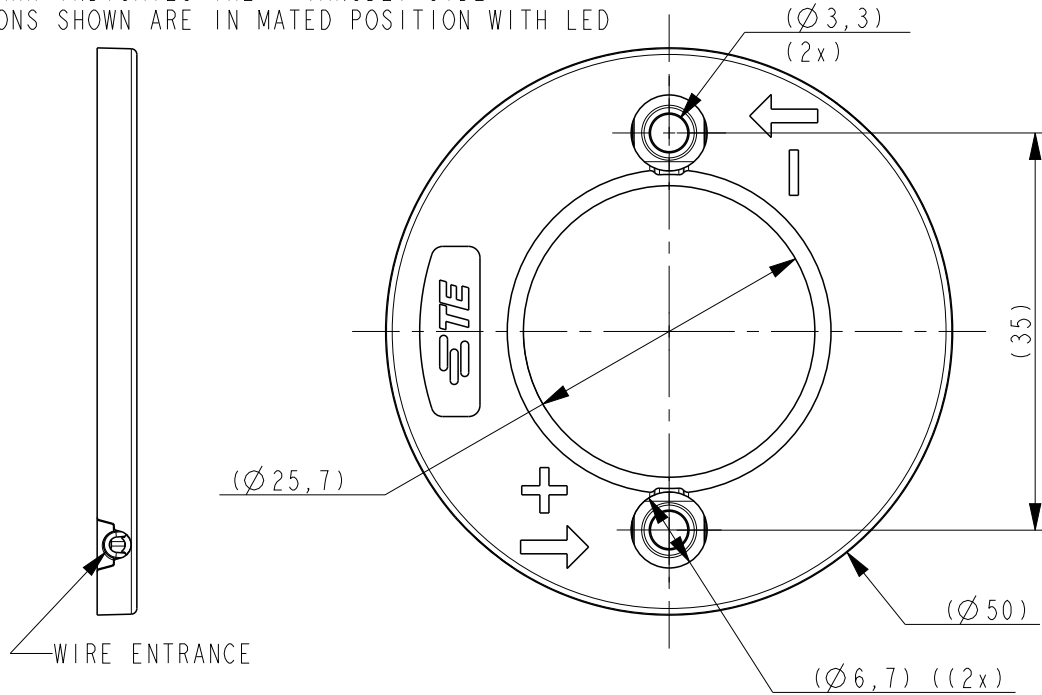


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
H	-		A	ECR-15-001589	03FEB2015	KR	OL
			B	ECR-15-006869	02MAY2015	KR	OL
			C	ECR-16-008263	09JUN2016	KR	MvE

- NOTES:
1. MATERIALS:
HOUSING: GLASS FILLED PBT, HALOGEN FREE FLAME RETARDANT
COLOR : WHITE
CONTACTS: GOLD PLATED COPPER ALLOY
 2. FOR WIRE TYPES AWG 18 AND 20 AWG.
 3. COMPLIES WITH DIRECTIVE 2002/95/EC (ROHS)
 4. WIRE STRIP LENGHT: 7-8 mm
 5. MAX. WIRE INSULATION OUTER DIAM.: $\varnothing 2.3\text{mm}$.
 5. RECOMMENDED SCREWTORQUE: 0.4 - 0.6 Nm.
 6. IN ORDER TO CREATE A FLAT OPTIC LANDINGZONE
ON HOLDER A COUNTERSUNK SCREW CAN BE USED,
I.E. SCREW-TYPE ISO 10642.
 7. BLACK MARK INDICATES THE + (ANODE) SIDE
 8. DIMENSIONS SHOWN ARE IN MATED POSITION WITH LED



2-2213480-1	Z50 LED HOLDER 2828	2x10 PIECES IN TRAY AND BOX 25 BOXES IN SHIPPING BOX
1-2213480-1	Z50 LED HOLDER 2828	2x10 PIECES IN TRAY AND BOX 25 BOXES IN SHIPPING BOX
2213480-2	LUMAWISE Z50 LED holder 2727 general	2x5 PIECES IN TRAY 56 TRAYS IN SHIPPING BOX
2213480-1	LUMAWISE Z50 LED holder 2828 general	2x5 PIECES IN TRAY 56 TRAYS IN SHIPPING BOX
PART NO	DESCRIPTION	PACKAGING

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 08APRIL2014 P. POORTER	 TE Connectivity		
		CHK 08APRIL2014 O. LEIJNSE			
DIMENSIONS: mm		APVD 08APRIL2014 O. LEIJNSE	NAME LUMAWISE Z50 high performance LED HOLDER		
		PRODUCT SPEC 108-133018			
		APPLICATION SPEC 114-133019	SIZE A3		
MATERIAL -		WEIGHT -			
		FINISH -	CAGE CODE 00779		
			DRAWING NO C-2213480		
			RESTRICTED TO -		
			SCALE 3:2		
			SHEET 1 OF 3		
			REV C		

THIS DRAWING IS UNPUBLISHED.





RELEASED FOR PUBLICATION

© COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	APVD
H	-		-	SEE SHEET 1	-	-

2213480-1 AS SHOWN



2213480-2 AS SHOWN

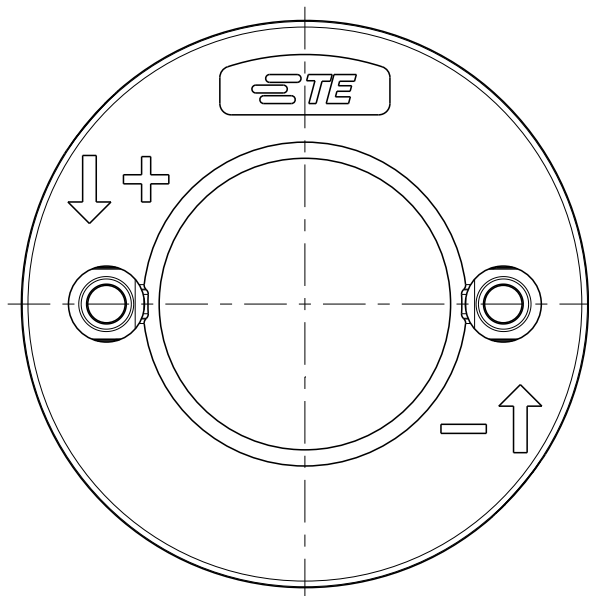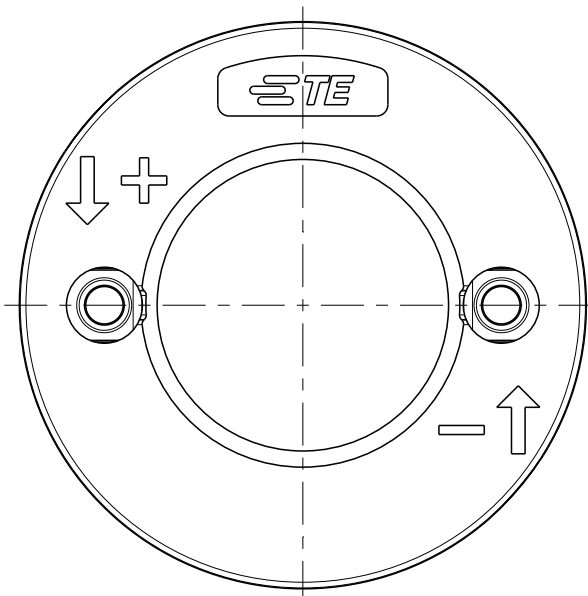


SECTION X - X

1.2 MAX.
LED HEIGHT


SEE DETAIL A

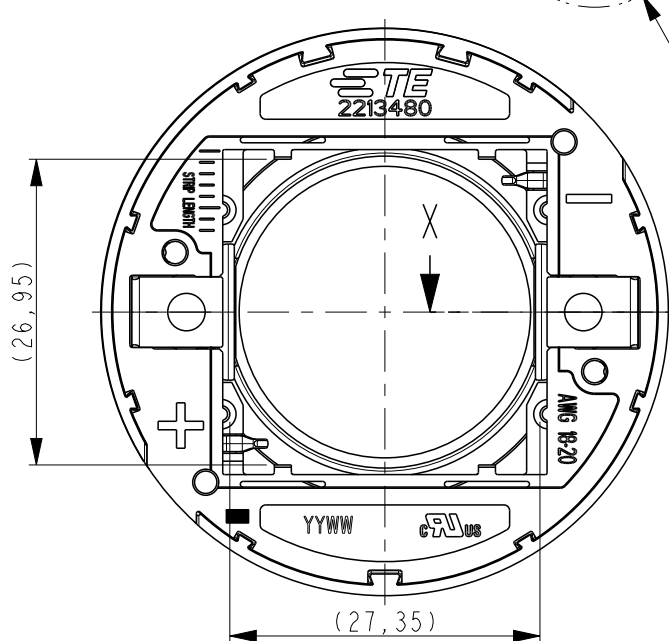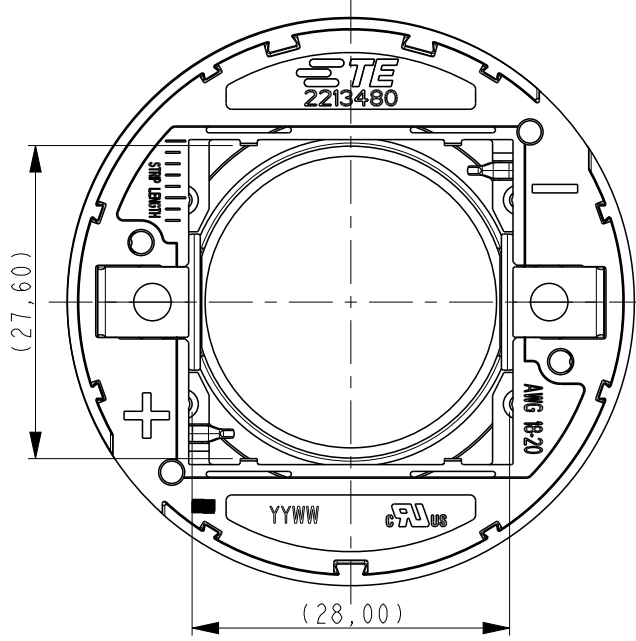

DETAIL A
SCALE 3:1

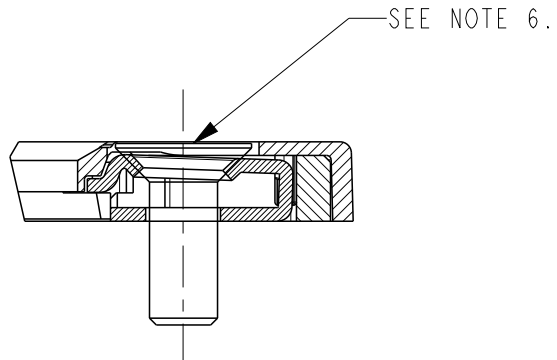


SEE NOTE 6.


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN P. POORTER 08APRIL2014	TE Connectivity				
DIMENSIONS: mm		CHK O. LEIJNSE 08APRIL2014					
	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±- 1 PLC ±- 2 PLC ±- 3 PLC ±- 4 PLC ±- ANGLES ±-	APVD O. LEIJNSE 08APRIL2014	NAME LUMAWISE Z50 high performance LED HOLDER -				
		PRODUCT SPEC 108-133018					
		APPLICATION SPEC -	SIZE A3	CAGE CODE 00779	DRAWING NO C-2213480	RESTRICTED TO -	
		WEIGHT -	Customer Drawing				

LOC H	DIST -	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
			-	SEE SHEET 1	-	-	-

RECOMMENDED DRILLING HOLE PATTERN:

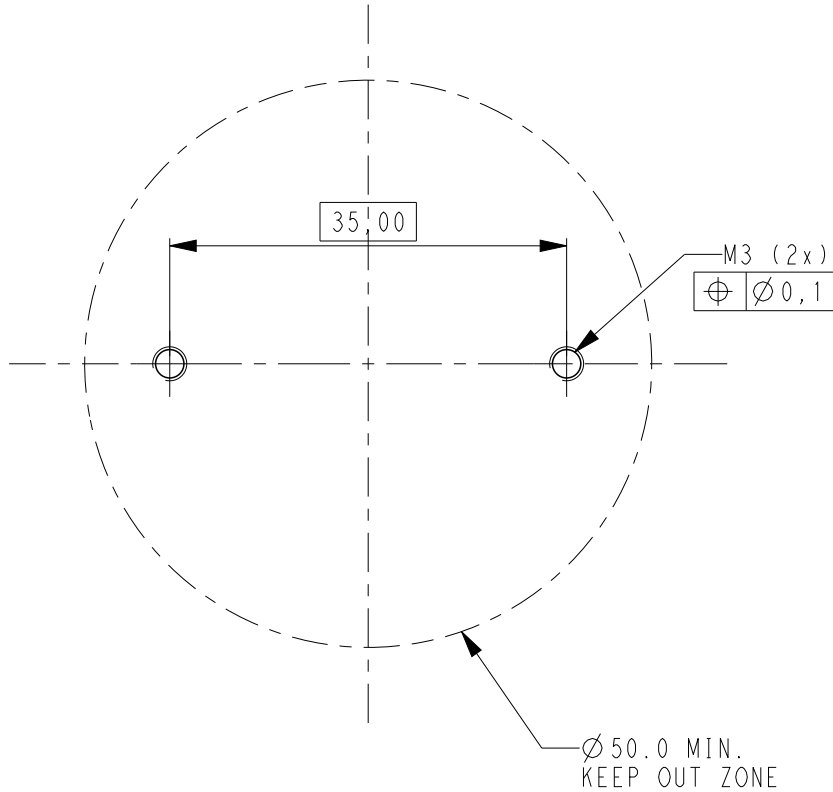


RECOMMENDED KEEP OUT AREA FOR CLAMPING:

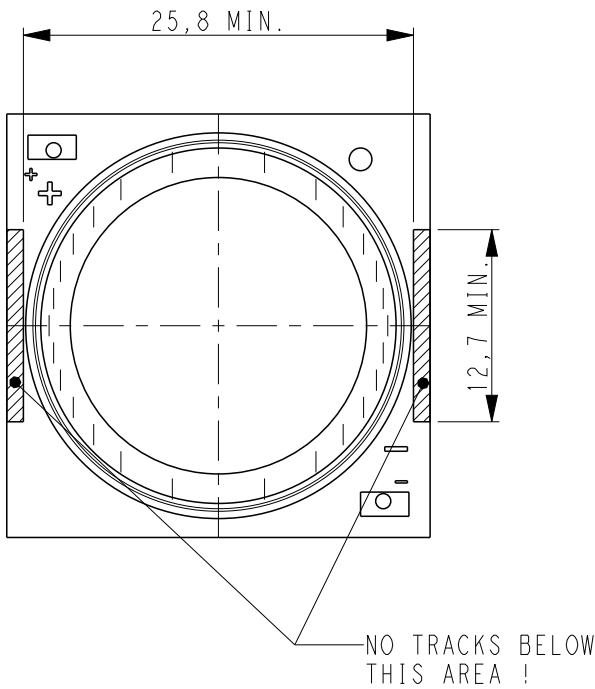


NOMINAL LED INFO:

THE SKETCH BELOW IS SHOWING THE NOMINAL LED COB DIMENSIONS TO MATCH WITH THE Z50 LED HOLDER 2828

FOR TECHNICAL DETAILS ABOUT A PROPER MATCH WITH A SPECIFIC LED COB ARRAY PLEASE CONTACT A REPRESENTATIVE AT TE-CONNECTIVITY

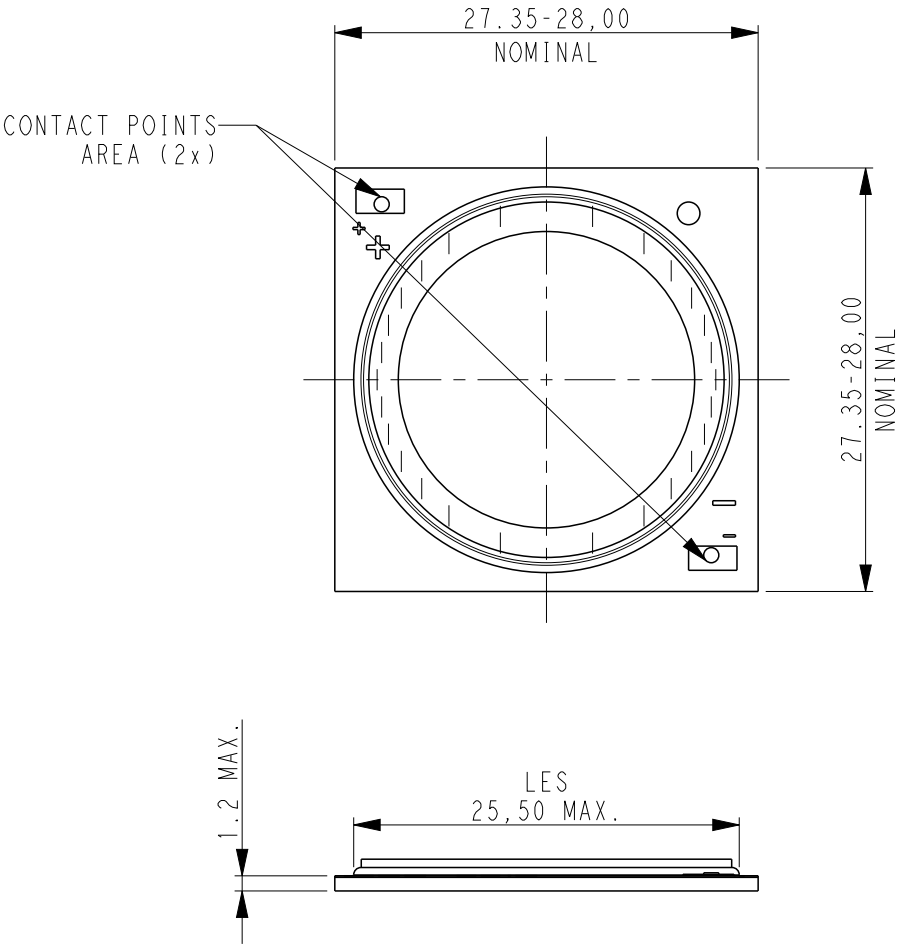

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN P. POORTER 08APRIL2014		TE TE Connectivity							
DIMENSIONS: mm		CHK O. LEIJNSE 08APRIL2014									
		APVD O. LEIJNSE 08APRIL2014		NAME LUMAWISE Z50 high performance LED HOLDER -							
		PRODUCT SPEC 108-133018									
		APPLICATION SPEC -									
		WEIGHT -									
MATERIAL -		FINISH -		SIZE A3		CAGE CODE 00779		DRAWING NO C-2213480		RESTRICTED TO -	
Customer Drawing				SCALE 3:2		SHEET 3		OF 3		REV C	