

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0192030100

Status:

Active

Description:

VersaKrimp™ Temp-Term Ring Tongue Terminal for 10 to 12 AWG Wire, Stud Size 10, Mylar Tape Carrier

Documents:

Drawing (PDF)

RoHS Certificate of Compliance (PDF)

Agency Certification

UL

E32244

General

Product Family

Ring and Spade Terminals

Series

19203

Comments

650°F (343°C)

Crimp Quality Equipment

Yes

Mil-Spec

N/A

Product Name

Temp-Terms, VersaKrimp™

Type

Ring

Physical

Barrel Type

Closed - Brazed

Insulation

None

Material - Plating Mating

Tin

Packaging Type

Adhesive Tape on Reel

Stud Size

10 (M5)

Wire Size AWG

10, 12

Wire Size mm²

4.00 - 6.00

Material Info

Old Part Number

C-T-328-10T

Reference - Drawing Numbers

Sales Drawing

CTCD30101



Series
image - Reference only

EU RoHS

ELV and RoHS

Compliant

REACH SVHC

Contains SVHC: No

Halogen-Free

Status

Not Reviewed

China RoHS

Need more information on product environmental compliance?

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series
19203Series

Application Tooling | [FAQ](#)
Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.
Global

Description	Product #
ATP Perishable Tool Kit, Used in ATP Presses that Process Product on Tape Mini-Mac™ Applicator	0190270088 0638851000

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

NOTES:

① MAT'L: COPPER (STOCK TKN $\frac{.040}{1.02}$)

PLATING: WATTS BATH NICKLE (.0002 MIN)

② BRAZED SEAM

③ 650°F MAX. OPERATING TEMP.

STUD SIZES: ($\pm .005$)

02 = .094 209 = .209

04 = .119 413 = .413

06 = .146

08 = .173

10 = .198


14 = .265

56 = .328

38 = .390

FILE NO.

C-T-CD-301-01

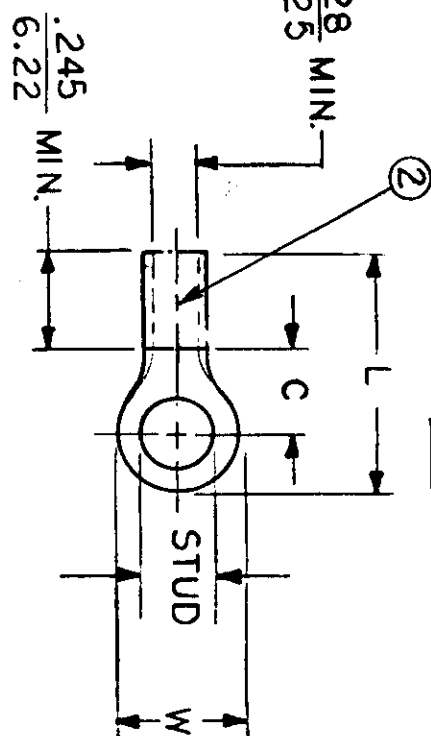

ALL DIMENSIONS = $\frac{\text{INCHES}}{\text{MM}}$

WIRE SIZE: 12-10 AWG
40-6.0 MM²

PART NUMBER	"W"	"C"	"L"	AVAILABLE STUD SIZES
	$\pm .010$	MIN.	MAX.	
C-T-301-	$\frac{.750}{19.05}$	$\frac{.611}{15.52}$	$\frac{1.280}{32.51}$	14, 56, 38, 76, 12
C-T-328-	$\frac{.375}{9.53}$	$\frac{.303}{7.70}$	$\frac{.785}{19.94}$	04, 06, 08, 10, 209
C-T-330-	$\frac{.530}{13.46}$	$\frac{.393}{9.98}$	$\frac{.952}{24.18}$	10, 14, 56, 38
C-T-336-	$\frac{.282}{7.16}$	$\frac{.306}{7.77}$	$\frac{.741}{18.82}$	04, 06, 08
C-T-340-	$\frac{.592}{15.04}$	$\frac{.468}{11.89}$	$\frac{1.056}{26.82}$	10, 14, 56, 38, 209, 413
DIMENSIONAL TOLERANCES UNLESS OTHERWISE SPECIFIED	REFERENCE	SCALE:	NTS	DATE
FRAC.	DEC.	ANG.	CHKD. BY:	11-28-84
$\pm$	$\pm$	$\pm$	APPRD. BY:	11-30-84
TITLE: RING TONGUE TEMP-TERM. 650°F MAX. VERSAKRIMP				
DWG. NO. A				CUSTOMER DWG.

ETC mox
INCORPORATED