


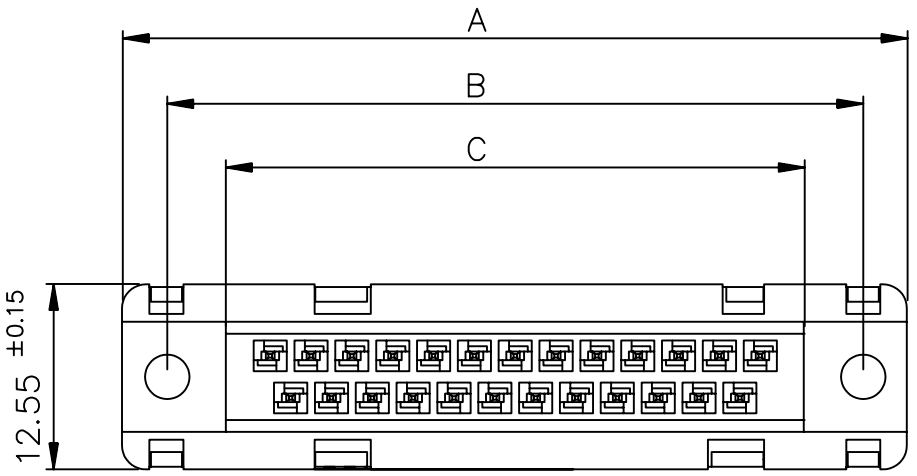


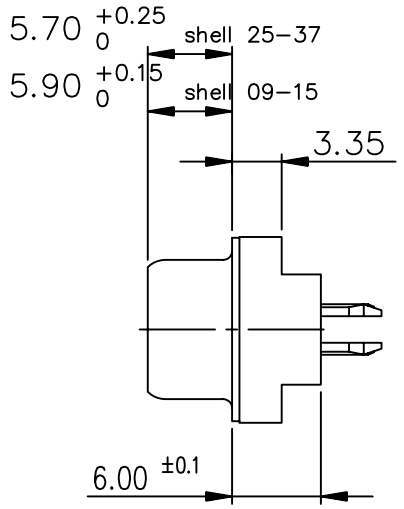

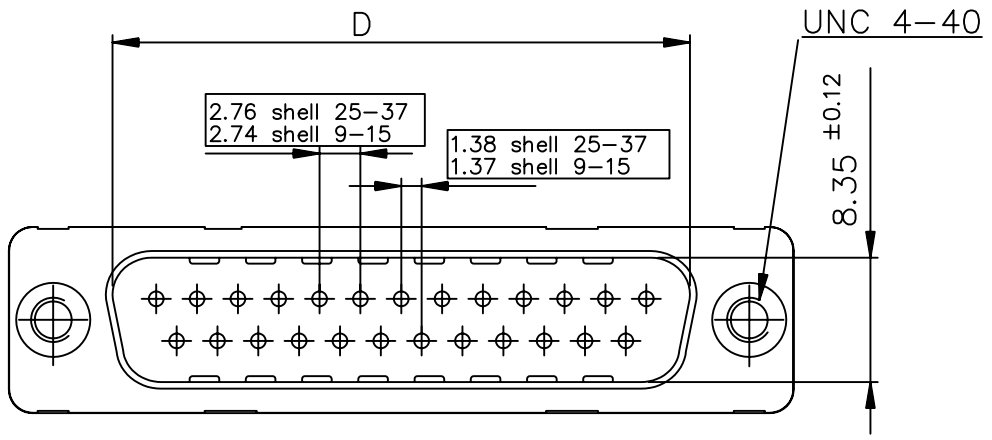

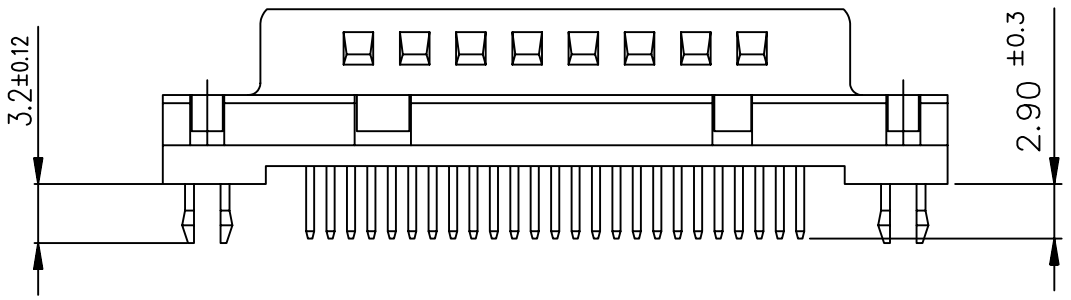

TIN LEAD PART NUMBER

SHELL	A±0.38	B±0.12	C±0.10	D±0.25 0	E±0.07	PART NUMBER
09	30.81	24.99	16.96	16.79	10.96	D09P24A.GX00
15	39.14	33.32	25.18	25.12	19.18	D15P24A.GX00
25	53.03	47.04	39.12	38.84	33.12	D25P24A.GX00
37	69.32	63.50	55.68	55.30	49.68	D37P24A.GX00

Protection: 4 –> flash AU
6 –> 0.76µ AU


LEAD FREE PART NUMBER

SHELL	A±0.38	B±0.12	C±0.10	D±0.25 0	E±0.07	PART NUMBER
09	30.81	24.99	16.96	16.79	10.96	D09P24A.GX00LF
15	39.14	33.32	25.18	25.12	19.18	D15P24A.GX00LF
25	53.03	47.04	39.12	38.84	33.12	D25P24A.GX00LF
37	69.32	63.50	55.68	55.30	49.68	D37P24A.GX00LF

Protection: 4 –> flash AU
6 –> 0.76µ AU

PC card drilling dimensions(after plating)

(thickness 1.60±0.20mm)

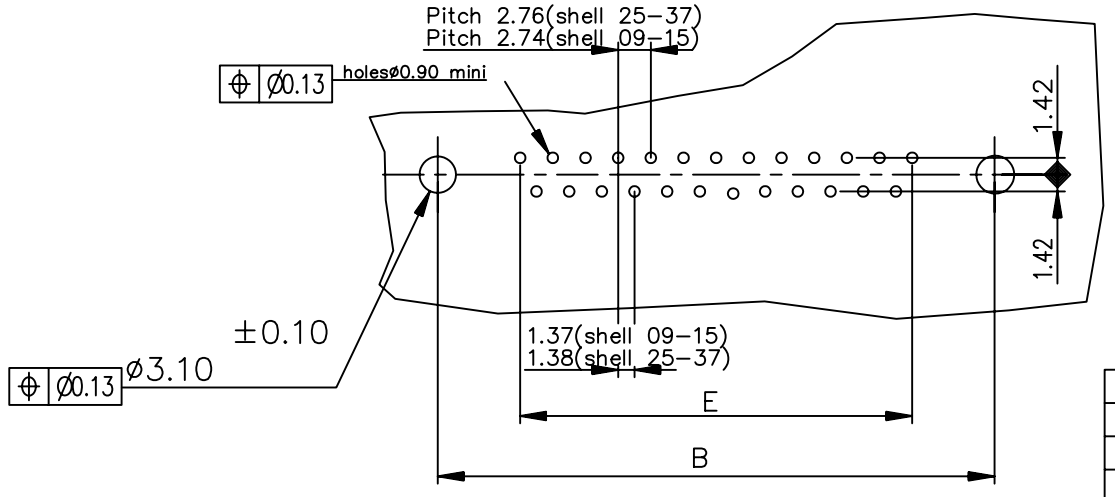

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:

SEE DRAWING C01–8646–0000

European Views

rev	ecn no	dr	date
C	–	JOU	1996/09/09
E	LS05–001	MPE	2005/03/11
F	LS05–0056	MPE	2005/06/27
G	LS06–0019	LGO	2006/02/07
H	LS06–0097	LGO	2006/07/29
J	I10–0038	NG	2010–02–03
–	–	–	–

www.fciconnect.com			surface ISO 1302 ✓	tolerance std ISO 406 ISO 1101		projection	mm
			TOLERANCES UNLESS OTHERWISE SPECIFIED				
Dr	LELEON	1992/09/10	ANGULAR	LINEAR	0.X ±0.1	size A3	Scale 2
Eng	PESSON	1992/09/10			0.XX ±0.1		
Chr	NIRMAL.G	2010–02–03	0.XX° ±2°		0.XXX ±0.1	ECN I10–0038	
Appr	SUDHIR.V	2010–02–03	Product family D–SUB			Spec ref –	
FCI	title	MALE CONNECTOR DELTA D ST straight,solder type for				dwg no C01–8646–0101	Rev. J
	catalog no –					CUSTOMER	sheet 1 of 1

Copyright FCI.

PDM: Rev:J STATUS:Released Printed: Jan 18, 2011