Lightning Surge Protectors for Electronics Equipment M-RESTER

M-RESTER TESTER

For Insuring Greater Reliability...

M-Resters have been designed to offer protection for many years through severe electrical storms.
After repeated storms and/or a severe storm where the surges may have exceeded the specification limits, there could be a deterioration of the internal components.
To insure they continues offering maximum protection, it should be tested after a severe electrical storm.
To facilitate testing, M-System offers the M-Rester Tester model C-106A-1 for testing most models in the MDP series.

MODEL: C-106A-1

ORDERING INFORMATION

• Code number: C-106A-1

APPLICABLE MODELS

•Signal line & pulse use (MDP-24-1, MDP-65-1)
•Signal line & pulse use, for photovoltaic system, instrument shelter (MDP-24T, MDP-65T)
•Thermocouple use (MDP-TC)
•RTD use (MDP-RB)
•Potentiometer use (MDP-PM)
•Low frequency pulse use (MDP-SP)
•RS-485/RS-422 use (MDP-4R)
•LonWorks use (MDP-LWA)
•PROFIBUS-PA use (MDP-PA)
•MsysNet use (MDP-DM3)
•DATA-M use (MDP-DM)
•EC-CABLE use (MDP-EC)
•Telemetering use (50 bps) (MDP-MFA)
•Telemetering use (3.4 kHz) (MDP-FT)
•DAST (coaxial cable) use (MFC)
•Telecommunication line use (MDP-TL)
•Power supply use (MDP-100, MDP-200)
•Power supply use, for photovoltaic system, instrument shelter (MDP-100T, MDP-200T)
•DC power supply use (MDP-D12, MDP-D24)
(The following models have been discontinued.)
•Signal line & pulse use (MDP-24, MDP-65)
•Signal line & pulse use (MD-24, MD-65)
•MsysNet use (MDP-DM2)

GENERAL SPECIFICATIONS

Casing Material: SPCC
Coating: Melamine resin
Color: Black

INSTALLATION

Power supply: R14 1.5 V batteries (8)
Weight: 3.3 kg (7.28 lbs)

EXTERNAL DIMENSIONS unit: mm (inch)

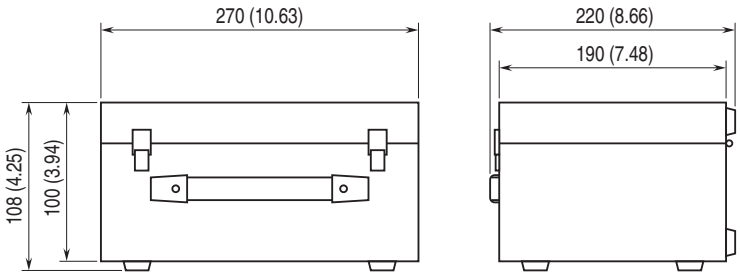

⚠ Specifications are subject to change without notice.