
Powerex, Inc., 200 Hillis Street, Youngwood, Pennsylvania 15697-1800 (412) 925-7272
Powerex, Europe, S.A. 428 Avenue G. Durand, BP107, 72003 Le Mans, France (43) 41.14.14

Phase Control SCR
1000 Amperes Average
3200 Volts

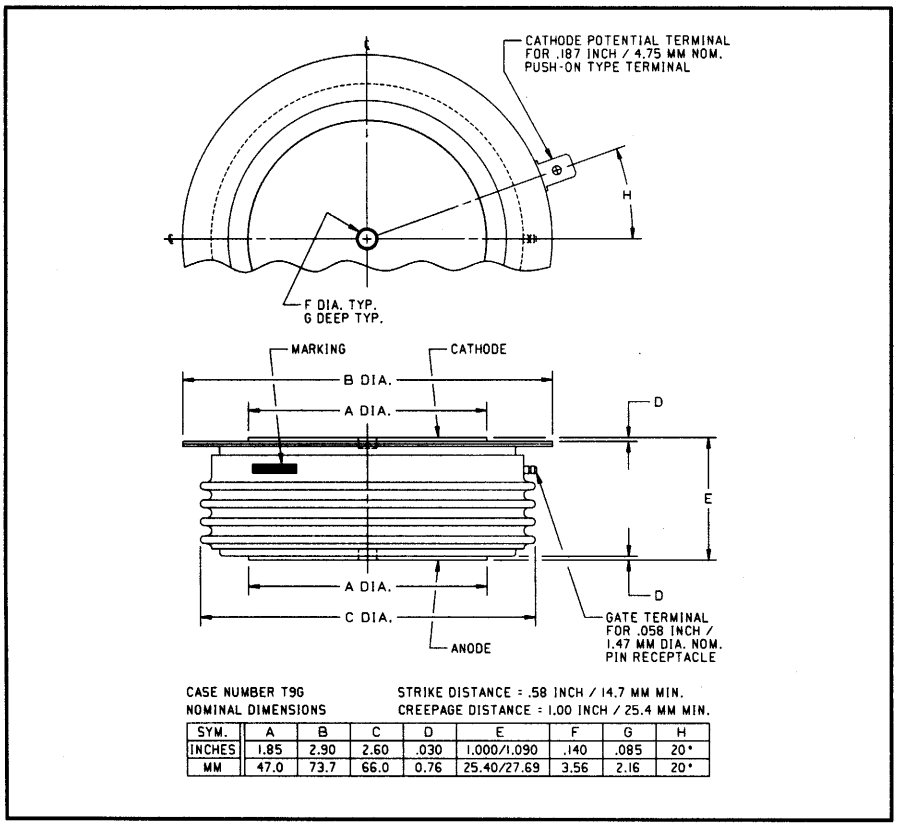

CASE NUMBER T9G
NOMINAL DIMENSIONS

STRIKE DISTANCE = .58 INCH / 14.7 MM MIN.
CREEPAGE DISTANCE = 1.00 INCH / 25.4 MM MIN.

SYM.	A	B	C	D	E	F	G	H
INCHES	1.85	2.90	2.60	.030	1.000/1.090	.140	.085	20°
MM	47.0	73.7	66.0	0.76	25.40/27.69	3.56	2.16	20°

C702 (Outline Drawing)



C702 Phase Control SCR
1000 Amperes Average, 3200 Volts

Description:
Powerex Silicon Controlled Rectifiers (SCR) are designed for phase control applications. These are all-diffused, Press-Pak, hermetic Pow-R-Disc devices employing the field proven amplifying gate.

Features:
- ☐ Low On-State Voltage
- ☐ High di/dt Capability
- ☐ High dv/dt Capability
- ☐ Hermetic Packaging
- ☐ Excellent Surge and I^2t Ratings

Applications:
- ☐ Power Supplies
- ☐ Motor Control

Ordering Information:
Select the complete six digit part number you desire from the table, i.e. C702CB is a 3200 Volt, 1000 Ampere Phase Control SCR.

Type	Voltage V_{DRM} V_{RRM}	Code	Current $I_{T(av)}$
C702	2400	LD	1000
	2600	LM	
	2800	LN	
	3000	CP	
	3200	CB	

Powerex, Inc., 200 Hillis Street, Youngwood, Pennsylvania 15697-1800 (412) 925-7272
Powerex, Europe, S.A. 428 Avenue G. Durand, BP107, 72003 Le Mans, France (43) 41.14.14

C702
Phase Control SCR
1000 Amperes Average, 3200 Volts

Absolute Maximum Ratings

Characteristics	Symbol	C702	Units
Non-repetitive Transient Peak Reverse Voltage	V_{RSM}	V_{RRM} + 100V	Volts
RMS On-state Current, T_C = 74°C	$I_{T(rms)}$	1570	Amperes
Average Current 180° Sine Wave, T_C = 74°C	$I_{T(av)}$	1050	Amperes
RMS On-state Current, T_C = 55°C	$I_{T(rms)}$	1880	Amperes
Average Current 180° Sine Wave, T_C = 55°C	$I_{T(av)}$	1200	Amperes
Peak One Cycle Surge On-state Current (Non-repetitive) 60Hz	I_{tsm}	15000	Amperes
Peak One Cycle Surge On-state Current (Non-repetitive) 50Hz	I_{tsm}	14000	Amperes
Critical Rate-of-rise of On-state Current (Non-repetitive)	di/dt	100	A/µsec
Critical Rate-of-rise of On-state Current (Repetitive)	di/dt	25	A/µsec
I^2t (for Fusing) for One Cycle, 60Hz	I^2t	933,000	A^2sec
Peak Gate Power Dissipation	P_{GM}	200	Watts
Average Gate Power Dissipation	$P_{G(av)}$	5	Watts
Operating Temperature	T_j	-40 to +125°C	°C
Storage Temperature	T_{stg}	-40 to +125°C	°C
Approximate Weight		1	lb.
		454	g
Mounting Force		5000 to 6000	lb.
		2220 to 2660	kg.

Powerex, Inc., 200 Hillis Street, Youngwood, Pennsylvania 15697-1800 (412) 925-7272
Powerex, Europe, S.A. 428 Avenue G. Durand, BP107, 72003 Le Mans, France (43) 41.14.14

C702
Phase Control SCR
1000 Amperes Average, 3200 Volts

Electrical Characteristics, T_j = 25°C Unless Otherwise Specified

Characteristics	Symbol	Test Conditions	Min.	Typ.	Max.	Units
Repetitive Peak Reverse Leakage Current	I_{RRM}	T_j = 125°C, $V_R = V_{RRM}$			65	mA
		T_j = 25°C, $V_R = V_{RRM}$			15	mA
Repetitive Peak Forward Leakage Current	I_{DRM}	T_j = 125°C, $V_D = V_{DRM}$			65	mA
		T_j = 25°C, $V_R = V_{RRM}$			15	mA
Peak On-state Voltage	V_{TM}	T_j = 125°C, I_T = 3000A Peak, Duty Cycle < 0.1%			2.26	Volts
Threshold Voltage, Low-level	$V_{(TO)1}$	T_j = 125°C, I = 15%, $I_{T(av)}$ to $\pi I_{T(av)}$			0.94963	Volts
Slope Resistance, Low-level	r_{T1}				0.1234	mΩ
Threshold Voltage, High-level	$V_{(TO)2}$	T_j = 125°C, I = $\pi I_{T(av)}$ to I_{TSM}			1.1007	Volts
Slope Resistance, High-level	r_{T2}				0.1149	mΩ
V_{TM} Coefficients, Low-level		T_j = 125°C, I = 15% $I_{T(av)}$ to $\pi I_{T(av)}$				
					A_1 = -0.007132	
					B_1 = 0.18721	
					C_1 = 1.589E-04	
					D_1 = -0.011393	
V_{TM} Coefficients, High-level		T_j = 125°C, I = $\pi I_{T(av)}$ to I_{TSM}				
					A_2 = 30.510	
					B_2 = -4.6029	
					C_2 = -2.083E-04	
					D_2 = 0.1610	
Typical Delay Time	t_d	Switching from 300V, Gate = 20V, 10Ω, 0.5µsec Rise Time		1.8		µsec
Minimum Critical dv/dt - Exponential to V_{DRM}	dv/dt	T_j = 125°C, V_{DRM} = 0.5 Rated, Gate Open	200			V/µsec
Gate Trigger Current	I_{GT}	T_C = 125°C, V_D = 10V, R_L = 3Ω			200	mA
Gate Trigger Voltage	V_{GT}	T_j = 0° to 125°C, V_D = 10V, R_L = 3Ω			4.5	Volts
Non-Triggering Gate Voltage	V_{GDM}	T_j = 125°C, $V_D = 0.5V_{DRM}$, R_L = 1000Ω			0.3	Volts
Peak Forward Gate Current	I_{GTM}				4	A
Peak Reverse Gate Voltage	V_{GRM}				5	Volts


Thermal Characteristics

Maximum Thermal Resistance, Double Sided Cooling						
Junction-to-Case	$R_{\theta(j-c)}$				0.023	°C/W
Case-to-Sink	$R_{\theta(c-s)}$				0.075	°C/W


Powerex, Inc., 200 Hillis Street, Youngwood, Pennsylvania 15697-1800 (412) 925-7272
Powerex, Europe, S.A. 428 Avenue G. Durand, BP107, 72003 Le Mans, France (43) 41.14.14

C702
Phase Control SCR
1000 Amperes Average, 3200 Volts


Maximum On-State Forward Voltage Drop
(Tj = 125 °C)

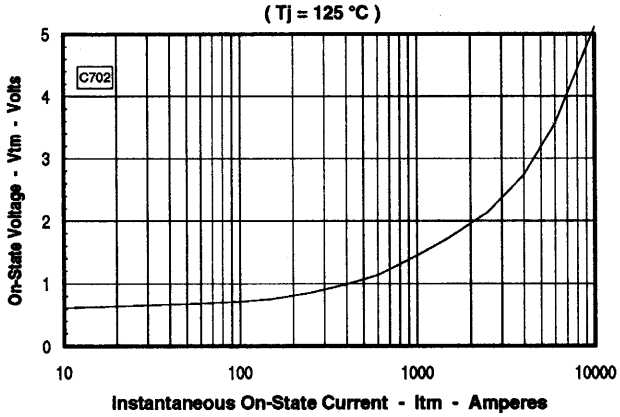


Maximum Transient Thermal Impedance
(Junction to Case)

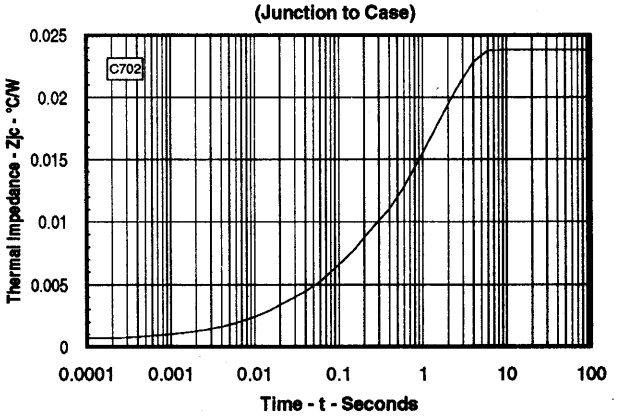


Maximum On-State Power Dissipation
(Sinusoidal Waveform)

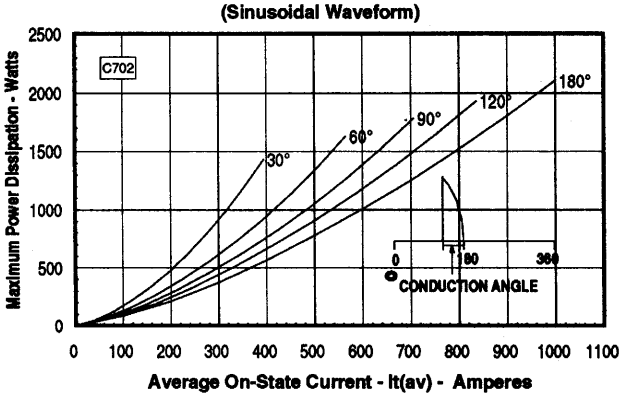

Maximum Allowable Case Temperature
(Sinusoidal Waveform)

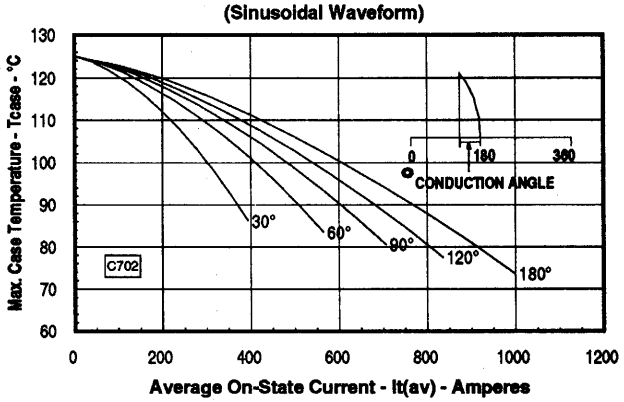

Maximum On-State Power Dissipation
(Rectangular Waveform)

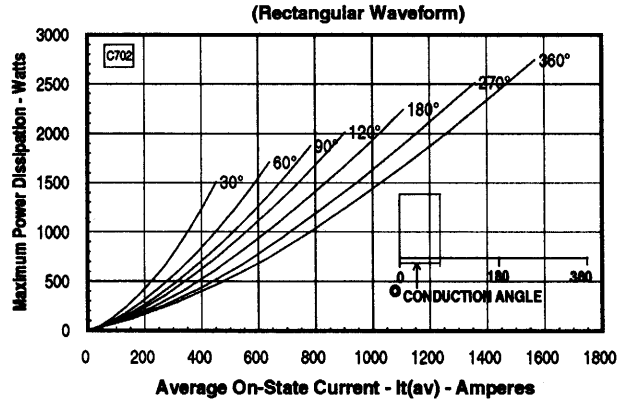

Maximum Allowable Case Temperature
(Rectangular Waveform)

