

Radial & Axial

Features

This widely used ceramic capacitors includes both monolithic and multilayer types to provide a wide capacitance range of 1pF through 1 μ F in respectively one standard size and shape(Radial & Axial).

Applications


The class1 temperature compensating(C0G) products can be used in circuits to stabilize frequency and temperature characteristics.

The X7R, Z5U, Y5V dielectrics are optimum for by pass capacitors.

Shape and Dimensions

Bulk Type


Radial Type

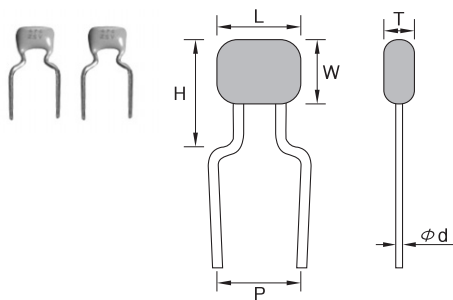


CODE	L Max.	W Max.	T Max.	H Max.	P ±0.7	Ød	Color	Marking
051B	5.5	5.5	3.2	6.4	5	0.5	Orange or Gold	Ex) 104
077B	7.7	7.6		9.2				

Flat Type

Radial Type

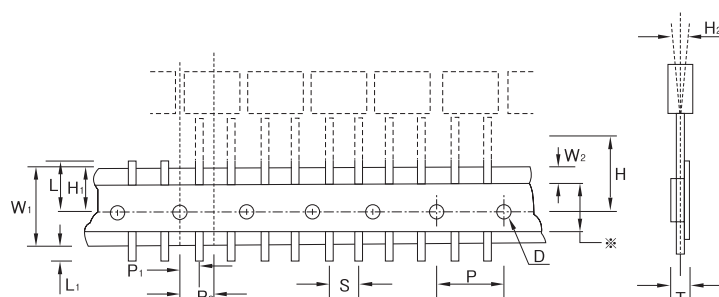

Axial Type

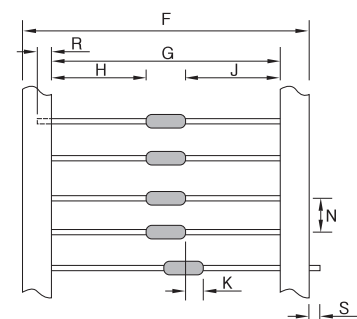

Code	Dimensions	Tolerance	Code	Dimensions	Tolerance
D(Ø)	4	±0.3	P1	3.85	±0.7
H	16	±0.5	P2	6.35	±1.3
H1	9	+0.76, -0.5	T	0.9	Max.
H2	0	±2	W1	18	±0.5
L	11	Max.	W2	0	+0.6 Max.
L1	1.5	Max.	S	5	±0.7
P	12.7	±0.3	*	No adhesive may be exposed	

Code	Dimensions	Tolerance
F	64.8	-0, +2
G	50.8-53.3	
H	=J	±1.2
J	=H	±1.2
K	0.8	Max.
N	5	±0.4
R	3.2	Min.

How to Order(Product Identification)

CA 2633 Y5V 104 Z 500 F

1

2

3

4

5

6

7

- 1

Type

CR : Radial Lead Type
CA : Axial Lead Type
- 2

Dimension Code

The number shows the maximum length of "L" by 1/10 in millimeter, and the alphabet means lead difference.(Refer to above diagram)

3 Temperature Coefficient Code

Temperature Characteristic	Temperature Range	Capacitance Change or Temperature Coefficient
C0G	-55 to 125℃	0±30ppm/℃
X7R	-55 to 125℃	±15%
Z5U	10℃ to 85℃	+22, -56%
Y5V	-30 to 85℃	+22, -82%

- 4

Capacitance Code(Pico Farads)

First two digits are significant; third digit denotes number of zeros.
Ex.) 101 = 100pF, 1R5 = 1.5pF, 103 = 10,000pF

5 Capacitance Tolerance Code

Code	Tolerance	Remark
J	± 5.0 %	C0G
K	±10 %	X7R, C0G
M	± 20 %	Z5U, X7R
Z	+80, -20%	Z5U, Y5V

6 Rated Voltage Code

Code	250	500	101
Volt	DC 25V	DC 50V	DC 100V

7 Packing Code

Code	B	R	F
Packing	Bulk	Reel Pack	Flat Pack

Reliability and Test Conditions

No.	Item	Characteristic					Test Methods and Conditions																																			
		Temperature Compensating Type	High Dielectric Constant Type																																							
1.	Operating Temperature Range	C0G : -55 to +125℃	X7R : -55 to +125℃ Z5U : +10 to +85℃ Y5V : -30 to 85℃																																							
2.	Insulation Resistance	More than 10,000MΩ or 500Ω.F (whichever is smaller)							Applied the rated voltage for 2 minute																																	
3.	Dielectric Strength	No detects or abnormalities							- C0G : The rated voltage×300% - X7R, Z5U, Y5V : " ×250%																																	
4.	Capacitance	Within the specified tolerance							Temperature Compensating Type																																	
5.	Dissipation Factor	30pF Min. : Q≥1,000(DF≤0.1%) 30pF Max. : Q≥400+20C (DF≤1/(400+20C))	<table><tr><th>Char.</th><th>50V Min.</th><th>25V</th><th>16V</th><th>10V</th></tr><tr><td>X7R</td><td>≤2.5%</td><td>≤3%</td><td>≤3.5%</td><td>≤5.0%</td></tr><tr><td>Z%V</td><td>≤4.0%</td><td>—</td><td>—</td><td>—</td></tr><tr><td>Y5V</td><td>≤5% (<220nF) ≤7% (≥220nF)</td><td>≤7%</td><td>≤9% (<220nF) ≤12.5% (≥220nF)</td><td>≤12.5%</td></tr></table>					Char.	50V Min.	25V	16V	10V	X7R	≤2.5%	≤3%	≤3.5%	≤5.0%	Z%V	≤4.0%	—	—	—	Y5V	≤5% (<220nF) ≤7% (≥220nF)	≤7%	≤9% (<220nF) ≤12.5% (≥220nF)	≤12.5%	<table><tr><th>Cap.</th><th>Testing Frequency</th><th>Testing Voltage</th></tr><tr><td>C0G (C≤1000pF)</td><td>1±0.1MHz</td><td>0.5 to 5V rms</td></tr><tr><td>C0G (C>1000pF)</td><td>1±0.1kHz</td><td>1±0.2V rms</td></tr><tr><td>X7R, Z5U, Y5V (C≤10μF 10V Min.)</td><td>1±0.1kHz</td><td>1±0.2V rms</td></tr></table>			Cap.	Testing Frequency	Testing Voltage	C0G (C≤1000pF)	1±0.1MHz	0.5 to 5V rms	C0G (C>1000pF)	1±0.1kHz	1±0.2V rms	X7R, Z5U, Y5V (C≤10μF 10V Min.)	1±0.1kHz	1±0.2V rms
Char.	50V Min.	25V	16V	10V																																						
X7R	≤2.5%	≤3%	≤3.5%	≤5.0%																																						
Z%V	≤4.0%	—	—	—																																						
Y5V	≤5% (<220nF) ≤7% (≥220nF)	≤7%	≤9% (<220nF) ≤12.5% (≥220nF)	≤12.5%																																						
Cap.	Testing Frequency	Testing Voltage																																								
C0G (C≤1000pF)	1±0.1MHz	0.5 to 5V rms																																								
C0G (C>1000pF)	1±0.1kHz	1±0.2V rms																																								
X7R, Z5U, Y5V (C≤10μF 10V Min.)	1±0.1kHz	1±0.2V rms																																								
6.	Terminal Strength	No evidence of damage to body of device of looseness of terminals.							A static load of 10N(1kgf) : applied to one terminal in the axial direction and acting in a direction away from the body for 1 to 5 secs.																																	

No.	Item	Characteristic					Test Methods and Conditions															
		Temperature Compensating Type	High Dielectric Constant Type																			
7.	Resistance to Soldering Heat	Appearance	No marked defect					- Soldering Temp : $260 \pm 5^{\circ}\text{C}$ - Immersion Time : $5 \pm 0.5\text{sec}$ - Take it out and set it for 24 ± 2 hours(temperature compensating type)or 48 ± 4hours(high dielectric constant type) then measure.														
		Capacitance Change	Within $\pm 2.5\%$ or $\pm 0.25\text{pF}$ (whichever is larger)	X7R : $\leq \pm 7.5\%$ Z5U, Y5V : $\leq \pm 20\%$																		
		Dissipation Factor(or Q)	30pF Min. : $Q \geq 1,000$ (DF $\leq 0.1\%$) 30pF Max. : $Q \geq 400 + 20\text{C}$ (DF $\leq 1/(400 + 20\text{C})$)	Char.	50V Min.	25V	16V		10V													
				X7R	$\leq 2.5\%$	$\leq 3\%$	$\leq 3.5\%$		$\leq 5.0\%$													
		Z5U	$\leq 4.0\%$	—	—	—																
		Y5V	$\leq 5\%$ (<220nF) $\leq 7\%$ ($\geq 220\text{nF}$)	$\leq 7\%$	$\leq 9\%$ (<220nF) $\leq 12.5\%$ ($\geq 220\text{nF}$)	$\leq 12.5\%$																
	I.R.	More than 10,000M Ω or 500 Ω .F (whichever & smaller)																				
8.	Temperature Cycle	Appearance	No marking defects					<table><tr><th>Step</th><th>1</th><th>2</th><th>3</th><th>4</th></tr><tr><td>Min. Operating Temp. +0, -3</td><td>Room Temp.</td><td>Max. Operating Temp. +3, -0</td><td>Room Temp.</td></tr><tr><td>Time (min)</td><td>30$\pm$3</td><td>2 to 3</td><td>30$\pm$3</td><td>2 to 3</td></tr></table> Take it out and set it for 24 ± 2 hours [tempeature compensating or 48 ± 4 hours(high dielectric Type) at room temperature, than measure.	Step	1	2	3	4	Min. Operating Temp. +0, -3	Room Temp.	Max. Operating Temp. +3, -0	Room Temp.	Time (min)	30 $\pm$ 3	2 to 3	30 $\pm$ 3	2 to 3
		Step	1	2	3	4																
		Min. Operating Temp. +0, -3	Room Temp.	Max. Operating Temp. +3, -0	Room Temp.																	
		Time (min)	30 $\pm$ 3	2 to 3	30 $\pm$ 3	2 to 3																
Capacitance Change	Within $\pm 2.5\%$ or $\pm 0.25\text{pF}$	X7R : Within $\pm 7.5\%$ Z5U, Y5V : Within $\pm 20\%$																				
Dissipation Factor(or Q)	30pF Min. : $Q \geq 1,000$ (DF $\leq 0.1\%$) 30pF Max. : $Q \geq 400 + 20\text{C}$ (DF $\leq 1/(400 + 20\text{C})$)	Char.	50V Min.	25V	16V	10V																
		X7R	$\leq 2.5\%$	$\leq 3\%$	$\leq 3.5\%$	$\leq 5.0\%$																
		Z5U	$\leq 4.0\%$	—	—	—																
		Y5V	$\leq 5\%$ (<220nF) $\leq 7\%$ ($\geq 220\text{nF}$)	$\leq 7\%$	$\leq 9\%$ (<220nF) $\leq 12.5\%$ ($\geq 220\text{nF}$)	$\leq 12.5\%$																
	I.R.	More than 10,000M Ω or 500 Ω .F (Whichever is smaller)																				
9.	Humidity Load	Appearance	No marking defects					- Temperature : $40 \pm 2^{\circ}\text{C}$ - Humidity : 90~95%RH - Hour : $500 \pm 12\text{hrs}$ - Test Voltage : Tge rated voltage - Take it out and set it for 24 ± 2 hours (temperature compensatig) or 48 ± 4 hours(high dielectric constant type) at room temperature, then measure. The charge/discharge current is less than 50mA.														
		Capacitance Change	Within $\pm 7.5\%$ or $\pm 0.75\text{pF}$ (whichever is larger)	X7R : Within $\pm 12.5\%$ Z5U : Within $\pm 30\%$ Y5V : Within $+30\%$, -40% (Y5V/1.0 μF , 2.2 μF , 4.7 μF /10V) Within $\pm 30\%$ (others)																		
		Dissipation Factor(or Q)	30pF Min. : $Q \geq 200$ (DF $\leq 0.5\%$) 30pF Max. : $Q \geq 100 + 10/3\text{C}$ (DF $\leq 1/(100 + 10/3\text{C})$)	Char.	50V Min.	25V	16V		10V													
				X7R	$\leq 5\%$	$\leq 5\%$	$\leq 5\%$		$\leq 5\%$													
		Z5U	$\leq 4.0\%$	—	—	—																
		Y5V	$\leq 7.5\%$	$\leq 10\%$ (<1 μF) $\leq 12.5\%$ ($\geq 1\mu\text{F}$)	$\leq 12.5\%$	$\leq 15\%$																
	I.R.	More than 500M Ω or 25 Ω .F (whichever is smaller)																				
10.	High Temperature Load	Appearance	No marked defect					- Testing Time : $1000 \pm 12\text{hrs}$ - Applied Voltage : Rated Voltage $\times 200\%$ - Temperature : C0G, X7R $\rightarrow 125 \pm 3^{\circ}\text{C}$ Z5U, Y5V $\rightarrow 85 \pm 3^{\circ}\text{C}$														
		Capacitance change	Within $\pm 3\%$ or $\pm 0.3\text{pF}$ (whichever is larger)	X7R : Within $\pm 12.5\%$, Z5U : Within $\pm 30\%$ Y5V : Within $\pm 30\%$ (Cap. < 1.0 μF) Within $+30\%$, -40% (Cap. $\geq 1.0\mu\text{F}$)																		

No.	Item		Characteristic					Test Methods and Conditions																											
			Temperature Compensating Type	High Dielectric Constant Type																															
10	High Temperature Load	Dissipation Factor(or Q)	30pF Min. : Q≥350 (DF≤0.3%) 10pF≤Cp≤30pF: Q≥275+5/2C (DF≤1/(275+5/2C)) 10pF Max. : Q≥200+10C (DF≤1/(200+10C))		<table><tr><th>Char.</th><th>50V Min.</th><th>25V</th><th>16V</th><th>10V</th></tr><tr><td>X7R</td><td>≤5%</td><td>≤5%</td><td>≤5%</td><td>≤5%</td></tr><tr><td>Z5U</td><td>≤4.0%</td><td>—</td><td>—</td><td>—</td></tr><tr><td>Y5V</td><td>≤7.5%</td><td>≤10% ($<1\mu\text{F}$) ≤7% ($\geq 1\mu\text{F}$)</td><td>≤12.5%</td><td>≤15%</td></tr></table>					Char.	50V Min.	25V	16V	10V	X7R	≤5%	≤5%	≤5%	≤5%	Z5U	≤4.0%	—	—	—	Y5V	≤7.5%	≤10% ($<1\mu\text{F}$) ≤7% ($\geq 1\mu\text{F}$)	≤12.5%	≤15%	Take it out and set it for 24±2 hours (temperature compensatig) or 48±4 hours(high dielectric constant type) at room temperature, then measure. The charge/discharge current is less than 50mA.					
		Char.	50V Min.	25V	16V	10V																													
		X7R	≤5%	≤5%	≤5%	≤5%																													
Z5U	≤4.0%	—	—	—																															
Y5V	≤7.5%	≤10% ($<1\mu\text{F}$) ≤7% ($\geq 1\mu\text{F}$)	≤12.5%	≤15%																															
I.R.	More than 1000MΩ or 50ΩF(Whichever is smaller)																																		
11	Capacitance Temperature Characteristics	Capacitance Change			<table><tr><th>Char.</th><th>Temp. Range</th><th>Reference Temp.</th><th>Cap. Change</th></tr><tr><td>X7R</td><td>-55 to +125℃</td><td rowspan="3">25℃</td><td>Within ±15%</td></tr><tr><td>Z5U</td><td>-10 to +85℃</td><td>Within +22% -56%</td></tr><tr><td>Y5V</td><td>-30 to +85℃</td><td>Within +22% -82%</td></tr></table>				Char.	Temp. Range	Reference Temp.	Cap. Change	X7R	-55 to +125℃	25℃	Within ±15%	Z5U	-10 to +85℃	Within +22% -56%	Y5V	-30 to +85℃	Within +22% -82%	(1) Temperature Compensating Type : The temperature coefficient is determined using the capacitance measured in step 3 as a reference. When cycling the temperature sequentially from step 1 through 5. (SL: +25 to 85℃) the capacitance shall be with in the specified tolerance for the temperature coefficient. The capacitance drift is calculated dividing the difference between the maximum measured values in the step 1, 3 and 5 by Cap, value in step 3. <table><tr><th>Step</th><th>Temperature(℃)</th></tr><tr><td>1</td><td>25±2</td></tr><tr><td>2</td><td>-55±3</td></tr><tr><td>3</td><td>25±2</td></tr><tr><td>4</td><td>125±3(for C0G)</td></tr><tr><td>5</td><td>25±2</td></tr></table> (2) High Dielectric Constant Type : The ranges of capacitance change compared with the 25℃ value over the temperature range shown in the table shall be in the specified range.	Step	Temperature(℃)	1	25±2	2	-55±3	3	25±2	4	125±3(for C0G)	5	25±2
		Char.	Temp. Range	Reference Temp.	Cap. Change																														
		X7R	-55 to +125℃	25℃	Within ±15%																														
Z5U	-10 to +85℃	Within +22% -56%																																	
Y5V	-30 to +85℃	Within +22% -82%																																	
Step	Temperature(℃)																																		
1	25±2																																		
2	-55±3																																		
3	25±2																																		
4	125±3(for C0G)																																		
5	25±2																																		
Temperature Coefficient	<table><tr><th>Char.</th><th>Temp. Range</th><th>Temperature Coefficient</th></tr><tr><td>C0G</td><td>-55 to +125℃</td><td>±30ppm/℃</td></tr></table>	Char.	Temp. Range	Temperature Coefficient	C0G	-55 to +125℃	±30ppm/℃																												
Char.	Temp. Range	Temperature Coefficient																																	
C0G	-55 to +125℃	±30ppm/℃																																	
12	The regulation of environmental pollution materials		※Never use materials mentioned below in leaded MLCC products regulated this document. Pb, Cd, Hg, Cr ⁶⁺ , PBB(polybromida biphenyl), PBDE(polybrominated diphenyl ethers), asbestos.																																
13	The regulation about destructive materials of the ozone layer		Never use the ODS(ozone depleting substance) materials below in leaded MLCC products regulated this document.																																

Packing Quantity

Unit : pcs

Radial Type			Axial Type		
Inner Box	Outer Box	Remark	Inner Box	Outer Box	Remark
2,500	15,000	Packing set on the basis of flat tapping	5,000	50,000	Packing set on the basis of flat tapping

Capacitance Range

Type Char.	Volt	Radial							Axial			
		C0G		X7R		Z5U	Y5V		C0G	X7R	Z5U	Y5V
Cap(pF)		50	100	50	100	50	16	50	50	50	50	50
1												
2												
3												
4												
5												
6												
7												
8												
9												
10												
12												
15												
16												
18												
20												
22												
24												
27												
30												
33												
36												
39												
43												
47												
51												
56												
62												
68												
75												
82												
91												
100												
120												
150												
180												
220												
270												
330												
390												
470												
560												
680												
820												
1.000												
1.200												
1.500												
1.800												
2.200												
2.700												
3.300												
3.900												
4.700												
5.600												
6.800												
8.200												
10.000												
15.000												
22.000												
33.000												
47.000												
68.000												
100.000												
150.000												
220.000												
330.000												
470.000												
680.000												
1.000.000												