
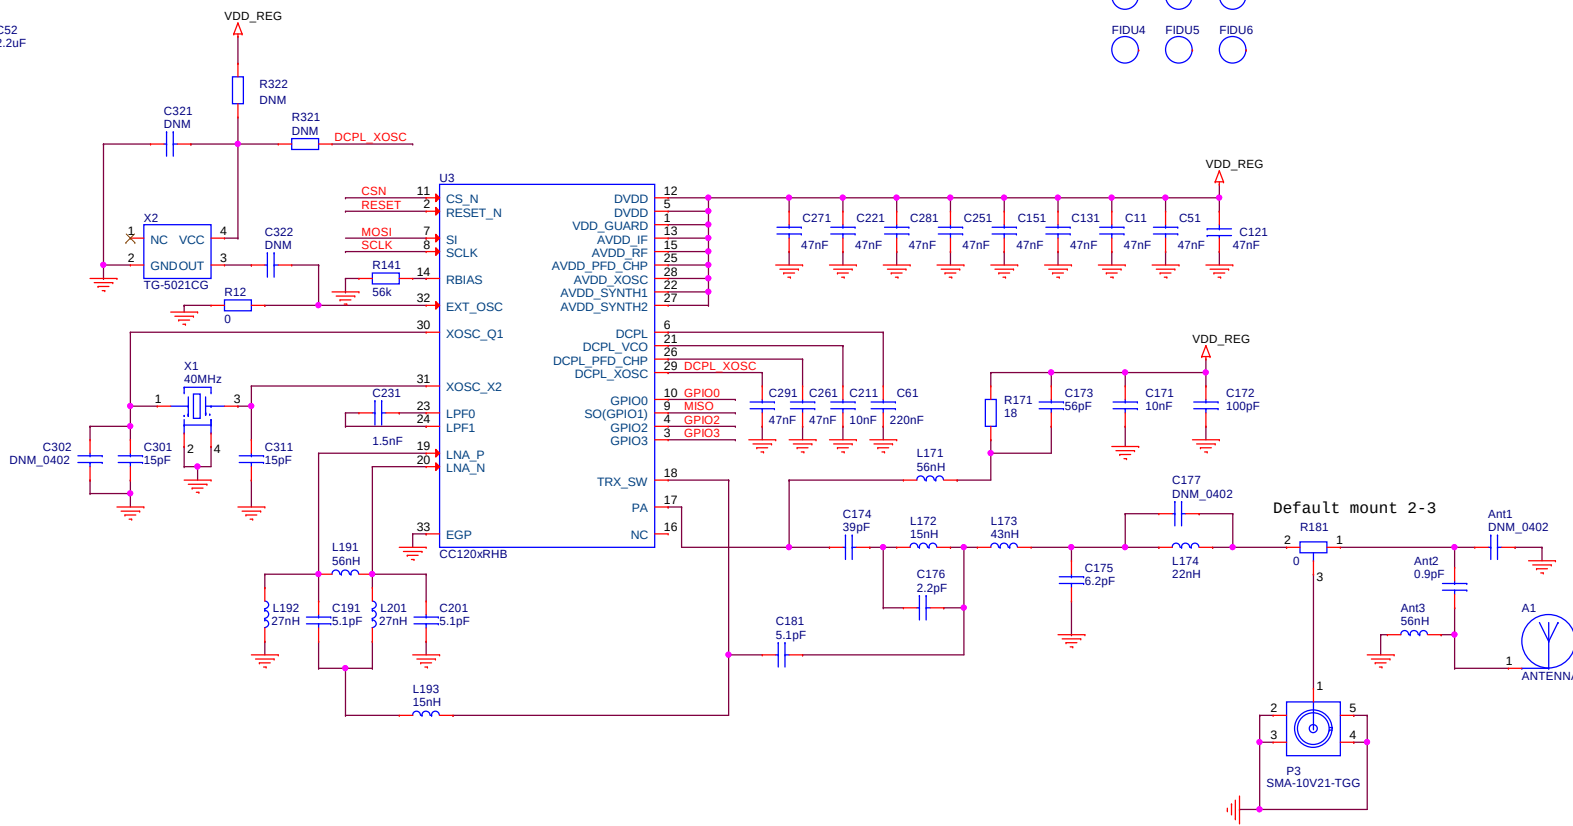



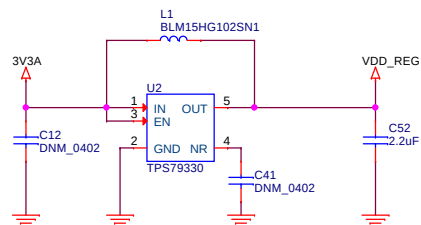


L1 is a Bead to be mounted if the regulator U2 and capacitors C12 and C41 are not mounted. By default the regulator is not mounted

CC120x using XTAL: do not mount X2, C321, C322 R321, R322  
CC120x using TCXO: do not mount R12, R321, C311, X1, C301: mount 0 Ohm resistor

R12 is a 0 Ohms shunt resistor that ground the EXT\_OSC pin when TCXO is not mounted



Friday, January 25, 2013

| Size  | CAGE Code | DWG NO              | Rev |
|-------|-----------|---------------------|-----|
| A3    |           | CC120xEM 420-470MHz | A   |
| Scale | Sheet     |                     | Rev |
|       | 1 of 1    |                     |     |