

TI CC3000 Evaluation Module

User's Guide



Literature Number: SWRU326
November 2012

Preface	4
1 Introduction	5
2 CC3000 EM Board	6
2.1 EM Board Top View	6
2.2 EM Board Bottom View	9
2.3 Antenna	10
2.4 Hardware Setup	13
2.5 Schematics	14
2.6 Bill of Materials (BOM)	15
3 Layout Guidelines	16
4 Application Development	21

List of Figures

2-1.	CC3000 EM Board Top View.....	6
2-2.	CC3000 EM Board Bottom View.....	9
2-3.	Antenna Location and RF Trace Routing	10
2-4.	Matching Circuit Between the Antenna and the CC3000 EM Board	11
2-5.	Return Loss from the ACX Antenna and Matching Circuit.....	11
2-6.	Antenna Radiation Patterns	12
2-7.	Host PCB Mating Connector Arrangement	13
2-8.	Schematics of the CC3000 EM Board.....	14
3-1.	Module Layout Guidelines.....	16
3-2.	Module Layout Guidelines.....	17
3-3.	Trace Design for the PCB Layout	18
3-4.	Layer 1 Combined With Layer 2.....	18
3-5.	Antenna and RF Trace Routing Layout Guidelines	19
3-6.	Power Supply Routing of the CC3000 EM Board	20
4-1.	MSP-EXP430FR5739 Test Platform and CC3000 EM Board	21

List of Tables

2-1.	Key Parts of CC3000 EM Board Top View	7
2-2.	J2 Configuration of the CC3000 EM Board.....	7
2-3.	Header J4 of the CC3000 EM Board Top View.....	7
2-4.	Header J5 of the CC3000 EM Board Top View.....	8
2-5.	Header J6 of CC3000 EM Board Bottom View	9
2-6.	J7 of CC3000 EM Board Bottom View	9
2-7.	BOM for the TI CC3000 EM Board.....	15
3-1.	Module Layout Guidelines.....	17
3-2.	Trace Design Measurement Values	18
3-3.	Antenna and RF Trace Routing Layout Guidelines	19

Read This First

About This Manual

This user guide describes how to use the TI CC3000 evaluation module (EM) board to evaluate the performance of the TI CC3000 module.

Related Documentation From Texas Instruments

- *TI SimpleLink™ CC3000 Module – Wi-Fi 802.11b/g Network Processor Data Sheet* (SWRS126)
- CC3000 Wiki for MCU: http://processors.wiki.ti.com/index.php/CC3000_Wi-Fi_for_MCU

If You Need Assistance

The primary sources of CC3000 information are the device-specific data sheets and user's guides. For the most up-to-date version of the user's guide and data sheets, go to <http://www.ti.com/product/cc3000>.

FCC Warning

This equipment is intended for use in a laboratory test environment only. It generates, uses, and can radiate radio frequency energy and has not been tested for compliance with the limits of computing devices pursuant to subpart J of part 15 of FCC rules, which are designed to provide reasonable protection against radio frequency interference. Operation of this equipment in other environments may cause interference with radio communications, in which case the user at his own expense will be required to take whatever measures may be required to correct this interference.

Introduction


This user guide describes how to use the TI CC3000 evaluation module (EM) board to evaluate the performance and functionality of the TI CC3000 module. The CC3000 module is a self-contained Wi-Fi® solution that enables internet connectivity for a wide variety of microcontroller (MCU) systems. The SimpleLink Wi-Fi from TI minimizes the host MCU software requirements, making it ideal for low-power and low-cost applications. The CC3000 EM board is targeted for TI MCUs, such as the MSP430-FR5739 and other various host platforms. This document details the key parts and features of the CC3000 EM board and the different options available to the user. This document includes layout guidelines to assist the designer in PCB development.

CC3000 EM Board

This section describes the key parts and features of the CC3000 EM board top and bottom views.

2.1 EM Board Top View

Figure 2-1 shows the key parts and jumpers mounted on the top of the CC3000 EM board. Table 2-1 describes the key parts of the EM board. Table 2-2 describes the J2 configuration of the CC3000 EM board. Table 2-3 and Table 2-4 describe the J4 and J5 signals, respectively.

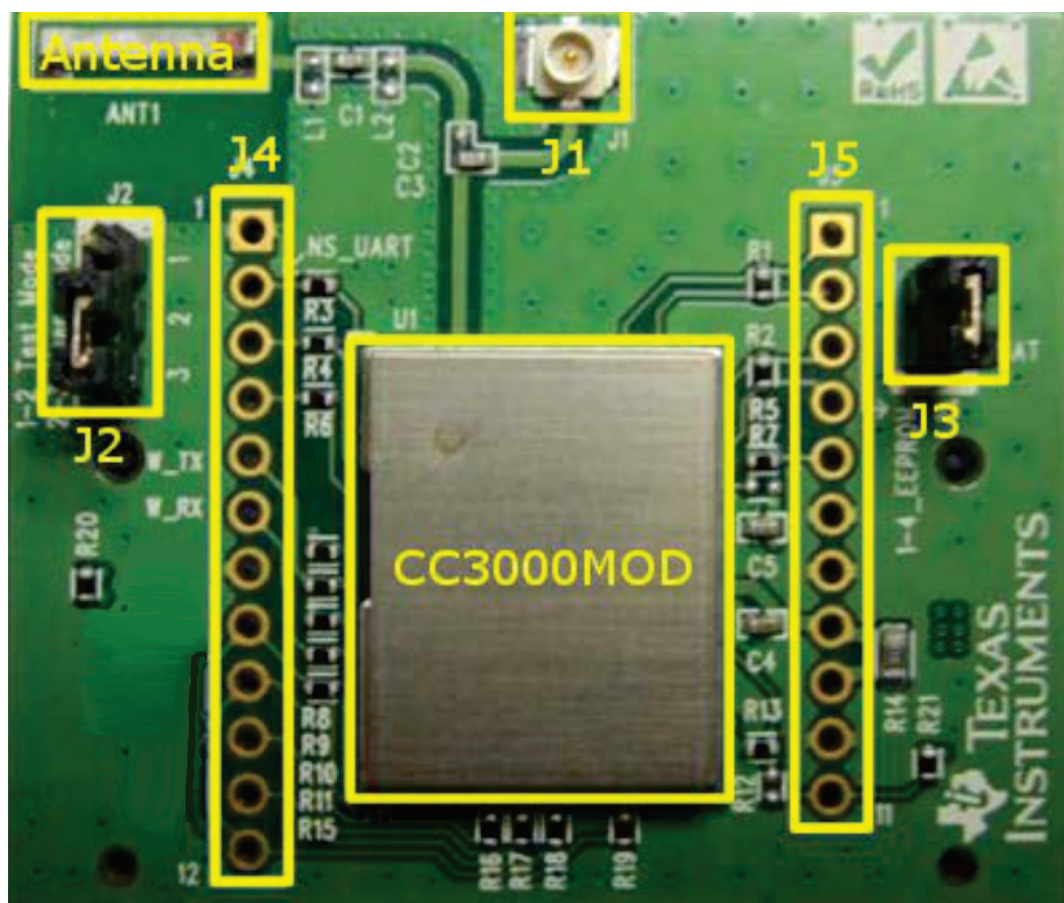

SWRU326-001

Figure 2-1. CC3000 EM Board Top View

Table 2-1. Key Parts of CC3000 EM Board Top View

Key Parts	Descriptions
CC3000MOD	Core module for performance evaluation (for more information, see the CC3000 module data sheet).
Antenna	Can be used for radiated testing by reworking the capacitor to correct pads
J1	U.FL RF connector used for conductive RF test
J2	Used to switch between test mode and operation mode. When pins 2 and 3 are shorted, J2 runs in operation mode. When pins 1 and 2 are shorted, J2 runs in test mode.
J3	Used to test power consumption. The pins of the jumper are shorted in operation mode. For power testing, the jumper is removed and an ammeter bridges the pins.
J4	Through-hole test points (For more information, see Table 2-3.)
J5	Through-hole test points (For more information, see Table 2-4.)

Table 2-2. J2 Configuration of the CC3000 EM Board

Mode	Description
Test mode: CC3000 radio tool ⁽¹⁾	Connect pins 1 and 2. Test mode is used with the CC3000 radio tool for operating, testing, and calibrating the CC3000 chip-set designs during development. This tool uses the RS232/UART pins to run radio frequency (RF) RX and TX tests on the CC3000 module. For more information, see the CC3000 wiki.
Functional mode: Normal mode	Connect pins 2 and 3. Normal mode is for regular functionality between the host platform and the CC3000 module.

⁽¹⁾ For more information about test software for the PC, go to the CC3000 wiki at http://processors.wiki.ti.com/index.php/CC3000_Wi-Fi_for_MCU.

Table 2-3. Header J4 of the CC3000 EM Board Top View

J4 Pin	Pin Name	Pin Type	Descriptions
1	GND	–	Ground
2	Reserved	–	Reserved
3	Reserved	–	Reserved
4	Reserved	–	Reserved
5	WL_RS232_TX	Output	RS232 transmit output; used for the radio tool serial interface in test mode. Leave floating in functional mode.
6	WL_RS232_RX	Input	RS232 receive output; used for the radio tool serial interface in test mode. Leave floating in functional mode.
7	GND	–	Ground
8	WL_SPI_CS	Input	Host interface SPI chip select
9	WL_SPI_DOUT	Output	Host interface SPI data output
10	WL_SPI_IRQ	Output	Host interface SPI interrupt request
11	WL_SPI_DIN	Input	Host interface SPI data input
12	WL_SPI_CLK	Input	Host interface SPI clock input


Table 2-4. Header J5 of the CC3000 EM Board Top View

J5 Pin	Pin Name	Pin Type	Descriptions
1	SCL_CC3000 ⁽¹⁾	Output	I2C clock signal output from the CC3000 module. This pin is connected to SCL_EEPROM through a 0-Ω resistor and is not used by end users.
2	SCL_EEPROM ⁽¹⁾	Input	I2C clock signal input from EEPROM inside the CC3000 module. This pin is connected to SCL_CC3000 using a 0-Ω resistor and is not used by end users.
3	SDA_CC3000 ⁽¹⁾	Input/Output	I2C data signal from the CC3000 module. This pin is connected to SDA_EEPROM using a 0-Ω resistor and is not used by end users.
4	SDA_EEPROM ⁽¹⁾	Input/Output	I2C data signal from EEPROM inside the CC3000 module. This pin is connected to the SDA_CC3000 device using a 0-Ω resistor and is not used by end users.
5	VBAT_SW_EN	Input	Active-high enables the signal from the host device.
6	GND	–	Ground
7	GND	–	Ground
8	VIO_HOST	Power In	VIO power supply from the host to the module. For the MSP430 host platform, VIO_HOST = VBAT_IN. For other platforms that have different voltage levels from battery voltages, R14 can be removed.
9	VBAT_IN	Power In	Battery voltage input to module. For the MSP430 host platform, VIO_HOST = VBAT_IN. For other platforms that have different voltage levels from the battery voltages, R14 can be removed.
10	GND	–	Ground
11	Reserved	–	Reserved

⁽¹⁾ The EM board arrives with EEPROM preprogrammed.

2.2 EM Board Bottom View

The two EM board mating connectors J6 and J7 connect to the host platform and are mounted on the bottom of the EM board, as shown in [Figure 2-2](#). [Table 2-5](#) and [Table 2-6](#) describe the signals brought out from these two EM mating connectors.

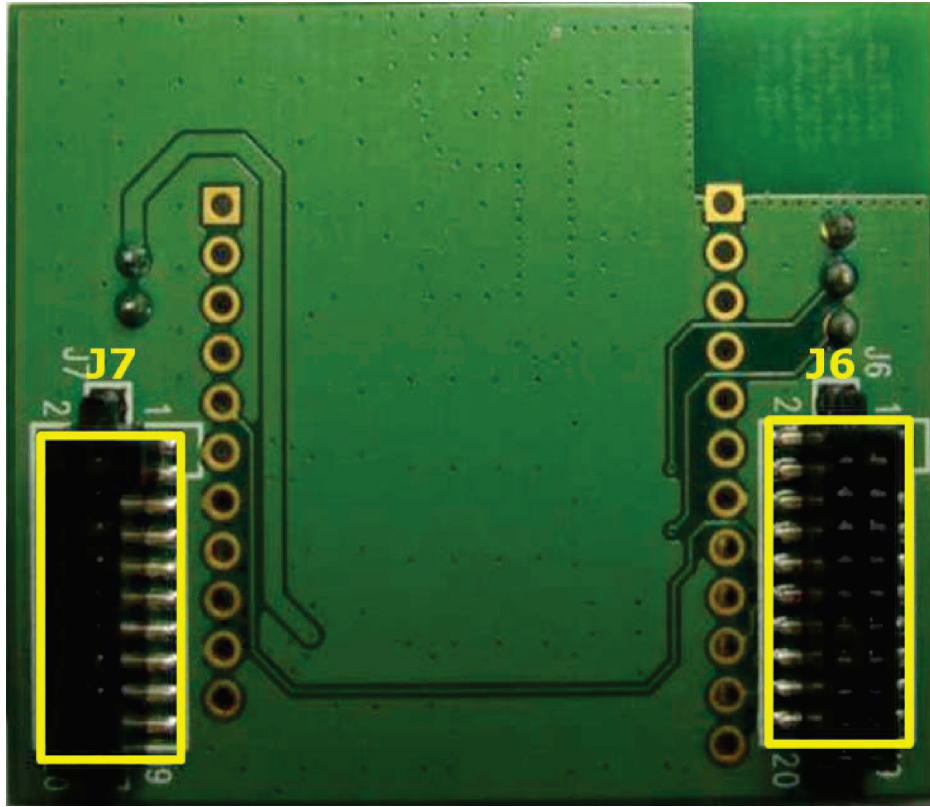

SWRU326-002

Figure 2-2. CC3000 EM Board Bottom View

Table 2-5. Header J6 of CC3000 EM Board Bottom View

J6 Pin	Pin Name	Module Pin Type	Description
1	GND	–	Ground
5	Reserved	–	Reserved
10	VBAT_SW_EN	Input	Active-high enable signal from the host device
12	WL_SPI_IRQ	Output	Host interface SPI interrupt request
14	WL_SPI_CS	Input	Host interface SPI CS
16	WL_SPI_CLK	Input	Host interface SPI clock input
18	WL_SPI_DIN	Input	Host Interface SPI data input
19	GND	–	Ground
20	WL_SPI_DOUT	Output	Host interface SPI data output

Table 2-6. J7 of CC3000 EM Board Bottom View

J7 Pin	Pin Name	Module Pin Type	Description
2	GND	–	Ground
7	VBAT_IN	Power In	Battery voltage input to the module
9	VBAT_IN	Power In	Battery voltage input to the module
15	Reserved	–	Reserved

2.3 Antenna

The ACX ceramic antenna is mounted on the EM board with a specific layout and matching circuit for the radiation tests conducted in FCC, CE, and IC certifications. [Figure 2-3](#) shows the location of the ACX ceramic antenna on the EM board and the RF trace routing from the CC3000 module to the antenna. [Figure 2-4](#) shows the matching circuit between the antenna and the EM board. The return loss is based on the matching circuit and RF trace routing, as shown in [Figure 2-5](#). [Figure 2-6](#) shows the radiation patterns on XY, XZ, and YZ planes.



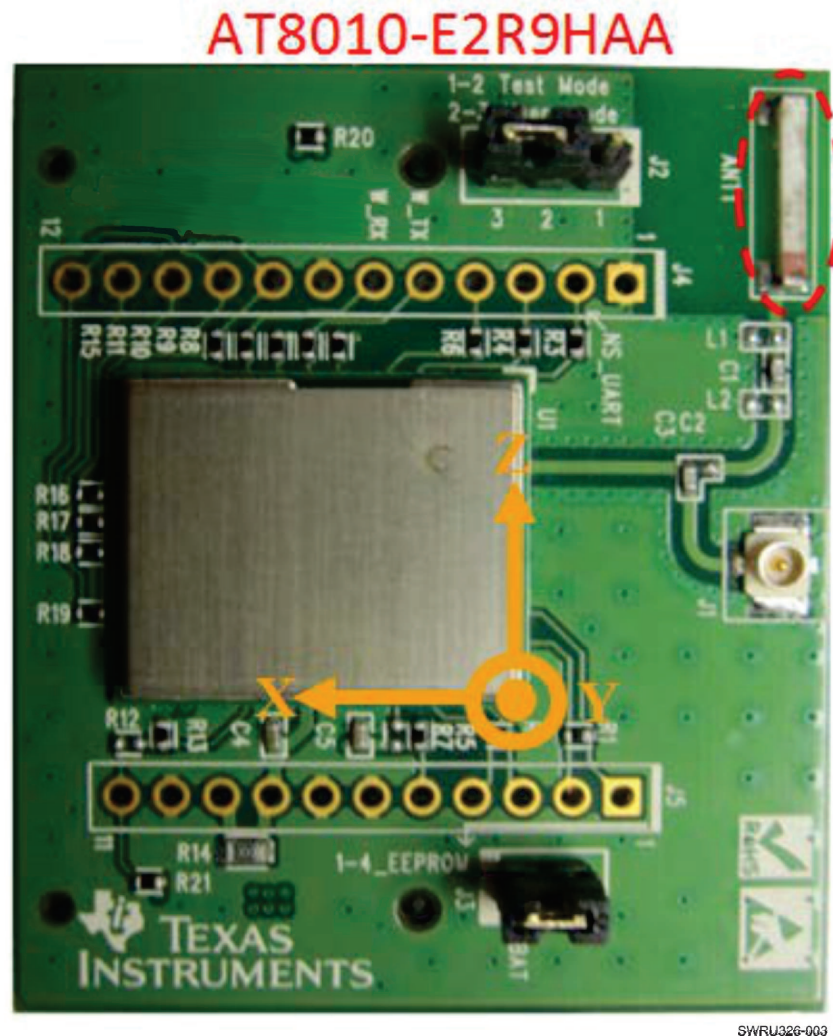


Figure 2-3. Antenna Location and RF Trace Routing

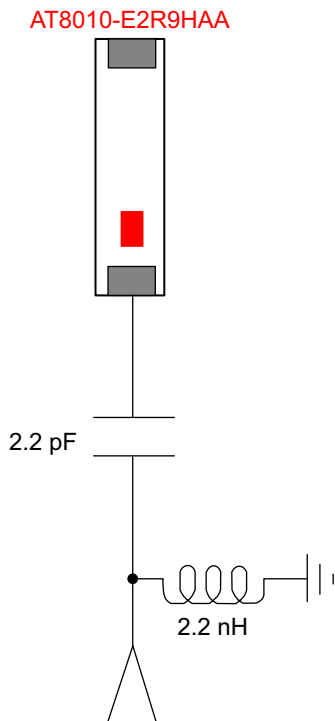

SWRU326-004


Figure 2-4. Matching Circuit Between the Antenna and the CC3000 EM Board

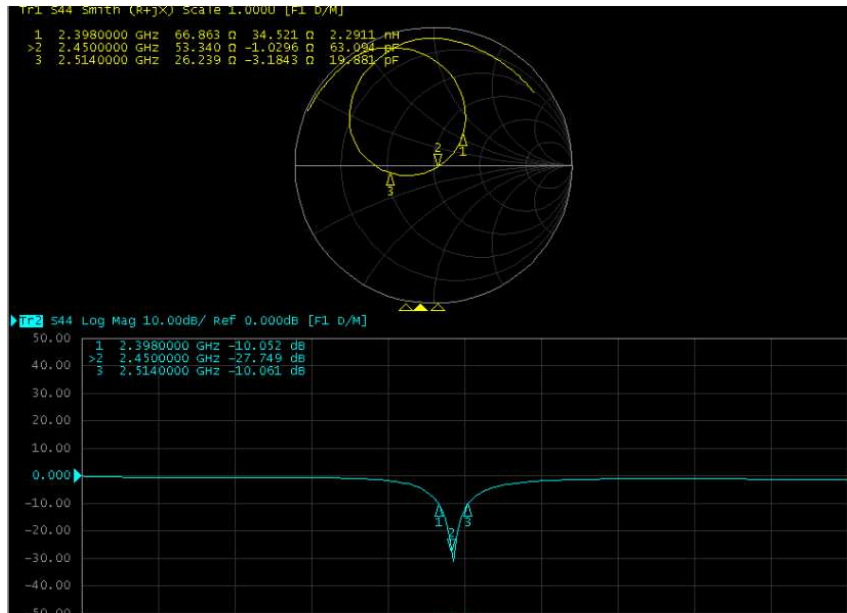

SWRU326-005

Figure 2-5. Return Loss from the ACX Antenna and Matching Circuit


XY plane

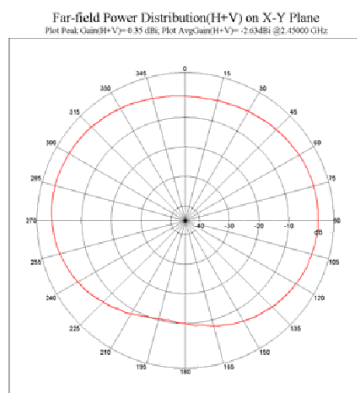

Unit : dBi


	Peak gain	Avg. gain
XY plane	0.3	-2.6

XZ plane

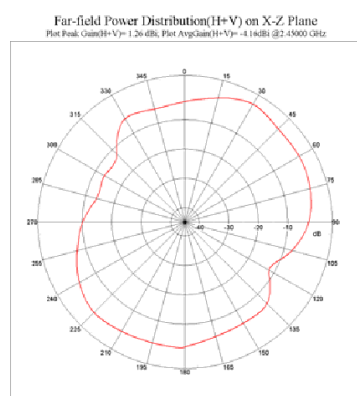

	Peak gain	Avg. gain
XZ plane	1.3	-4.2

YZ plane

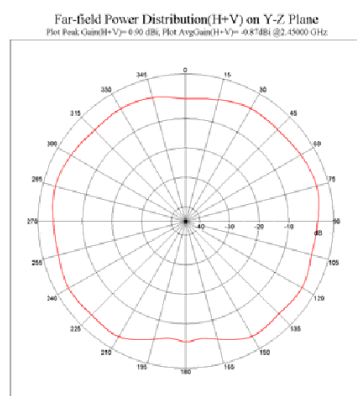


	Peak gain	Avg. gain
YZ plane	0.9	-0.9

SWRU326-006

Figure 2-6. Antenna Radiation Patterns

2.4 Hardware Setup

Before conducting performance tests, the EM board must be connected to the host platform, either with the mating connectors (J6 and J7) or the single-row headers (J4 and J5). To use the EM mating connectors to connect the hardware, the mating EM connector must be lined up and spaced 1.2 inches apart (see [Figure 2-7](#)). To use the single-row headers, the required signals from the EM mating connectors must be wired to the host platform.

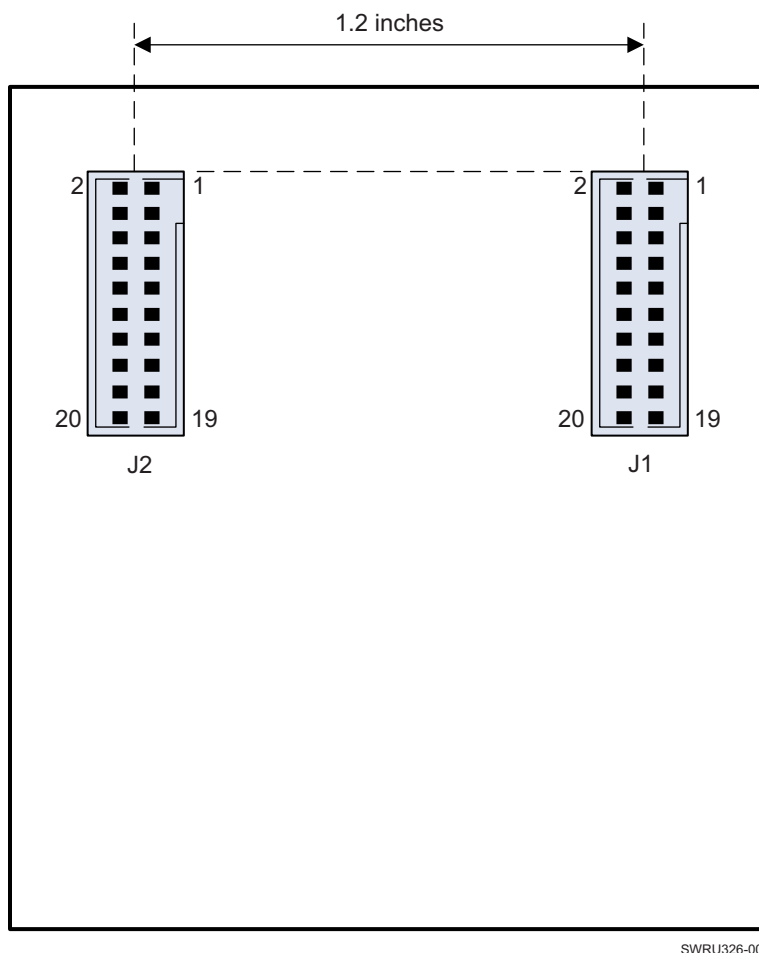

SWRU326-007

Figure 2-7. Host PCB Mating Connector Arrangement

Figure 2-8 shows the schematics of the CC3000 EM board.

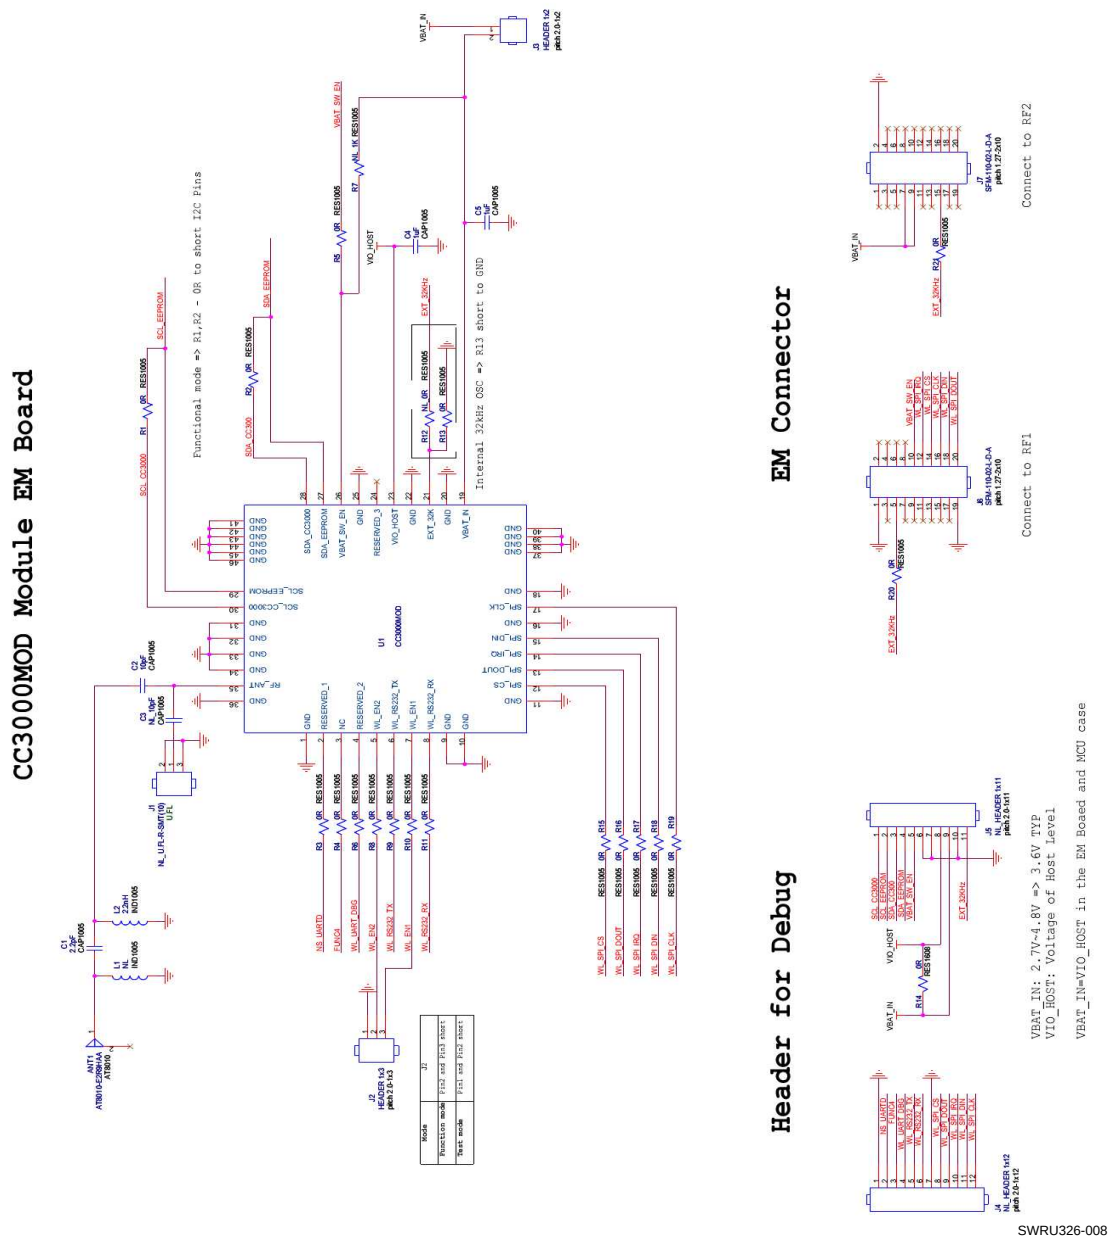


Figure 2-8. Schematics of the CC3000 EM Board

2.6 Bill of Materials (BOM)

[Table 2-7](#) lists the BOM for the TI CC3000 EM board.


Table 2-7. BOM for the TI CC3000 EM Board

Items	Reference Designator	Description
1	U1	TI CC3000 Wi-Fi b/g module (BM)
2	ANT1	ANT, 2.4 GHz, peak gain 2.5 dB
3	J1	Mini RF header receptacle
4	J2	CON male 1 x 3, pitch 2.0 mm
5	J3	CON male 1 x 2, pitch 2.0 mm
6	J6,J7	Female header, Fool Proof H:4.3, 2 x 10, pitch 1.27 mm, SMT
7	C1,C3	CAP 0402 10 pF, 50 V, NPO, $\pm 5\%$
8	C4,C5	CAP 0402 1 μ F, X5R, 6.3 V, $\pm 10\%$, HF
9	R1, R2, R3, R4, R5, R6, R8, R9, R10, R11, R13, R15, R16, R17, R18, R19, R20, R21	RES 0402, 0- Ω jumper
10	R14	RES 0603, 0- Ω jumper

Layout Guidelines

This section presents guidelines that must be followed when creating a board design incorporating the TI CC3000 module.

Figure 3-1 shows the TI CC3000 EM four-layer board. Table 3-1 and Figure 3-2 describe instances of good layout practices.

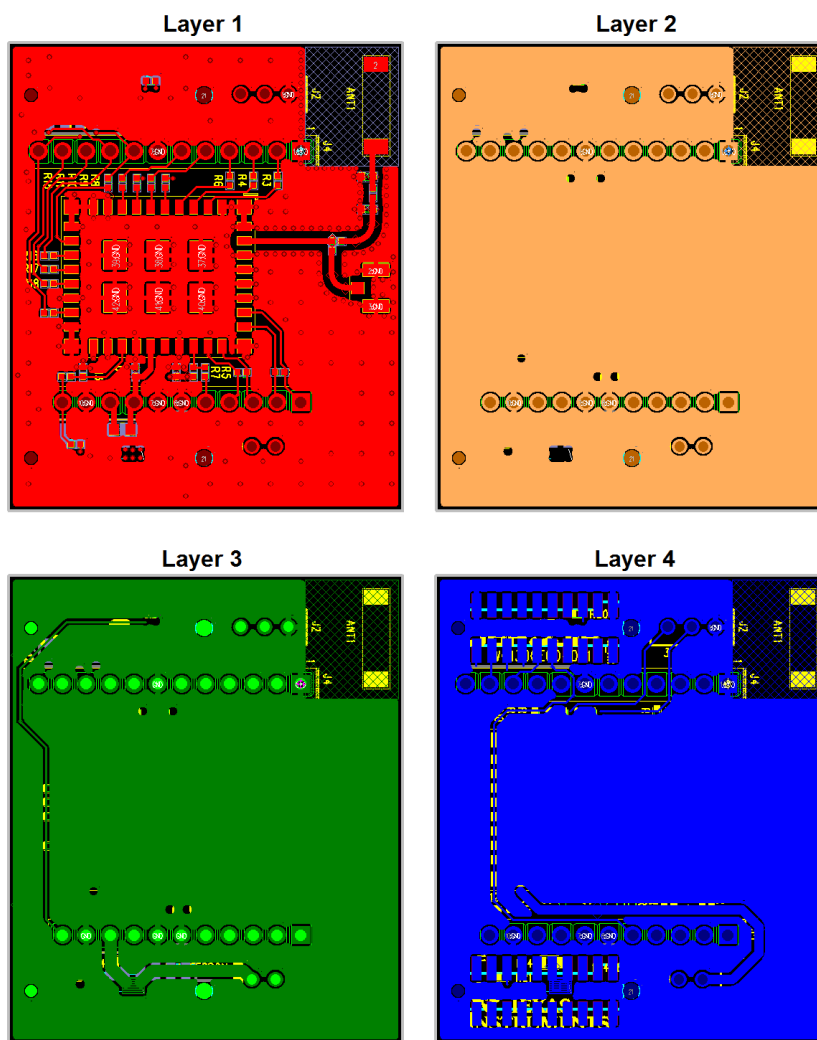


SWRU326-014

Figure 3-1. Module Layout Guidelines

Table 3-1. Module Layout Guidelines

Reference ⁽¹⁾	Guideline Description
1	The proximity of ground vias must be close to the pad.
2	Signal traces must not be run underneath the module on the layer where the module is mounted.
3	Have a complete ground pour in layer 2 for thermal dissipation.
4	Have a solid ground plane and ground vias under the module for stable system and thermal dissipation.
5	Increase the ground pour in the first layer and have all of the traces from the first layer on the inner layers, if possible.
6	Signal traces can be run on a third layer under the solid ground layer, which is below the module mounting layer.


⁽¹⁾ See Figure 3-2.

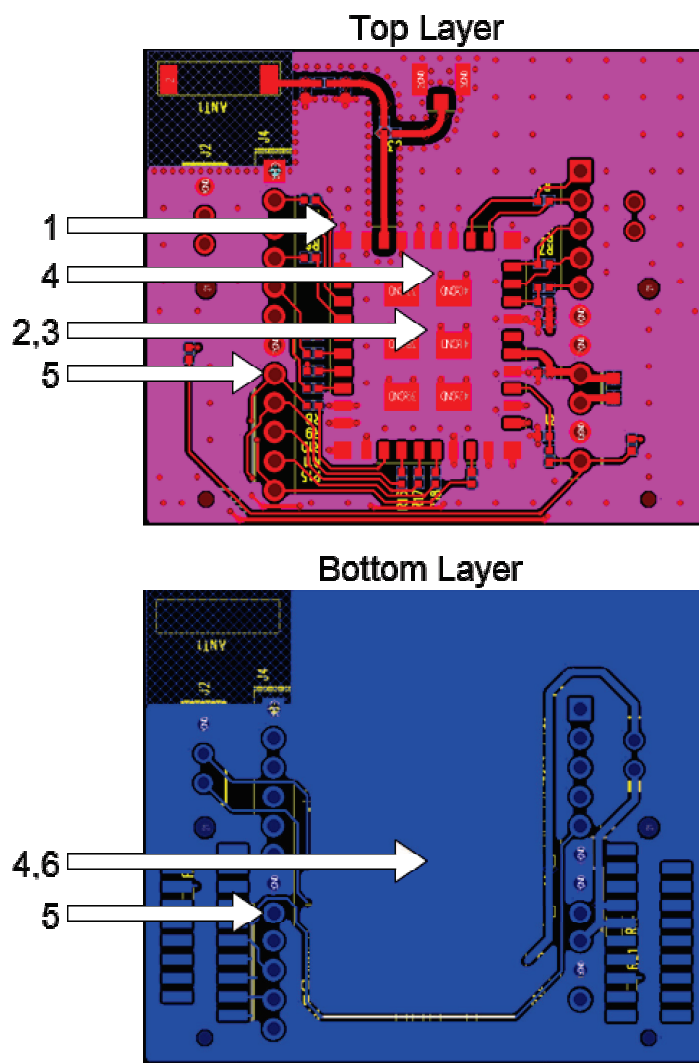

SWRU326-013

Figure 3-2. Module Layout Guidelines

Figure 3-3 shows the trace design for the PCB. A 50-Ω impedance match on the trace to the antenna should be used. Also, 50-Ω traces are recommended for the PCB layout. Table 3-2 lists the distances shown in Figure 3-3. Figure 3-4 shows layer 1 with the trace to the antenna over ground layer 2. Table 3-3 and Figure 3-5 describe instances of good layout practices for the antenna and RF trace routing.



SWRU326-015

Table 3-2. Trace Design Measurement Values

Measurement	Length
H (height between L1 and L2)	12.0 mil
W (RF trace)	14.3 mil
T (thickness)	1.2 mil
S (separation)	10.0 mil
ϵ_r (dielectric)	4.3

Table 3-3. Antenna and RF Trace Routing Layout Guidelines

Reference ⁽¹⁾	Guideline Description
1	The RF trace antenna feed must be as short as possible beyond the ground reference. At this point, the trace starts to radiate.
2	The RF trace bends must be gradual with an approximate maximum bend of 45 degrees with trace mitered. RF traces must not have sharp corners.
3	RF traces must have via stitching on the ground plane beside the RF trace on both sides.
4	RF traces must have constant impedance (microstrip transmission line).
5	For best results, the RF trace ground layer must be the ground layer immediately below the RF trace. The ground layer must be solid.
6	There must be no traces or ground under the antenna section.
7	The PCB designer must understand the microstrip model used and the scale line width according to the microstrip model.
8	RF traces must be as short as possible. The antenna, RF traces, and modules must be on the edge of the PCB product. The proximity of the antenna to the enclosure and the enclosure material must also be considered.

⁽¹⁾ See Figure 3-5.


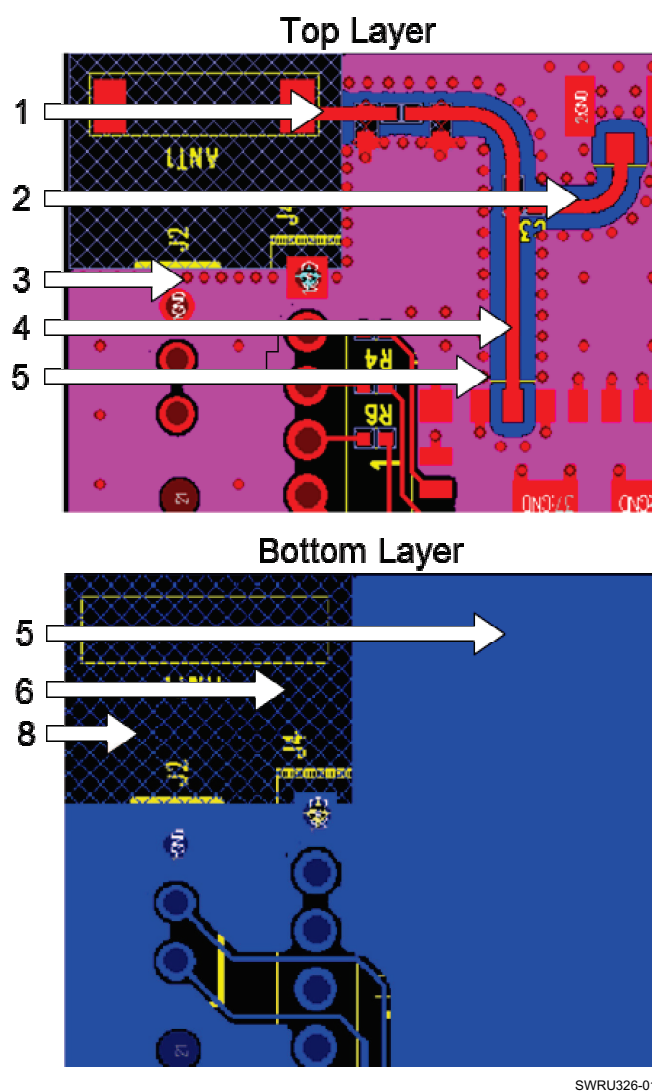


Figure 3-5. Antenna and RF Trace Routing Layout Guidelines

Figure 3-6 shows the supply routing guidelines:

- For power supply routing, the power trace for VBAT must be at least 40 mil wide.
- The 1.8-V trace must be at least 18 mil wide.
- Make VBAT traces as wide as possible to ensure reduced inductance and trace resistance.
- If possible, shield VBAT traces with ground above, below, and beside the traces.

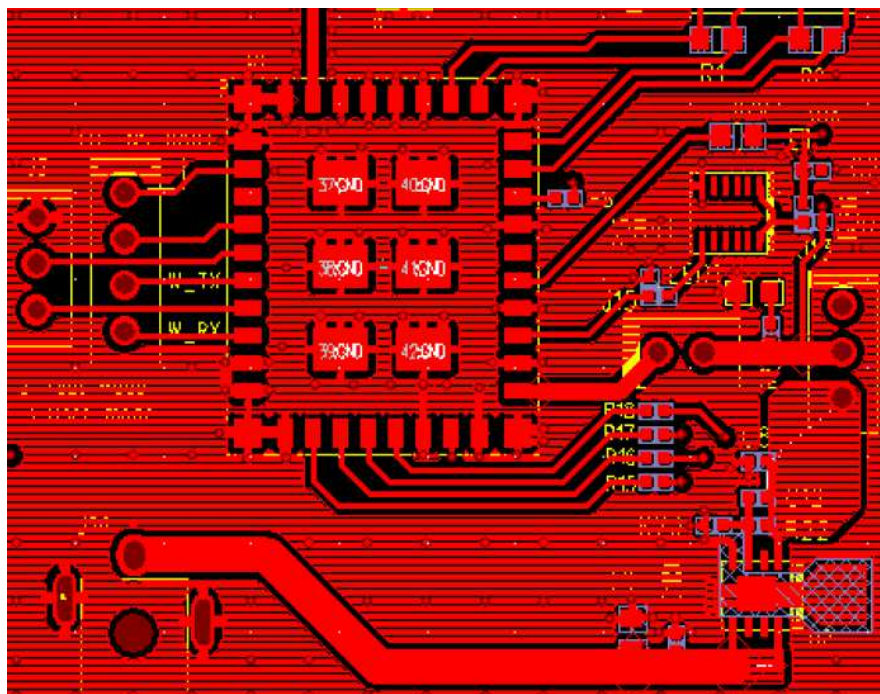

SWRU326-012

Figure 3-6. Power Supply Routing of the CC3000 EM Board

Application Development

TI supports the CC3000 EM board when paired with the following TI MCU host platforms:

- MSP-EXP430FR5739
- MSP-EXP430F5529
- MSP-EXP430F5438
- MSP-EXP430FG4618
- DK-LM3S9B96
- EK-LM4F232

To find example applications for each of the listed host platforms, go to the TI wiki at:
http://processors.wiki.ti.com/index.php/CC3000_Wi-Fi_for_MCU#TI_Platforms.

In addition to the TI MCU platforms, the CC3000 EM board can be used on other platforms with the same RF connector interface. For a host driver porting guide to assist with porting to other platforms, go to http://processors.wiki.ti.com/index.php/CC3000_Host_Driver_Porting_Guide.

Figure 4-1 shows the MSP-EXP430FR5739 test platform and CC3000 EM board.

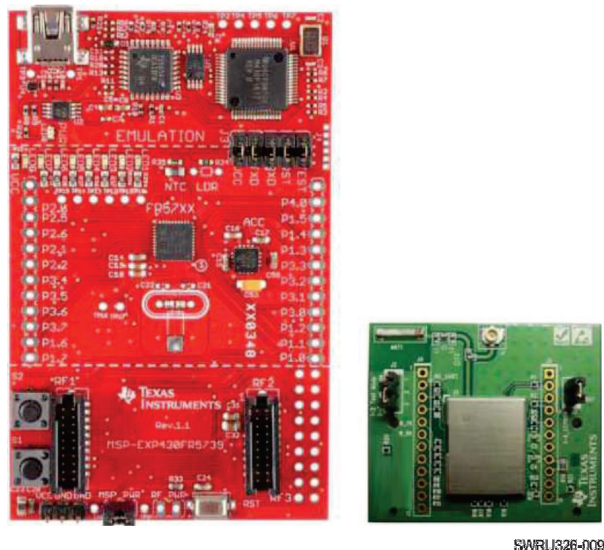


Figure 4-1. MSP-EXP430FR5739 Test Platform and CC3000 EM Board

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46, latest issue, and to discontinue any product or service per JESD48, latest issue. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products (also referred to herein as "components") are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its components to the specifications applicable at the time of sale, in accordance with the warranty in TI's terms and conditions of sale of semiconductor products. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by applicable law, testing of all parameters of each component is not necessarily performed.

TI assumes no liability for applications assistance or the design of Buyers' products. Buyers are responsible for their products and applications using TI components. To minimize the risks associated with Buyers' products and applications, Buyers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI components or services are used. Information published by TI regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of significant portions of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI components or services with statements different from or beyond the parameters stated by TI for that component or service voids all express and any implied warranties for the associated TI component or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Buyer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of TI components in its applications, notwithstanding any applications-related information or support that may be provided by TI. Buyer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Buyer will fully indemnify TI and its representatives against any damages arising out of the use of any TI components in safety-critical applications.

In some cases, TI components may be promoted specifically to facilitate safety-related applications. With such components, TI's goal is to help enable customers to design and create their own end-product solutions that meet applicable functional safety standards and requirements. Nonetheless, such components are subject to these terms.

No TI components are authorized for use in FDA Class III (or similar life-critical medical equipment) unless authorized officers of the parties have executed a special agreement specifically governing such use.

Only those TI components which TI has specifically designated as military grade or "enhanced plastic" are designed and intended for use in military/aerospace applications or environments. Buyer acknowledges and agrees that any military or aerospace use of TI components which have **not** been so designated is solely at the Buyer's risk, and that Buyer is solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI has specifically designated certain components which meet ISO/TS16949 requirements, mainly for automotive use. Components which have not been so designated are neither designed nor intended for automotive use; and TI will not be responsible for any failure of such components to meet such requirements.

Products

Audio	www.ti.com/audio
Amplifiers	amplifier.ti.com
Data Converters	dataconverter.ti.com
DLP® Products	www.dlp.com
DSP	dsp.ti.com
Clocks and Timers	www.ti.com/clocks
Interface	interface.ti.com
Logic	logic.ti.com
Power Mgmt	power.ti.com
Microcontrollers	microcontroller.ti.com
RFID	www.ti-rfid.com
OMAP Applications Processors	www.ti.com/omap
Wireless Connectivity	www.ti.com/wirelessconnectivity

Applications

Automotive and Transportation	www.ti.com/automotive
Communications and Telecom	www.ti.com/communications
Computers and Peripherals	www.ti.com/computers
Consumer Electronics	www.ti.com/consumer-apps
Energy and Lighting	www.ti.com/energy
Industrial	www.ti.com/industrial
Medical	www.ti.com/medical
Security	www.ti.com/security
Space, Avionics and Defense	www.ti.com/space-avionics-defense
Video and Imaging	www.ti.com/video

TI E2E Community

e2e.ti.com