

CCLHM080
THRU
CCLHM150

SURFACE MOUNT
HIGH CURRENT SILICON
CURRENT LIMITING DIODE



SOD-80 CASE



www.centrasemi.com

DESCRIPTION:

The CENTRAL SEMICONDUCTOR CCLHM080 series types are high current silicon field effect current regulator diodes designed for applications requiring a constant current over a wide voltage range. These devices are manufactured in the cost effective SOD-80 double plug case which provides many benefits to the user including space saving and improved thermal characteristics. Special selections of I_P (regulator current) are available for critical applications.

MARKING CODE: SEE MARKING CODE TABLE ON FOLLOWING PAGE

FEATURES:

- Low Cost
- High Reliability
- Smaller Case Size than Competition
- Special Selections Available
- Superior Lot to Lot Consistency
- Leaded Devices Available

MAXIMUM RATINGS: ($T_L=75^\circ\text{C}$)

Peak Operating Voltage

Power Dissipation

Operating and Storage Junction Temperature

SYMBOL

P_{OV}

P_D

T_J, T_{stg}

50

800

-65 to +200

UNITS

V

mW

$^\circ\text{C}$

ELECTRICAL CHARACTERISTICS: ($T_A=25^\circ\text{C}$ unless otherwise noted)

Type	Regulator Current (Note 1)			Minimum Dynamic Impedance	Minimum Knee Impedance	Maximum Limiting Voltage	Temperature Coefficient (Note 2)
	$I_P @ V_T=25\text{V}$			$Z_T @ V_T=25\text{V}$	$Z_K @ V_K=6.0\text{V}$	$V_L @ I_L=0.8 \times I_P \text{ MIN}$	TC
	MIN (mA)	NOM (mA)	MAX (mA)	$\text{M}\Omega$	k Ω	V	$\%/^\circ\text{C}$
CCLHM080	6.56	8.2	9.84	0.32	15	3.1	-0.25 to -0.45
CCLHM100	8.0	10.0	12.0	0.17	6.0	3.5	-0.25 to -0.45
CCLHM120	9.6	12.0	14.4	0.08	3.0	3.8	-0.25 to -0.45
CCLHM150	12.0	15.0	18.0	0.03	2.0	4.3	-0.25 to -0.45

Notes:

1) Pulsed Method: Pulse Width (ms) = 27.5 divided by $I_P \text{ NOM (mA)}$

2) The Temperature Coefficient is measured between + 25 $^\circ\text{C}$ and +50 $^\circ\text{C}$.


R6 (4-January 2010)

CCLHM080
THRU
CCLHM150

SURFACE MOUNT
HIGH CURRENT SILICON
CURRENT LIMITING DIODE



SOD-80 CASE - MECHANICAL OUTLINE

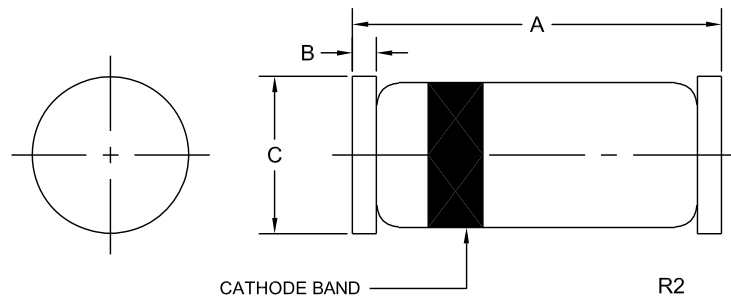

DIMENSIONS				
SYMBOL	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.130	0.146	3.30	3.71
B	0.014		0.35	
C (DIA)	0.049	0.067	1.25	1.70

SOD-80 (REV:R2)

MARKING CODES			
TYPE	BAND 1*	BAND 2	BAND 3
CCLHM080	BLACK	GREEN	YELLOW
CCLHM100	BLACK	ORANGE	PINK
CCLHM120	BLACK	ORANGE	WHITE
CCLHM150	BLACK	ORANGE	LIGHT BLUE

* Cathode Band

R6 (4-January 2010)