

Features

- ID1 full size card acceptance
- Card detection sealed switch
- Compatible with pick and place and lead free soldering

Typical Applications

- Transaction
- POS
- Identification



Mechanical

Number of contacts	6 or 8
Mechanical life	50,000 cycles
Card insertion force	10N max
Card extraction force	1N min / 10N max
Contact force	0,4N to 0,7N
Card detection switch	0,8 N max for actuation (end travel switch actuation force actuates when card is 0,9mm from card stop) 1,8 N max for complete depression
Vibration Frequency	10 to 500 Hz. Acceleration 50m/s ² Duration 6 hours - amplitude 0,35mm
Shock	Peak value 500 m/s ² – Duration 11 ms 3 shocks in each direction of each axis
Max elect. discontinuity	1μs

Packaging

See table below

Soldering Process

Compatible with lead free SMT reflow soldering process

Contact Electrical Data

Insulation resistance	1000 MΩ min
Contact resistance max	100 mΩ max
Switching current	10 μA min / 1 A max
Dielectric strength	750 Vrms min

Switch Electrical Data

Card detection switch	Normally open
Rc card detection switch	100 mΩ max
Dielectric strength	250 Vrms min
Switch current rating	1 mA min / 10 mA max
Maximum switch power	0.2 VA

Environmental Data

Operating temperature	-40°C to +85°C
Salt mist	IEC 512 test number 11f (96 hours)
Damp heat	IEC 512 test number 11c (10 days)
Card detection switch	Sealed against dust
RoHS compliant	

Designation	Housing Type	# of Contacts	Contact Force	Total Height (mm)	Total Dim. (mm)	Packaging
CCM04-5427LFT	standard	8	0,4N to 0,7N	2,65	18,75 X 25	reels of 1,000 pcs
CCM04-5436LFT	standard	8	0,4N to 0,7N	0,90	18,75 X 26,9	reels of 1,000 pcs
CCM04-5468LFT	stand-off	8	0,4N to 0,7N	3,5	18,75 X 24	reels of 1,000 pcs
CCM04-5454LFT	standard	8	0,4N to 0,7N	0,90	18,75 X 26,9	reels of 1,000 pcs
CCM04-5455LFT	standard	8	0,4N to 0,7N	0,90	18,75 X 26,9	reels of 1,000 pcs
CCM04-5452LFT	stand-off	6	0,4N to 0,7N	4,25	18,75 X 24	reels of 1,000 pcs
CCM04-5202LFT	standard	8	0,35N to 0,65N	2,32	16,1 X 26,5	reels of 1,000 pcs



Full Size

[illegible]

Technical drawing of a terminal block layout showing dimensions and component locations. The drawing includes a grid with dimensions in millimeters (mm).


Dimensions:

- Vertical dimensions (from top to bottom): 1.3, 2.54, 2.54, 2.54, 3, 4.
- Horizontal dimensions (from left to right): 13.2, 1.3, 9.2, 1.7.
- Horizontal dimensions (from left to right, below the grid): 3.81, 3.81, 2.79, 15.15, 9.5.
- Vertical dimensions (from bottom to top, on the right side): 0.2, 2x, 11.

Components and Labels:



- Contacts:** C5, C6, C7, C8 (on the left); C1, C2, C3, C4 (on the right).
- Switches:** SW (two locations on the right).
- Stand-off area:** Indicated by a dashed line and label.
- Plastic outline:** Indicated by a dashed line and label.
- Contact foot area:** 0,8 x 0,7 (bottom left).
- Switch contact foot area:** 0,85 x 0,7 (bottom right).
- Pad:** Indicated by a label and arrow pointing to the bottom left corner.
- 8x 0.2:** Dimension for the switch contact foot area.
- 2x 0.2:** Dimension for the switch contact foot area.
- 11:** Dimension for the switch contact foot area.

ISO/IEC 7816-2: Contact location according to ISO/IEC 7816-2.



Full Size


CCM04-5436 LFT

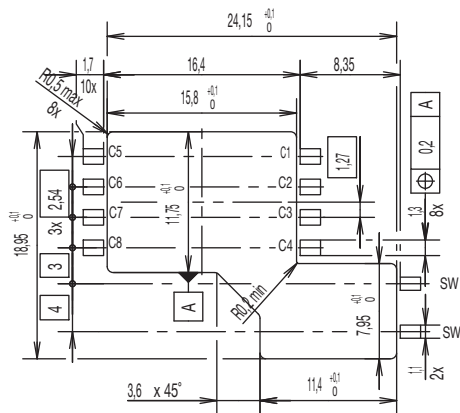


www.ck-components.com

Full Size

CCM04-5468 LFT

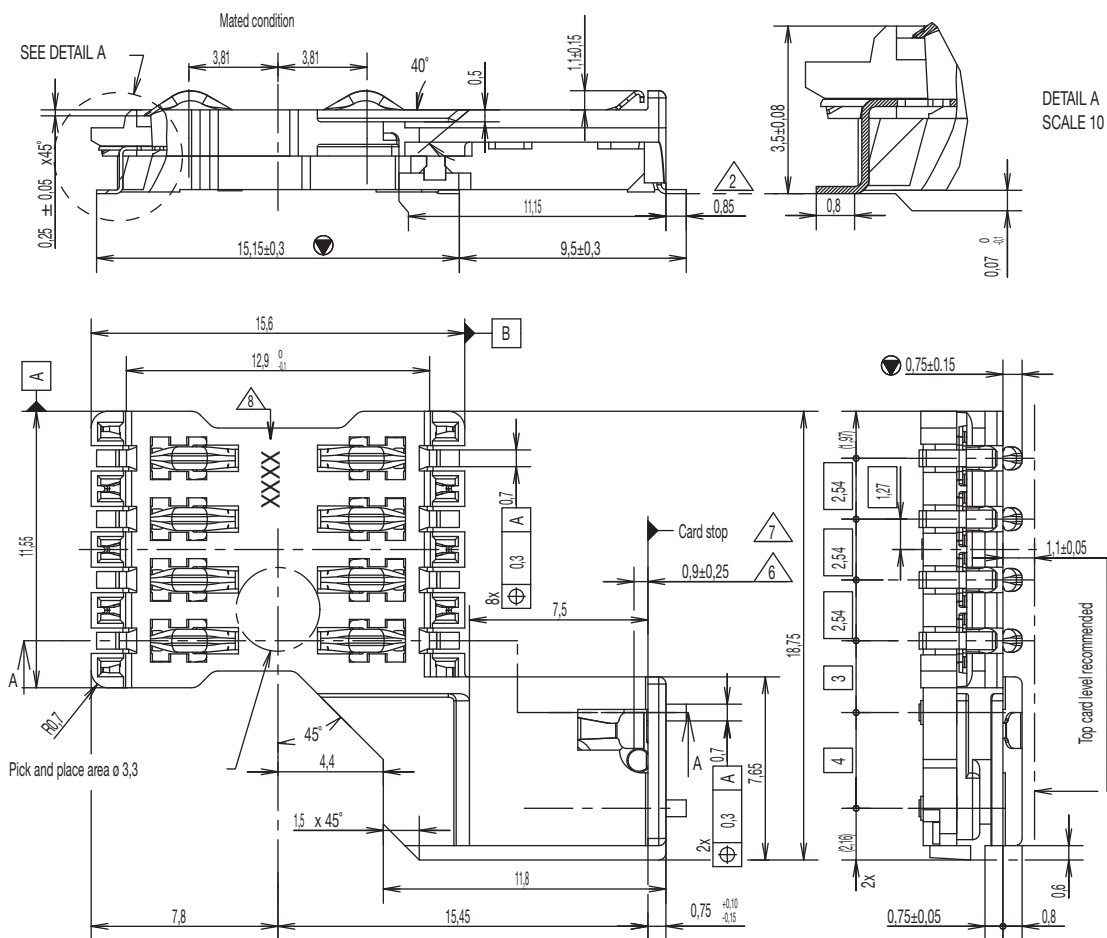

RECOMMENDED PC BOARD LAYOUT
(Component side)

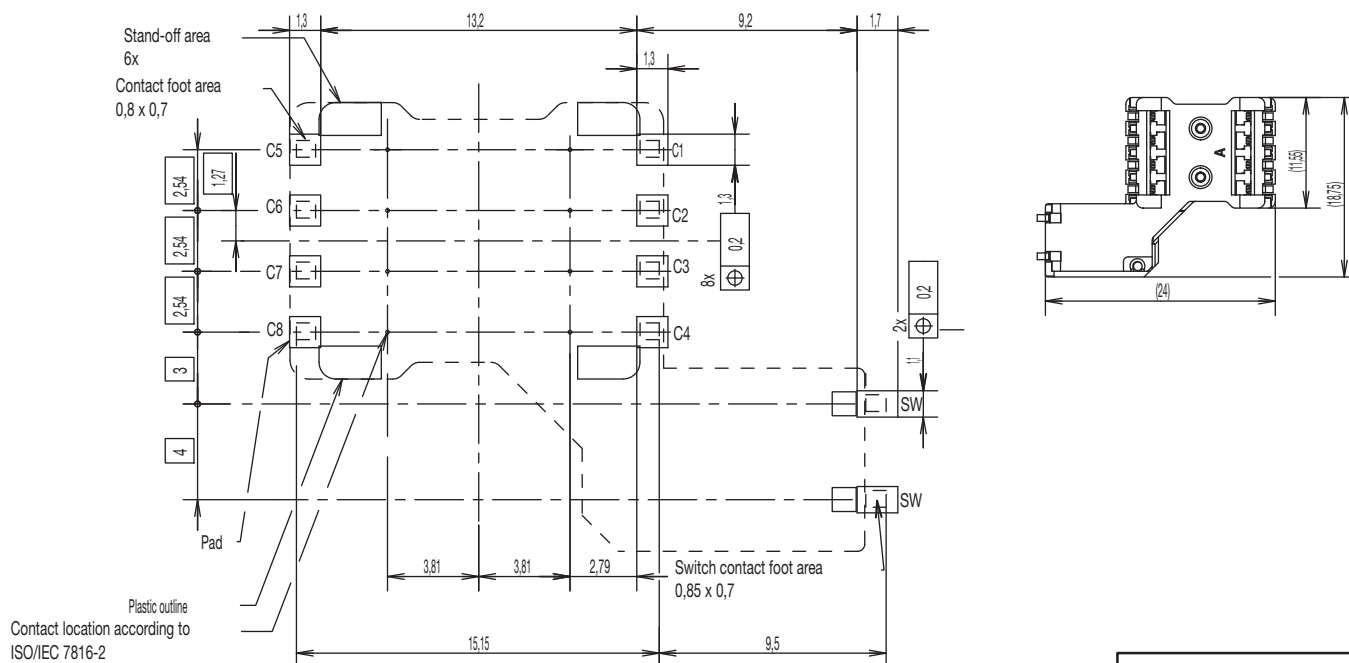


Dimensions are shown in mm
Specifications and dimensions subject to change

www.ck-components.com

Full Size



CCM04-5454 LFT

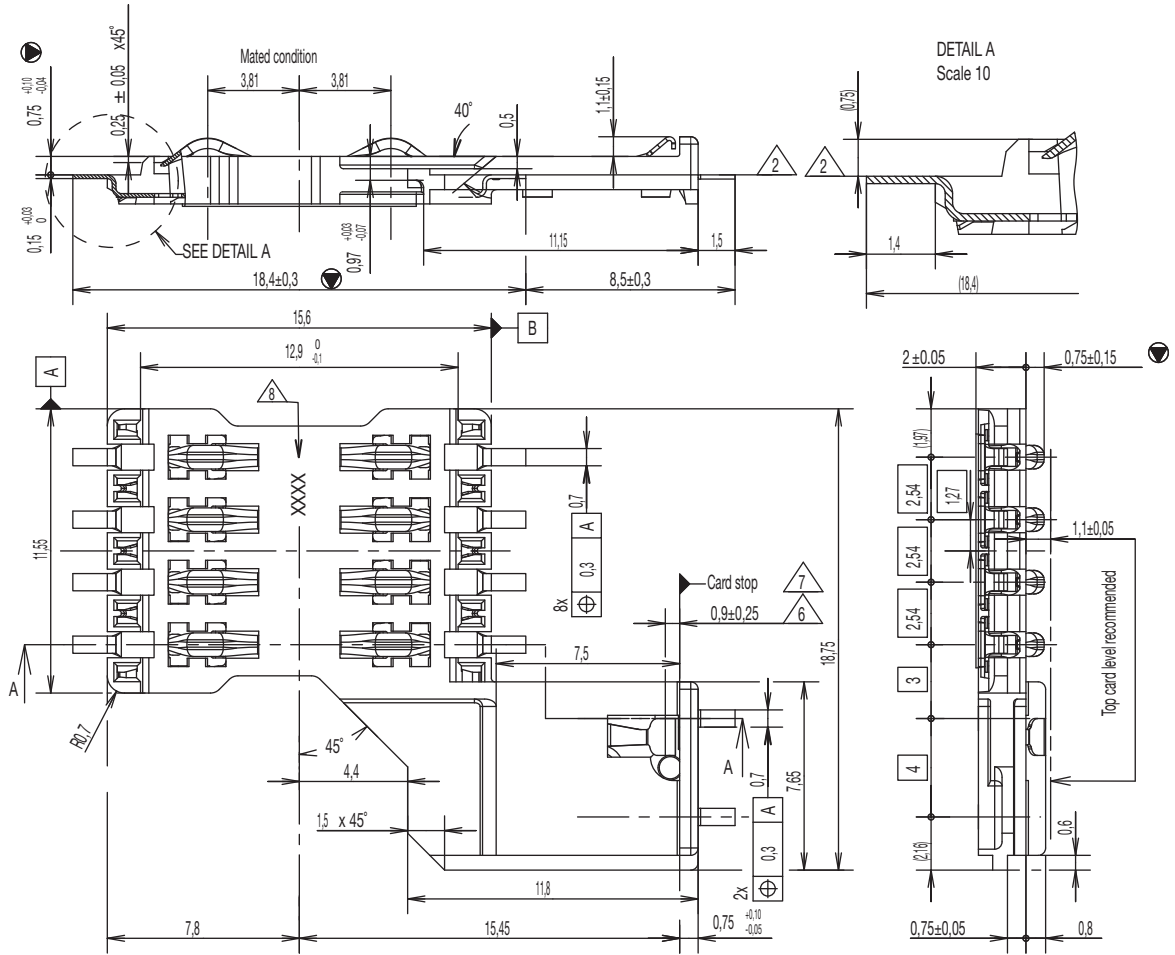

RECOMMENDED PC BOARD LAYOUT (Component side)

Scale 2,5

Scale


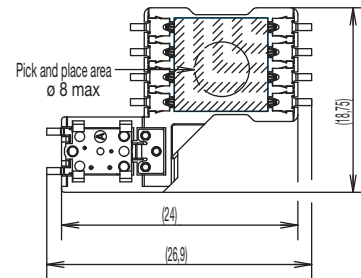
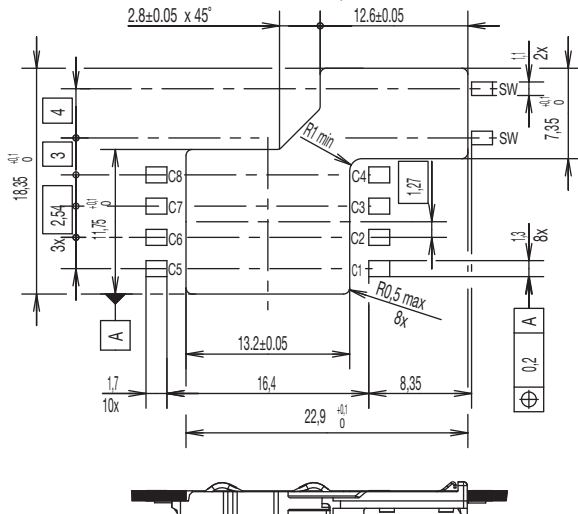


Dimensions are shown in mm
Specifications and dimensions subject to change

www.ck-components.com


Full Size

CCM04-5455 LFT



Full Size

CCM04-5452 LFT

[illegible]

First Angle Projection

www.ck-components.com

Full Size

[illegible]

www.ck-components.com