


Part	L	Tol	R _{DC}	I _{DC}
	(μH)	%	MAX	I _N
			(Ω)	(A)
CD43-1R0	1.0 @7.96 MHz	M	48.70m	2.6
CD43-1R4	1.5 @7.96 MHz	M	56.20m	2.5
CD43-1R8	1.8 @7.96 MHz	M	63.70m	2
CD43-2R2	2.2 @7.96 MHz	M	71.20m	1.8
CD43-2R7	2.7 @7.96 MHz	M	78.70m	1.6
CD43-3R3	3.3 @7.96 MHz	M	86.20m	1.4
CD43-3R9	3.9 @7.96 MHz	M	93.70m	1.3
CD43-4R7	4.7 @7.96 MHz	M	108.70m	1.2
CD43-5R6	5.6 @7.96 MHz	M	125.70m	1
CD43-6R8	6.8 @7.96 MHz	M	131.20m	1
CD43-8R2	8.2 @7.96 MHz	M	146.20m	0.8
CD43-100	10 @2.52 MHz	M	0.182	1
CD43-120	12 @2.52 MHz	M	0.21	1
CD43-150	15 @2.52 MHz	M	0.235	0.9
CD43-220	22 @2.52 MHz	M	0.378	0.7
CD43-270	27 @2.52 MHz	M	0.522	0.6
CD43-330	33 @2.52 MHz	K	0.54	0.6
CD43-390	39 @2.52 MHz	K	0.587	0.5
CD43-470	47 @2.52 MHz	K	0.844	0.4
CD43-560	56 @2.52 MHz	K	0.937	0.4
CD43-680	68 @2.52 MHz	K	1.117	0.4

SPECIFICATION

TYPE	= CD43
CONSTRUCTION	= SURFACE MOUNT POWER INDUCTOR
TERMINAL COATING	= NICKEL
OPERATING TEMP.	= -40 TO +85 °C
STORAGE TEMP	= -55 TO +125 °C
INSULATION RESISTANCE	= 100MOhm. 100V TERMINAL-CORE
DIELECTRIC STRENGTH	= 250Vac TERMINAL-CORE
HUMIDITY EFFECTS	= L±5 @ 95%RH, 40 °C, 1HR
	Q±5 @ 95%RH, 40 °C, 1HR
PACKAGING	= 2000PCS/REEL
MARKING	= 3 CHARACTERS, VALUE

NOTE

TOLERANCES K=10%; M=20%.

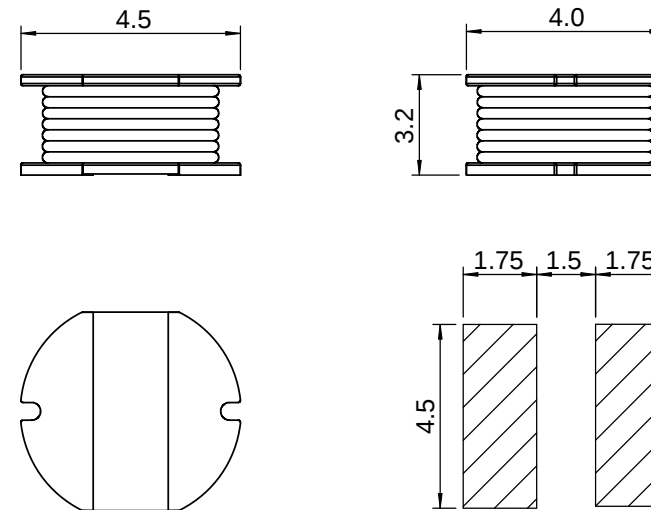

PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF AIT COMPONENTS LTD ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF AIT COMPONENTS LTD IS STRICTLY PROHIBITED.		NAME	DATE	AIT COMPONENTS LTD www.aitcomponents.com	
	DRAWN				
	CHECKED			TITLE: CD43 SMD POWER INDUCTOR	
	ENG APPR.				
MATERIAL	--	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS TOLERANCES: ONE PLACE DECIMAL +/-0.3 TWO PLACE DECIMAL +/-0.13 ANGLE +/-1 DEGREE			SIZE A
FINISH	--	DO NOT SCALE DRAWING			DWG. NO. CD43 SMD INDUCTOR REV. 00
SCALE:1:1				SHEET 1 OF 1	