HARRIS SEMICONDUCTOR

CD54AC157/3A

COMPLETE DATA SHEET COMING SOON!

June 1997


Quad 2-Input Multiplexer Non-Inverting

Description

The CD54AC157/3A is a quad 2-input multiplexer that utilizes the Harris Advanced CMOS Logic technology.

The CD54AC157/3A is supplied in 16 lead dual-in-line ceramic packages (F suffix).

Functional Diagram

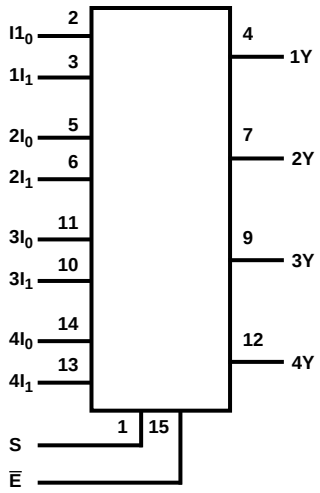

Absolute Maximum Ratings

DC Supply Voltage, V_{CC} . . . . . -0.5V to +6V
DC Input Diode Current, I_{IK}
For V_I < -0.5V or V_I > V_{CC} + 0.5V . . . . . ±20mA
DC Output Diode Current, I_{OK}
For V_O < -0.5V or V_O > V_{CC} + 0.5V . . . . . ±50mA
DC Output Source or Sink Current, Per Output Pin, I_O
For V_O > -0.5V or V_O < V_{CC} + 0.5V . . . . . ±50mA
DC V_{CC} or GND Current, I_{CC} or I_{GND}
For Up to 4 Outputs Per Device, Add ±25mA For Each Additional Output . . . . . ±100mA

Power Dissipation Per Package, P_D
T_A = -55°C to +100°C (Package F) 500mW
T_A = +100°C to +125°C (Package F) . . . . . Derate Linearly at 8mW/°C to 300mW
Operating Temperature Range, T_A
Package Type F . . . . . -55°C to +125°C
Storage Temperature, T_{STG} . . . . . -65°C to +150°C
Lead Temperature (During Soldering)
At Distance 1/16in. ± 1/32in. (1.59mm ± 0.79mm)
From Case For 10s Max . . . . . +265°C
Unit Inserted Into a PC Board (Min Thickness 1/16in., 1.59mm)
With Solder Contacting Lead Tips Only . . . . . +300°C

CAUTION: Stresses above those listed in "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress only rating and operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied.

Recommended Operating Conditions

Supply Voltage Range, V_{CC}
Unless Otherwise Specified, All Voltages Referenced to GND
T_A = Full Package Temperature Range
CD54AC Types . . . . . 1.5V to 5.5V
CD54ACT Types . . . . . 4.5V to 5.5V
DC Input or Output Voltage, V_I, V_O . . . . . 0V to V_{CC}

Operating Temperature, T_A . . . . . -55°C to +125°C
Input Rise and Fall Slew Rate, dt/dv
at 1.5V to 3V (AC Types) . . . . . 0ns/V to 50ns/V
at 3.6V to 5.5V (AC Types) . . . . . 0ns/V to 20ns/V
at 4.5V to 5.5V (AC Types) . . . . . 0ns/V to 10ns/V

CAUTION: These devices are sensitive to electrostatic discharge. Users should follow proper I.C. Handling Procedures.

Copyright © Harris Corporation 1994

File Number **3891**