


Rev	AWO #	Description	Date	Appr
-		RELEASED	2/15/11	

APPROVED: _____

DATE: _____ TITLE: _____

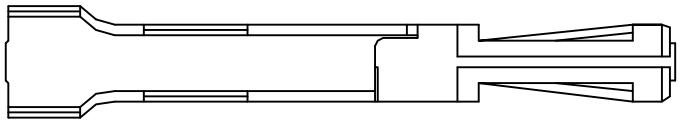

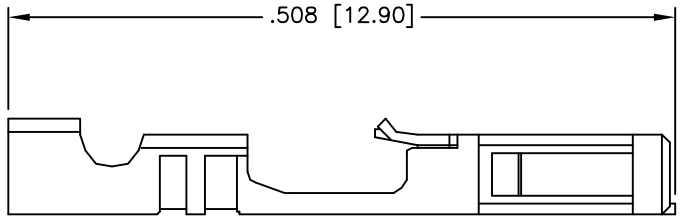



SPECIFICATIONS:
Material:
Contact: Phosphor Bronze
Plating:
Matte Tin over Copper underplate on tails
Electrical:
Operating voltage: 250 VAC max
Current rating: 3 Amps max
Contact resistance: 30 mohms max
Dielectric withstanding voltage: 500 VAC for 1 minute
Mechanical:
Recommended Wire Range: 24 to 28 Awg
Recommended Insulation Thickness: O.D. .063" [1.60mm] Max.
Temperature Rating:
Operating temperature: −40°C to +105°C
Packaging:
R = Chain on reel (15,000 pcs / Reel)
Environmental:
Lead free, RoHS compliant RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	AY	2/15/11
CHECKED	JL	2/15/11
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE
CRIMP CONTACT, MATTE TIN PLATED

SIZE	PART NO.	REV.
X	CDH-C-MT-R	-

REF:	SCALE:	SHEET
S00016T	NTS	1 OF 1