EVERLIGHT ELECTRONICS CO.,LTD.

DATA SHEET

PART NO. : 3294-15UBGC/S400-A6

DATE : 2004/10/20

DEPARTMENT : CHR&D1

REVISION : 1

RECEIVED			
■ MASS PRODUCTION			
☐ PRELIMINARY			
☐ CUSTOMER DESIGN			
DEVICE NUMBER :	CDLE-329-019 ~~339-147~~		
PAGE :	6		
CUSTOMER	DESIGNER	CHECKER	APPROVER
	恒光工程 2004.10.21. 蔡剛		恒光工程 2004-11-2. 蔡登位

REV.	DESCRIPTION	RELEASE DATE

OFFICE: 7C BUILDING, LIAN HUA PORT INDUSTRIAL DISTRICT, LIAN HUA SHAN
BONDED PRICESSING ZONE PAN YU, GUANG ZHU, CHINA
TEL. : (020)84860913,84860914
FAX : (020)84860600
http : //www.everlight.com

EVERLIGHT

Technical Data Sheet
3.0mm Round Type LED Lamps

3294-15UBGC/S400-A6



■ Features :

- Choice of various viewing angles
- Available on tape and reel.
- Reliable and robust
- Pb free

■ Descriptions :

- The series is specially designed for applications requiring higher brightness
- The led lamps are available with different colors, intensities.

■ Applications :

- TV set
- Monitor
- Telephone
- Computer

PART NO.	Material	Emitted Color	Lens Color
3294-15UBGC/S400-A6	InGaN/SiC	Super Blue	Water Clear

Technical Data Sheet

3.0mm Round Type LED Lamps

3294-15UBGC/S400-A6

Package Dimensions

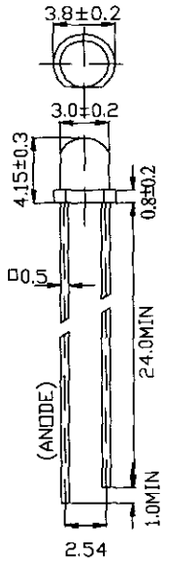

Notes: 1.All dimensions are in millimetres

2. The height of flange must be less than 1.5mm(0.059").
3. Without special declared,the tolerance is ±0.25mm.

■ Absolute Maximum Ratings at Ta = 25℃

Parameter	Symbol	Rating	Unit
Forward Current	I_F	25	mA
Operating Temperature	Topr	-40 to +85	℃
Storage Temperature	Tstg	-40 to +100	℃
Electrostatic Discharge	ESD	1000	V
Soldering Temperature	Tsol	260 ± 5	℃
Power Dissipation	Pd	120	mW
Peak Forward Current	I_F(Peak)	100	mA
Reverse Voltage	V_R	5	V

Note: *1:I_{FP} Conditions --Pulse Width ≦ 1msec and Duty ≦ 1/10.

*2:Soldering time ≦ 5 seconds.

Technical Data Sheet

3.0mm Round Type LED Lamps

3294-15UBGC/S400-A6

Electro-Optical Characteristics (Ta=25℃)

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Forward Voltage	V_F	IF= 20 mA	/	3.5	4.3	V
Reverse Current	I_R	V_R= 5 V	/	/	50	μA
Luminous Intensity	Iv	IF= 20 mA	400	800	/	mcd
Viewing Angle	2θ 1/2	IF= 20 mA	/	90	/	deg
Peak Wavelength	λp	IF= 20 mA	/	502	/	nm
Dominant Wavelength	λd	IF= 20 mA	/	505	/	nm
Spectrum Radiation Bandwidth	△λ	IF= 20 mA	/	30	/	nm

■ Typical Electro-Optical Characteristic Curves:

(UBG)

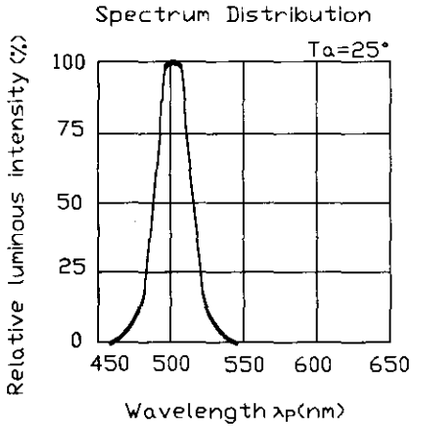

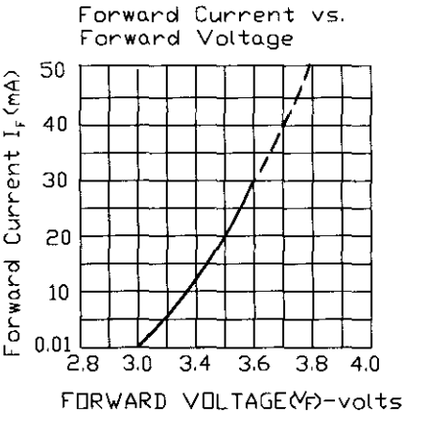

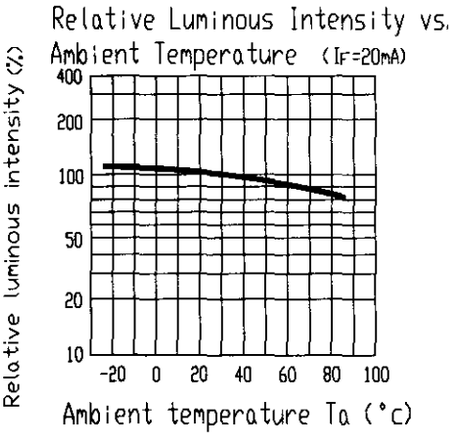

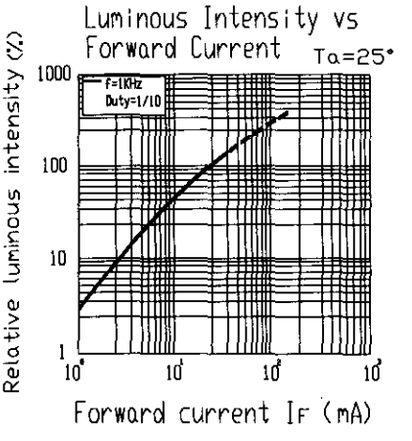

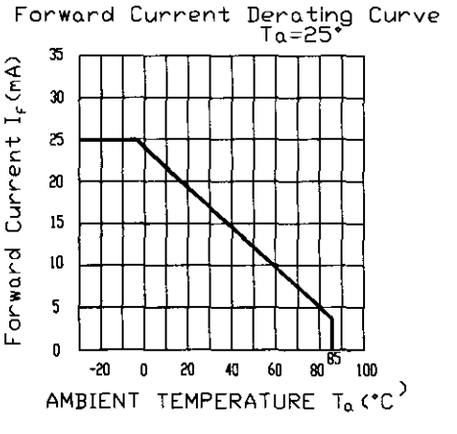

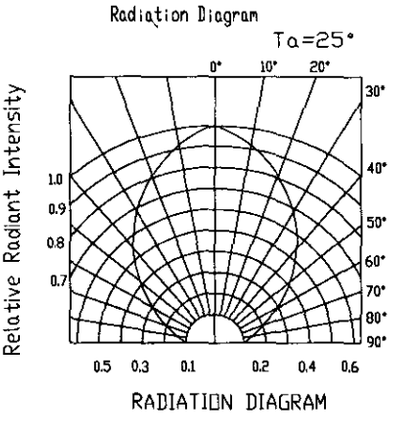

EVERLIGHT

Technical Data Sheet

3.0mm Round Type LED Lamps

3294-15UBGC/S400-A6

■ Reliability test items and conditions:

NO	Item	Test Conditions	Test Hours/Cycle	Sample size	Ac/Re
1	Solder Heat	TEMP : 260℃ ± 5 ℃	10 SEC	76 PCS	0/1
2	Temperature Cycle	H : +100℃ 15min ∫ 5 min L : -40℃ 15min	300 CYCLES	76 PCS	0/1
3	Thermal Shock	H : +100℃ 5min ∫ 10 sec L : -10℃ 5min	300 CYCLES	76 PCS	0/1
4	High Temperature Storage	TEMP : 100℃	1000 HRS	76 PCS	0/1
5	Low Temperature Storage	TEMP : -40℃	1000 HRS	76 PCS	0/1
6	DC Operating Life	TEMP : 25℃ I_F = 20mA	1000 HRS	76 PCS	0/1
7	High Temperature / High Humidity	85℃ / 85% RH	1000 HRS	76 PCS	0/1

Technical Data Sheet

3.0mm Round Type LED Lamps

3294-15UBGC/S400-A6

Packing Quantity Specification

1.1000PCS/1Bag, 10Bags/1Box

2.10Boxes/1Carton

Label Form Specification

EVERLIGHT

CPN:

P/N:

3294-15UBGC/S400-A6

QTY: CAT:

HUE:

REF:

LOT No:

MADE IN TAIWAN

CPN: Customer's Production Number

P/N : Production Number

QTY: Packing Quantity

CAT: Ranks

HUE: Peak Wavelength

REF: Reference

LOT No: Lot Number

MADE IN TAIWAN: Production Place

Notes

1. Above specification may be changed without notice. EVERLIGHT will reserve authority on material change for above specification.
2. When using this product, please observe the absolute maximum ratings and the instructions for using outlined in these specification sheets. EVERLIGHT assumes no responsibility for any damage resulting from use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.
3. These specification sheets include materials protected under copyright of EVERLIGHT corporation. Please do not reproduce or cause anyone to reproduce them without EVERLIGHT' sconsent.

EVERLIGHT ELECTRONICS CO., LTD. *Tel: 886-2-2267-2000, 2267-9936*

Office: No. 3, Chung Yang Rd, *Fax: 886-2267-6244, 2267-6189, 2267-6306*

Tucheng, Taipei Hsien, Taiwan, R.O.C *http://www.everlight.com*