CF5016 series

1.8V Operation Fundamental Frequency Crystal Oscillator Module ICs

OVERVIEW

The CF5016 series are 1.8V operation crystal oscillator ICs. They are available for frequencies up to 50MHz. They employ a recently developed low-voltage process optimized for operation at 1.8V, resulting in stable operation at low voltages while maintaining the same output duty stability of existing devices. They are ideally suited for battery-operated electronic equipment applications where small size, low-voltage operation, and low power dissipation are essential.

FEATURES

- 1.6 to 2.0V operating supply voltage range
- Up to 50MHz oscillation frequency range
- – 40 to 85°C operating temperature range
- Oscillation capacitors built-in
  - C_G = 18pF, C_D = 18pF
- Inverter amplifier feedback resistor built-in
- Standby function
  - High impedance in standby mode, oscillator stops
- Low standby current
  - Power-saving pull-up resistor built-in
- f_O, $f_O/2$, $f_O/4$, $f_O/8$, or $f_O/16$ output frequency, determined by internal connection
- CMOS output duty level (1/2VDD)
- Molybdenum-gate CMOS process
- Chip form (CF5016AL×)

SERIES CONFIGURATION

Version	Recommended operating frequency range[1] [MHz]		Built-in capacitance [pF]		Output frequency	Standby function
	C_L = 15pF	C_L = 30pF	C_G	C_D		
CF5016AL1	4 to 50	4 to 30	18	18	f_O	Yes
CF5016AL2					$f_O/2$	Yes
CF5016AL3					$f_O/4$	Yes
CF5016AL4					$f_O/8$	Yes
CF5016AL5					$f_O/16$	Yes


1. The recommended operating frequency is a yardstick value derived from the crystal used for NPC characteristics authentication. However, the oscillator frequency band is not guaranteed. Specifically, the characteristics can vary greatly due to crystal characteristics and mounting conditions, so the oscillation characteristics of components must be carefully evaluated.

ORDERING INFORMATION

Device	Package
CF5016AL×–2	Chip form

PAD LAYOUT


(Unit: µm)

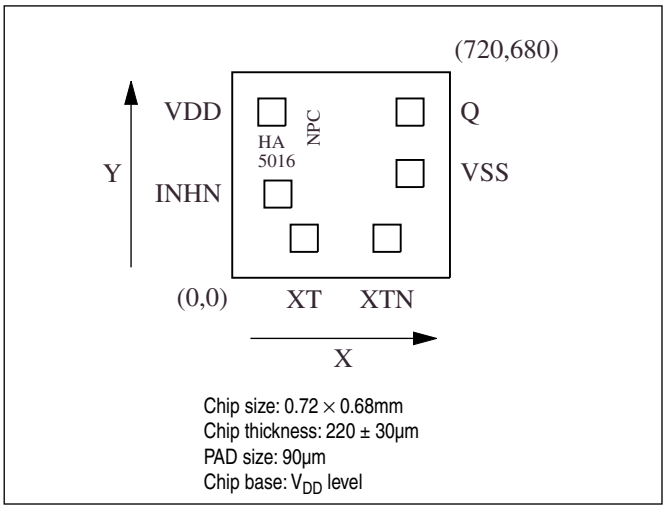

PIN DESCRIPTION and PAD DIMENSIONS

Name	I/O	Description		Pad dimensions [µm]	
				X	Y
INHN	I	Output state control input. High impedance when LOW (oscillator stops). Power-saving pull-up resistor built-in.		151	277
XT	I	Amplifier input	Crystal connection pins. Crystal is connected between XT and XTN.	238	131
XTN	O	Amplifier output		512	131
VSS	–	Ground		588	345
Q	O	Output. Output frequency (f_O, $f_O/2$, $f_O/4$, $f_O/8$, $f_O/16$) determined by internal connection		588	548
VDD	–	Supply voltage		131	548

BLOCK DIAGRAM

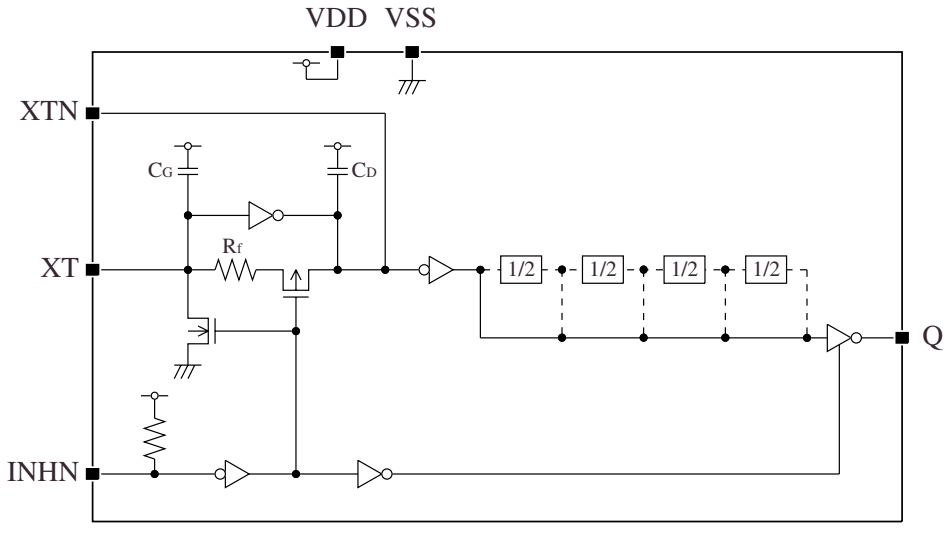

INHN = LOW active

SPECIFICATIONS

Absolute Maximum Ratings

V_{SS} = 0V

Parameter	Symbol	Condition	Rating	Unit
Supply voltage range	V_{DD}		–0.5 to +3.6	V
Input voltage range	V_{IN}		–0.5 to V_{DD} + 0.5	V
Output voltage range	V_{OUT}		–0.5 to V_{DD} + 0.5	V
Operating temperature range	T_{opr}		–40 to +85	°C
Storage temperature range	T_{STG}		–65 to +150	°C
Output current	I_{OUT}		12	mA

Recommended Operating Conditions

V_{SS} = 0V

Parameter	Symbol	Condition	Rating	Unit
Supply voltage range	V_{DD}		1.6 to 2.0	V
Input voltage range	V_{IN}		V_{SS} to V_{DD}	V
Operating temperature range	T_{OPR}		–40 to +85	°C
Operating frequency range	f_{OSC}	$C_L \leq$ 15pF	4 to 50*1	MHz
		$C_L \leq$ 30pF	4 to 30	MHz

*1. When the operating frequency is over 45MHz, the duty variation tends to increase.

Electrical Characteristics

V_{DD} = 1.6 to 2.0V, V_{SS} = 0V, Ta = –40 to +85°C unless otherwise noted.

Parameter	Symbol	Condition		Rating			Unit
				min	typ	max	
HIGH-level output voltage	V_{OH}	Q: Measurement cct 1, V_{DD} = 1.6V, I_{OH} = 2.8mA		1.1	1.4	–	V
LOW-level output voltage	V_{OL}	Q: Measurement cct 1, V_{DD} = 1.6V, I_{OL} = 2.8mA		–	0.3	0.4	V
HIGH-level input voltage	V_{IH}	INHN		0.7V_{DD}	–	–	V
LOW-level input voltage	V_{IL}	INHN		–	–	0.3V_{DD}	V
Output leakage current	I_Z	Q: Measurement cct 2, INHN = LOW	V_{OH} = V_{DD}	–	–	10	µA
			V_{OL} = V_{SS}	–	–	10	µA
Current consumption	I_{DD}	Measurement cct 3, load cct 1, INHN = open, C_L = 15pF, f = 50MHz	CF5016AL1	–	3.5	7	mA
			CF5016AL2	–	2.5	5	mA
			CF5016AL3	–	2	4	mA
			CF5016AL4	–	1.5	3	mA
			CF5016AL5	–	1	2	mA
Standby current	I_{ST}	Measurement cct 3, INHN = LOW		–	–	10	µA
INHN pull-up resistance	R_{UP1}	Measurement cct 4		2	6	12	MΩ
	R_{UP2}			30	150	300	kΩ
Feedback resistance	R_f	Measurement cct 5		100	300	600	kΩ
Built-in capacitance	C_G	Design value. A monitor pattern on a wafer is tested.		15.3	18	20.7	pF
	C_D			15.3	18	20.7	pF


Switching Characteristics

V_{DD} = 1.6 to 2.0V, V_{SS} = 0V, Ta = –40 to +85°C unless otherwise noted.

Parameter	Symbol	Condition		Rating min	Rating typ	Rating max	Unit
Output rise time	t_{r1}	Measurement cct 3, load cct 1, 0.2V_{DD} to 0.8V_{DD}	C_L = 15pF	–	2.5	5.0	ns
	t_{r2}		C_L = 30pF	–	4.0	8.0	
Output fall time	t_{f1}	Measurement cct 3, load cct 1, 0.8V_{DD} to 0.2V_{DD}	C_L = 15pF	–	2.5	5.0	ns
	t_{f2}		C_L = 30pF	–	4.0	8.0	
Output duty cycle[1]	Duty1	Measurement cct 3, load cct 1, V_{DD} = 1.8V, Ta = 25°C	C_L = 15pF f = 45MHz	45	–	55	%
	Duty2		C_L = 15pF f = 50MHz	40	–	60	%
	Duty3		C_L = 30pF f = 30MHz	45	–	55	%
Output disable delay time[2]	t_{PLZ}	Measurement cct 6, load cct 1, V_{DD} = 1.8V, Ta = 25°C, C_L = 15pF		–	–	200	ns
Output enable delay time[2]	t_{PZL}			–	–	200	ns

1. The duty cycle characteristic is checked the sample chips of each production lot.
2. Oscillator stop function is built-in. When INHN goes LOW, normal output stops. When INHN goes HIGH, normal output is not resumed until after the oscillator start-up time has elapsed.

Current consumption and Output waveform with NPC's standard crystal



f [MHz]	R [Ω]	L [mH]	Ca [fF]	Cb [pF]
30	5.26	2.82	9.99	2.68
40	8.24	5.72	2.77	2.22
50	16.12	6.88	1.43	1.18

FUNCTIONAL DESCRIPTION

Standby Function

When INHN goes LOW, the oscillator stops and the oscillator output on Q becomes high impedance.


INHN	Q	Oscillator
HIGH (or open)	Any f_O, f_O/2, f_O/4, f_O/8 or f_O/16 output frequency	Normal operation
LOW	High impedance	Stopped

Power-saving Pull-up Resistor

The INHN pull-up resistance changes in response to the input level (HIGH or LOW). When INHN goes LOW (standby state), the pull-up resistance becomes large to reduce the current consumption during standby.


MEASUREMENT CIRCUITS

Measurement cct 1

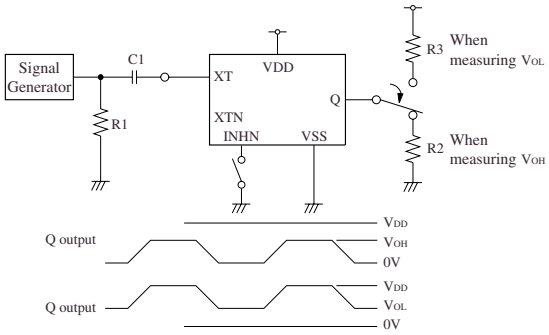


1Vp-p, 10MHz sine wave input signal
C1: 0.001µF
R1: 50Ω
R2: 393Ω
R3: 429Ω


Measurement cct 2

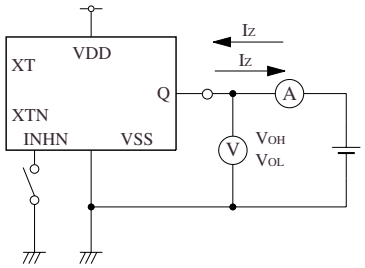

Measurement cct 3




Measurement cct 4



$R_{UP1} = \frac{V_{DD}}{I_{PR}}$ ($V_{PR} = V_{SS}$)


$R_{UP2} = \frac{V_{DD} - V_{PR}}{I_{PR}}$ ($V_{PR} = 0.7V_{DD}$)

Measurement cct 5




$R_f = \frac{V_{DD}}{I_{Rf}}$

Measurement cct 6

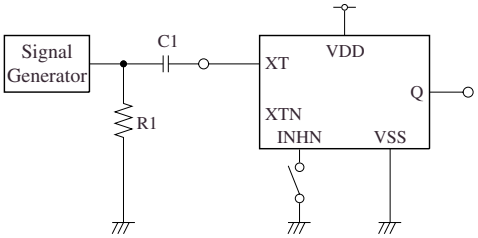


1Vp-p, 10MHz sine wave input signal
C1: 0.001µF
R1: 50Ω

Load cct 1

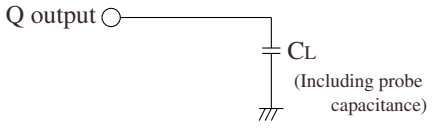


Switching Time Measurement Waveform

Output duty level

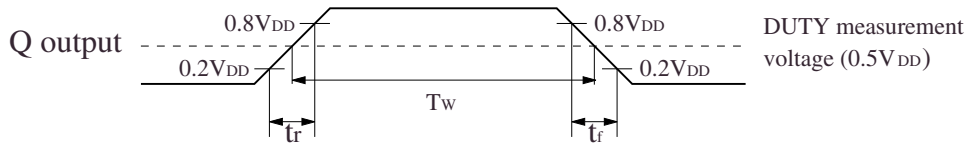


Output duty cycle

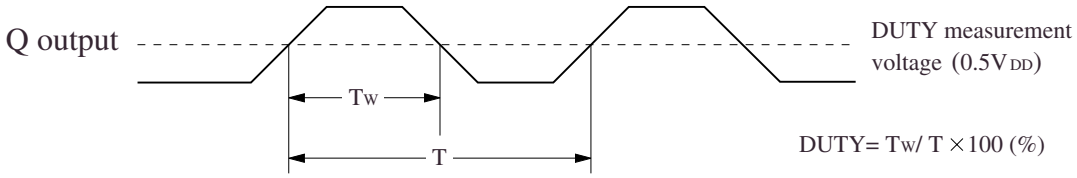

Output Enable/Disable Delay

when the device is in standby, the oscillator stops. When standby is released, the oscillator starts and stable oscillator output occurs after a short delay.

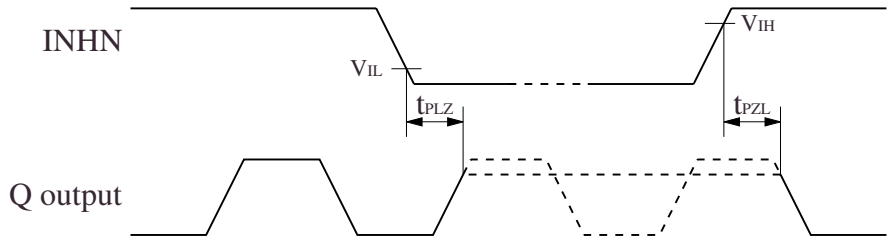

INHN input waveform $t_r = t_f \leq 10ns$

Please pay your attention to the following points at time of using the products shown in this document.

The products shown in this document (hereinafter “Products”) are not intended to be used for the apparatus that exerts harmful influence on human lives due to the defects, failure or malfunction of the Products. Customers are requested to obtain prior written agreement for such use from SEIKO NPC CORPORATION (hereinafter “NPC”). Customers shall be solely responsible for, and indemnify and hold NPC free and harmless from, any and all claims, damages, losses, expenses or lawsuits, due to such use without such agreement. NPC reserves the right to change the specifications of the Products in order to improve the characteristic or reliability thereof. NPC makes no claim or warranty that the contents described in this document dose not infringe any intellectual property right or other similar right owned by third parties. Therefore, NPC shall not be responsible for such problems, even if the use is in accordance with the descriptions provided in this document. Any descriptions including applications, circuits, and the parameters of the Products in this document are for reference to use the Products, and shall not be guaranteed free from defect, inapplicability to the design for the mass-production products without further testing or modification. Customers are requested not to export or re-export, directly or indirectly, the Products to any country or any entity not in compliance with or in violation of the national export administration laws, treaties, orders and regulations. Customers are requested appropriately take steps to obtain required permissions or approvals from appropriate government agencies.

SEIKO NPC CORPORATION

15-6, Nihombashi-kabutocho, Chuo-ku,
Tokyo 103-0026, Japan
Telephone: +81-3-6667-6601
Facsimile: +81-3-6667-6611
http://www.npc.co.jp/
Email: sales@npc.co.jp

NC0207BE 2006.04