


euro-block

product specification

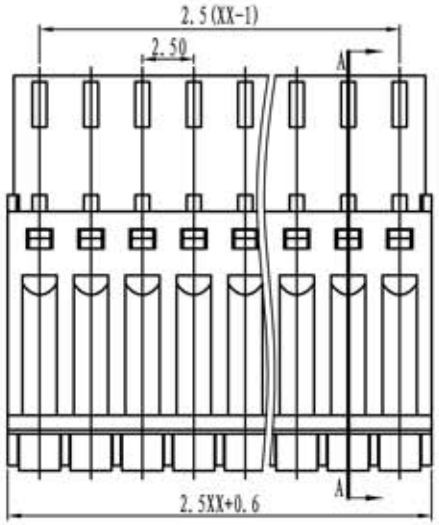

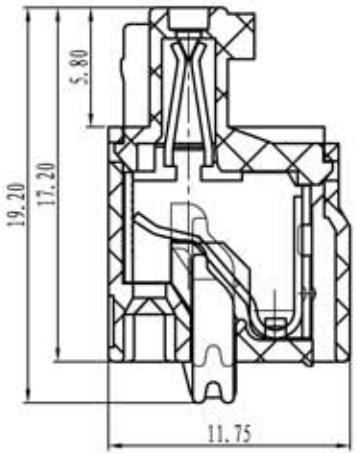

SECTION A-A

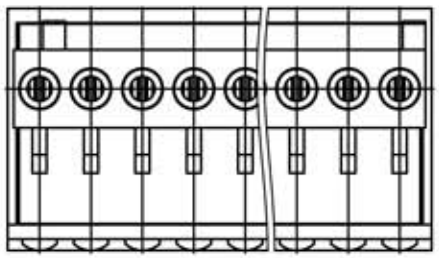

Versione/Version	Data/Date
2013-1	04/04/2013

TOLERANCES EXCEPT AS NOTED

	linear dimension(Tolerances Standard GB/T 14486-2008)												—	▱	//	⊥
variable range	to 6	over 6 to 10	over 10 to 18	over 18 to 30	over 30 to 50	over 50 to 80	over 80 to 120	over 120 to 160	over 160 to 200	over 200 to 250	over 250 to	all	to 5	over 5 to 30	over 30 to 120	over 120 to
tolerance	±0.1	±0.14	±0.19	±0.25	±0.32	±0.43	±0.57	±0.72	±0.88	±1.05	±1.25	0.5	0.025	0.06	0.12	0.4

Electrical

Standard	UL	IEC
Rated voltage	150V	250V
Rated current	4A	5A
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC1250V/1 Min	
Wire range	26-20 AWG - 0.5sqmm	

Mechanical

Temp. Range	-40°C + 105°C
Stripping lenght:	8 mm

Dimensions

Pitch	2,5 mm
Poles	2÷24

Material

Housing	PA66, UL94V0
Clamp	Phosphore Bronze, Nikel plated
Clamp 2	Stainless Steel

Schema generale del codice di ordinazione/General description of ordering code

Series	n. poles	pitch	version	color	custom
CFS	2÷24	2.50			

UNITS	mm	SIZE	A4	SCALE	

euro-block

FIRST ANGLE PROJECTION

CFS-2.5