


REV.	MODIFICATION.	DATE	DRN
01	Production release	19/01/10	MT
02	CO2010958	15/07/10	MT
03	CO2010965	28/07/10	MT
04	CO2011029	14/12/10	SF
05	CO2011176	27/7/11	SF


PART NUMBER	THREAD SIZE	CABLE DIAMETER		SUGGESTED CLEARANCE HOLE FOR NON THREADED MOUNTING	"L" ±0.5[.020]	"SW-1" ±0.5[.020]	"H" MAX REF	INSTALLATION TORQUE**
		MIN Ø	MAX Ø					
CG-NPT-3/8-1-BK	NPT-3/8	3[.118]	7[.276]	17[.670]	14.5[.571]	22[.866]	44.5[1.752]	2.2
CG-NPT-3/8-2-BK		5[.197]	10[.394]			24[.945]	45[1.772]	2.7
CG-NPT-1/2-1-BK	NPT-1/2	5[.197]	9[.236]	22.2[.875]	15[.591]	27[1.063]	47.5[1.870]	3.0
CG-NPT-1/2-2-BK		7[.276]	12[.472]			33[1.299]	52[2.047]	5.0
CG-NPT-1/2-3-BK	NPT-3/4	10[.394]	14[.551]	27.1[1.068]	18[.709]	42[1.654]	60.5[2.382]	7.5
CG-NPT-3/4-1-BK		9[.236]	16[.630]					
CG-NPT-3/4-2-BK	NPT-1	14[.551]	18[.709]	34.3[1.350]	18[.709]			
CG-NPT-1-1-BK		12[.472]	20[.787]					
CG-NPT-1-2-BK		19[.748]	25[.984]					
O RING INCLUDED WITH THREADS NPT-1								
PARTS AVAILABLE IN GREY (RAL 7035) BY SPECIAL ORDER. TO ORDER REMOVE -BK FROM END OF PART NUMBER.								
**TESTED WITH SPECIFIED TEST MANDRELS ACCORDING DIN EN 50262, CHAPTER 5.7. DEPENDING ON THE CABLE CONSTRUCTION DIFFERENCES ARE POSSIBLE.								

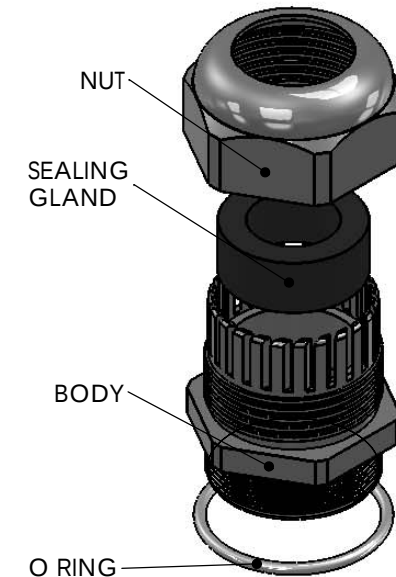


ALTERNATE UNITS FOR REFERENCE ONLY

SPECIAL ORDER EU REGION

INFORMATION CONTAINED IN THIS DOCUMENT IS CONFIDENTIAL TO RICHCO INTERNATIONAL Co. Ltd. AND MAY NOT BE DISCLOSED OR REPRODUCED IN WHOLE OR PART WITHOUT THEIR WRITTEN CONSENT.

RICHCO, INC. WWW.RICHCO-INC.COM		ALL DIMENSIONS IN mm[inch] GENERAL TOLERANCES UNLESS OTHERWISE STATED 1 DECIMAL PLACE ± 2 DECIMAL PLACES ± ANGULAR ±1°		THIRD ANGLE 	
MATERIAL: BODY AND NUT - NYLON 6 UL94 V-2 (RMS-036) SEALING GLAND - CR/NBR (RMS-037) O RING - NBR (RMS-041)				COLOUR: BODY AND NUT: BLACK, RAL 9005 SEAL: GREY, O RING: BLACK	
DESCRIPTION: CABLE GLANDS - NPT TYPE				PART No: CG-NPT-XX-X	
DRG No: 09-111		NPR No: EU09-0034		SHEET SIZE A4	
DRN MT	DATE 09/04/09	CHKD TC	DATE 08/10/09	SCALE NTS	SHEET No. 1 OF 1

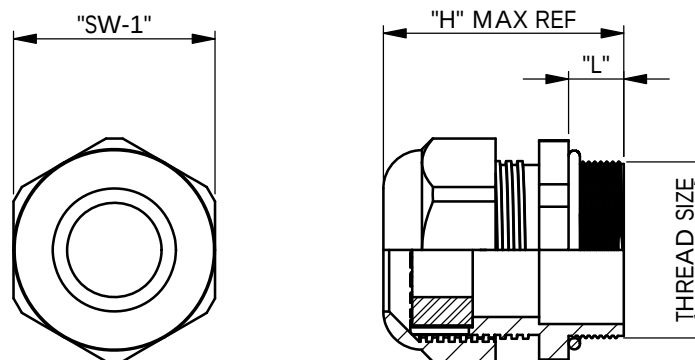

NOTES:
 TEMPERATURE RANGE -20°C TO +100°C
 PROTECTION GRADE IP68 - 5 BAR