

DC-6.0 GHz InGaP HBT, MMIC or Packaged Matched Gain Block Amplifier

Mimix
BROADBAND™

September 2006 - Rev 01-Sep-06

CGB7001-SC (-BD)
RoHS

Features

- ✕ Low Operating Voltage: 5V
- ✕ 28.0 dBm Output IP3 @ 850 MHz
- ✕ 3.3 dB Noise Figure @ 850 MHz
- ✕ 20.5 dB Gain @ 850 MHz
- ✕ 14.2 dBm P1dB @ 850 MHz
- ✕ Low Performance Variation Over Temperature
- ✕ Low Cost: Die Form or SOT-89 Package
- ✕ 100% DC On-Wafer Testing
- ✕ ESD Protection on All Die: >1000V HBM
- ✕ Low Thermal Resistance: <110°C/Watt

Description


The CGB7001-SC (-BD) is a Darlington Configured, high dynamic range, utility gain block amplifier. Designed for applications operating within the DC to 6.0 GHz frequency range, Mimix's broadband, cascadable, gain block amplifiers are ideal solutions for transmit, receive and IF applications.

These MMIC amplifiers are available in bare die form or an industry standard SOT-89 package. Mimix's InGaP HBT technology and an industry low thermal resistance offers a thermally robust and reliable gain block solution.

The InGaP HBT die have extra pads to enable thorough DC testing. This unique test capability and the inclusion of ESD protection on all die, significantly enhances the quality, reliability and ruggedness of these products.

With a single bypass capacitor, optional RF choke and two DC blocking capacitors, this gain block amplifier offers significant ease of use in a broad range of applications.

Functional Block Diagram (SOT-89)



Absolute Maximum Ratings

Max Device Voltage	+5.5 V
Max Device Current	110 mA
Max Device Dissipated Power	0.45 W
RF Input Power	+17 dBm
Storage Temperature	-55°C to 150°C
Junction Temperature	150°C
Operating Temperature	-40°C to +85°C
Thermal Resistance	110° C/W
EDS (HBM)	1000 V

Operation of this device above any of these parameters may cause permanent damage.

Applications

- ✕ PA Driver Amp, IF Amp, LO Buffer Amp
- ✕ Cellular, PCS, GSM, UMTS
- ✕ Wireless Data and SATCOM
- ✕ Transmit and Receive Functions
- ✕ CATV

Electrical Characteristics

Unless otherwise specified, the following specifications are guaranteed at room temperature in a Mimix test fixture.

Parameter	Temperature (°C)	850 MHz			1950 MHz			2400 MHz			3500 MHz			Units
		Min.	Typ.	Max.	Min.	Typ.	Max.	Min.	Typ.	Max.	Min.	Typ.	Max.	
Small Signal Gain	+25	19.5	20.5	21.5	16.8	17.8	18.8	16.0	17.0	18.0		14.8		dB
	-40 to +85	19.2	20.5	21.8	16.5	17.8	19.1	17.0	17.0	18.3		14.8		dB
Output P1dB	+25	13.2	14.2		12.5	13.5		12.1	13.1			11.1		dBm
	-40 to +85	11.5	14.2		11.0	13.5		11.0	13.1			11.1		dBm
Output IP3	+25	26.5	28.0		25.5	27.0		25.0	26.5			24.0		dBm
	-40 to +85	25.0	28.0		24.0	27.0		24.0	26.5			24.0		dBm
Noise Figure	+25		3.3	4.1		3.5	4.3		3.6	4.4		3.8		dB
	-40 to +85		3.3	4.4		3.5	4.7		3.6	4.8		3.8		dB
Operating Current	+25	32	35	39	32	35	39	32	35	38		35		mA
	-40 to +85	28	35	43	28	35	43	28	35	42		35		mA
Input Return Loss	+25	12	16		11	15		11	15			15		dB
	-40 to +85	11	16		10	15		10	15			15		dB
Output Return Loss	+25	18	23		13	18		13	18			15		dB
	-40 to +85	17	23		12	18		12	18			15		dB
Pout @ -45 dBc, ACP IS-95, 9 Forward Channels	+25		10.0			10.0								dBm
	-40 to +85		9.0			10.0								dBm

Notes: 1. Test Conditions in Mimix eval board, Vs = 5 V, Id = 35 mA Typ., Rbias = 27 Ω, Zs = Zl = 50 Ω, OIP3 tone spacing = 1 MHz, Pout per tone = 3 dBm.
2. Values reflect performance in recommended application circuit.

Mimix Broadband, Inc., 10795 Rockley Rd., Houston, Texas 77099
Tel: 281.988.4600 Fax: 281.988.4615 mimixbroadband.com

Page 1 of 8

Characteristic Data and Specifications are subject to change without notice. ©2006 Mimix Broadband, Inc.
Export of this item may require appropriate export licensing from the U.S. Government. In purchasing these parts, U.S. Domestic customers accept their obligation to be compliant with U.S. Export Laws.






DC-6.0 GHz InGaP HBT, MMIC or Packaged Matched Gain Block Amplifier

Mimix
BROADBAND™

September 2006 - Rev 01-Sep-06

CGB700I-SC (-BD)
RoHS

Typical S-Parameter and Noise Performance

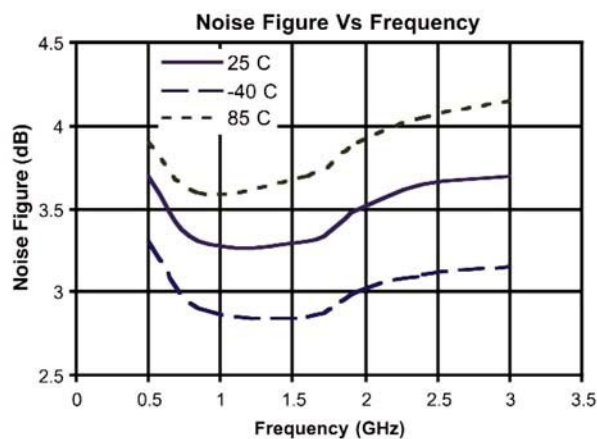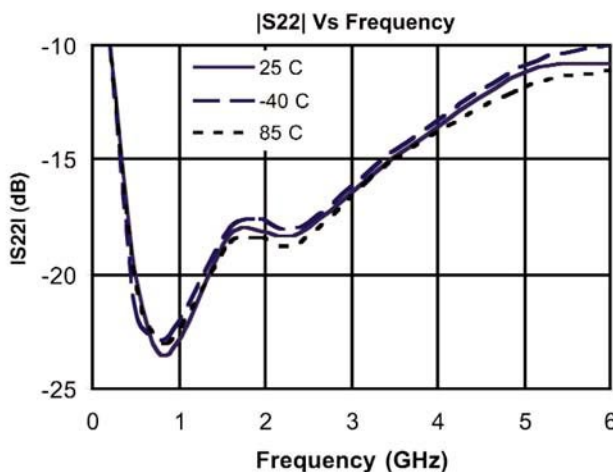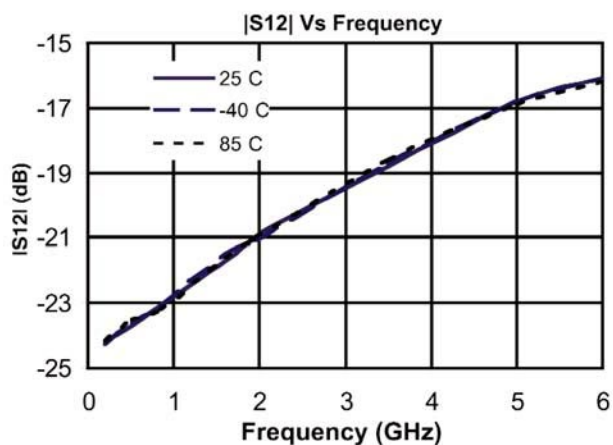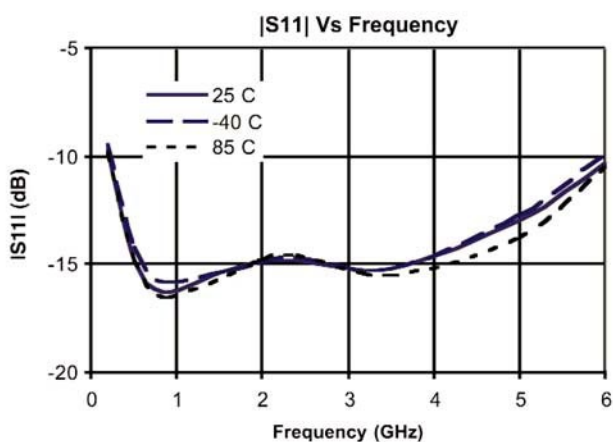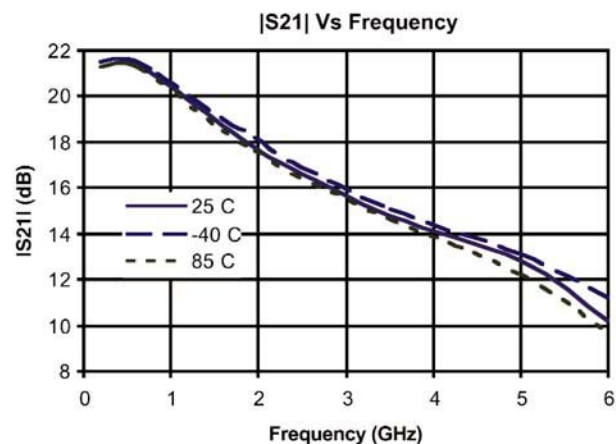

Mimix Broadband, Inc., 10795 Rockley Rd., Houston, Texas 77099
Tel: 281.988.4600 Fax: 281.988.4615 mimixbroadband.com

Page 2 of 8

Characteristic Data and Specifications are subject to change without notice. ©2006 Mimix Broadband, Inc.
Export of this item may require appropriate export licensing from the U.S. Government. In purchasing these parts, U.S. Domestic customers accept their obligation to be compliant with U.S. Export Laws.



DC-6.0 GHz InGaP HBT, MMIC or Packaged Matched Gain Block Amplifier

Mimix
BROADBAND™





September 2006 - Rev 01-Sep-06

CGB7001-SC (-BD)
RoHS

Typical S-Parameter and Noise Performance (cont.)

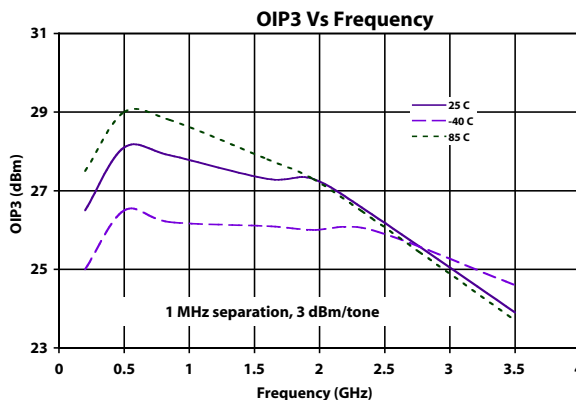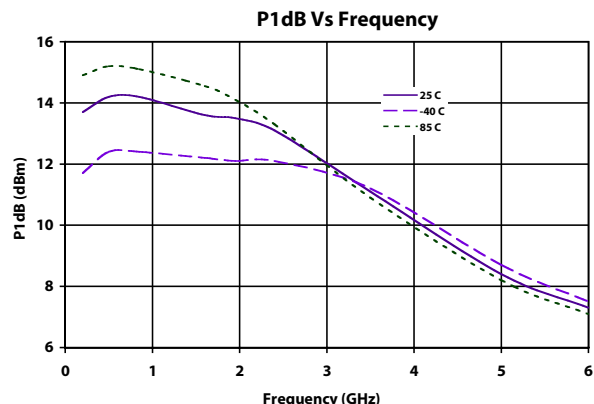

Linearity Performance - Base Station ACP - IS-95

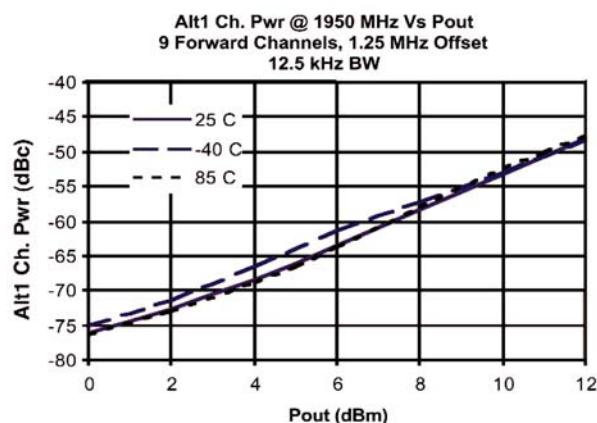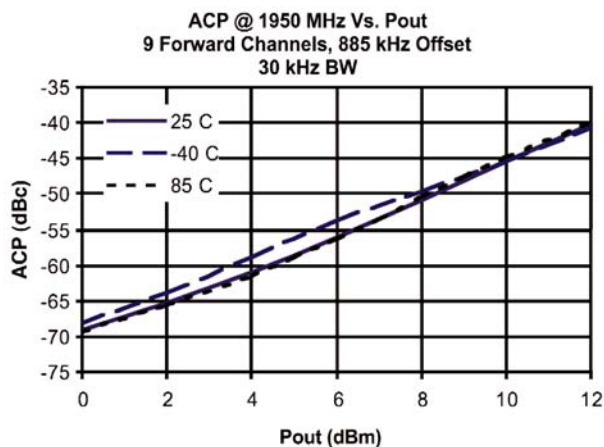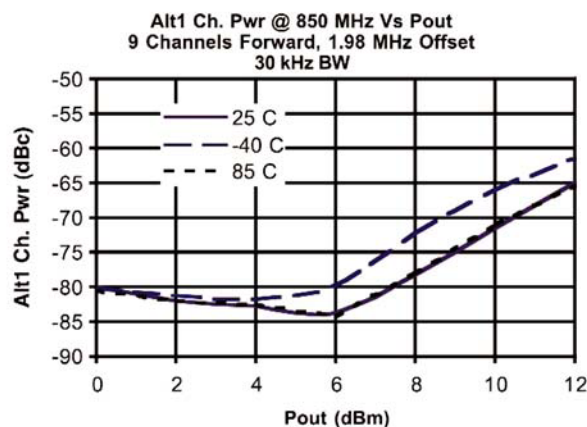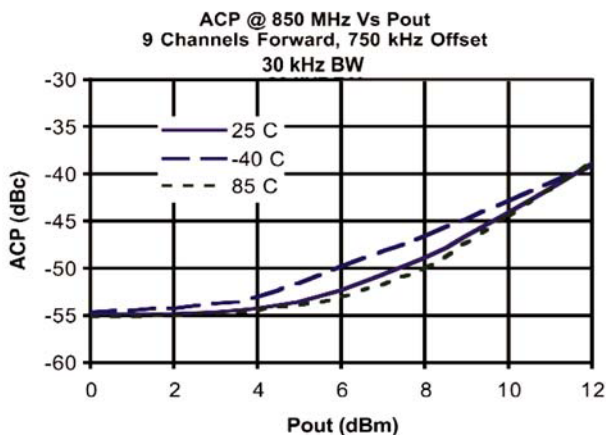

Mimix Broadband, Inc., 10795 Rockley Rd., Houston, Texas 77099
Tel: 281.988.4600 Fax: 281.988.4615 mimixbroadband.com

Page 3 of 8

Characteristic Data and Specifications are subject to change without notice. ©2006 Mimix Broadband, Inc.
Export of this item may require appropriate export licensing from the U.S. Government. In purchasing these parts, U.S. Domestic customers accept their obligation to be compliant with U.S. Export Laws.

DC-6.0 GHz InGaP HBT, MMIC or Packaged Matched Gain Block Amplifier

Mimix
BROADBAND™

September 2006 - Rev 01-Sep-06

CGB700I-SC (-BD)
RoHS

Typical Scattering Parameters (Vd = +4.1V, Icc = 35.7 mA, T = 23°C, device in a 50 ohm system)

Frequency (MHz)	S ₁₁		S ₂₁		S ₁₂		S ₂₂	
	(Mag)	(Ang)	(Mag)	(Ang)	(Mag)	(Ang)	(Mag)	(Ang)
100	0.111	-9.7	12.53	172.9	0.065	-0.5	0.141	-12.6
200	0.113	-19.0	12.42	165.8	0.065	-0.8	0.142	-25.3
300	0.115	-28.2	12.30	159.0	0.065	-1.2	0.145	-36.9
400	0.119	-36.6	12.11	152.1	0.066	-1.6	0.150	-48.0
500	0.124	-44.6	11.92	145.5	0.067	-2.2	0.155	-58.1
600	0.129	-52.2	11.70	138.9	0.067	-2.8	0.160	-68.0
700	0.134	-58.9	11.45	132.5	0.068	-3.3	0.165	-77.0
800	0.140	-65.3	11.19	126.2	0.069	-4.2	0.170	-85.1
900	0.146	-71.2	10.93	120.0	0.071	-5.0	0.174	-92.8
1000	0.152	-76.8	10.66	114.0	0.072	-6.0	0.178	-99.9
1100	0.159	-81.8	10.39	108.0	0.073	-7.0	0.182	-106.6
1200	0.165	-86.4	10.10	102.2	0.075	-8.1	0.184	-112.7
1300	0.171	-90.8	9.83	96.6	0.076	-9.4	0.186	-118.5
1400	0.178	-94.8	9.56	91.0	0.078	-10.6	0.187	-123.7
1500	0.185	-98.5	9.29	85.6	0.080	-12.0	0.188	-128.8
1600	0.191	-102.1	9.04	80.3	0.081	-13.5	0.188	-133.5
1700	0.197	-105.6	8.79	75.0	0.083	-15.0	0.187	-138.0
1800	0.203	-108.9	8.54	69.9	0.085	-16.7	0.186	-142.2
1900	0.209	-112.2	8.31	64.9	0.087	-18.3	0.184	-146.2
2000	0.215	-115.4	8.09	59.9	0.089	-20.1	0.181	-150.1
2100	0.221	-118.5	7.87	55.0	0.091	-21.9	0.179	-153.6
2200	0.227	-121.5	7.66	50.2	0.093	-23.8	0.175	-157.1
2300	0.232	-124.5	7.47	45.5	0.094	-25.7	0.172	-160.4
2400	0.238	-127.3	7.27	40.8	0.097	-27.6	0.168	-163.4
2500	0.244	-130.3	7.09	36.1	0.099	-29.7	0.164	-166.4
2600	0.248	-133.1	6.92	31.5	0.101	-31.8	0.159	-169.3
2700	0.252	-135.9	6.75	27.1	0.103	-33.9	0.154	-172.1
2800	0.256	-138.9	6.60	22.6	0.105	-36.2	0.150	-174.7
2900	0.261	-142.1	6.45	18.1	0.107	-38.5	0.145	-177.7
3000	0.265	-145.0	6.31	13.7	0.109	-40.8	0.139	-179.9
3100	0.268	-147.9	6.17	9.3	0.111	-43.0	0.135	-177.4
3200	0.271	-150.9	6.05	5.0	0.114	-45.4	0.129	-174.7
3300	0.274	-154.2	5.93	0.7	0.116	-47.9	0.124	-171.6
3400	0.276	-157.6	5.81	-3.7	0.118	-50.3	0.119	-168.4
3500	0.278	-161.0	5.70	-8.0	0.120	-52.9	0.113	-165.1
3600	0.279	-164.4	5.59	-12.3	0.123	-55.4	0.107	-161.6
3700	0.278	-167.9	5.49	-16.6	0.125	-58.0	0.101	-157.5
3800	0.278	-171.4	5.40	-20.9	0.127	-60.5	0.094	-152.6
3900	0.276	-175.5	5.30	-25.2	0.130	-63.3	0.088	-147.3
4000	0.275	-179.5	5.21	-29.5	0.132	-66.0	0.081	-141.2
4100	0.272	-176.5	5.13	-33.8	0.134	-68.8	0.075	-134.0
4200	0.268	-172.3	5.04	-38.1	0.137	-71.6	0.069	-125.5
4300	0.264	-167.9	4.97	-42.4	0.139	-74.5	0.063	-114.5
4400	0.258	-163.1	4.89	-46.7	0.141	-77.4	0.059	-101.5
4500	0.252	-158.2	4.82	-51.1	0.144	-80.4	0.057	-86.9
4600	0.246	-153.1	4.74	-55.4	0.146	-83.3	0.058	-71.3
4700	0.238	-147.7	4.67	-59.7	0.148	-86.4	0.063	-55.9
4800	0.230	-142.0	4.60	-64.1	0.150	-89.5	0.071	-41.8
4900	0.221	-135.6	4.54	-68.5	0.153	-92.7	0.082	-30.1
5000	0.212	-128.4	4.47	-73.0	0.155	-96.0	0.096	-19.7

Continues Next Page. S-Parameter Data Files are available online at: www.mimixbroadband.com

Mimix Broadband, Inc., 10795 Rockley Rd., Houston, Texas 77099
Tel: 281.988.4600 Fax: 281.988.4615 mimixbroadband.com

Page 4 of 8

Characteristic Data and Specifications are subject to change without notice. ©2006 Mimix Broadband, Inc.
Export of this item may require appropriate export licensing from the U.S. Government. In purchasing these parts, U.S. Domestic customers accept their obligation to be compliant with U.S. Export Laws.

DC-6.0 GHz InGaP HBT, MMIC or Packaged Matched Gain Block Amplifier

Mimix
BROADBAND™

September 2006 - Rev 01-Sep-06

CGB700I-SC (-BD)
RoHS

Typical Scattering Parameters (Vd = +4.1V, Icc = 35.7 mA, T = 23°C, device in a 50 ohm system)

Frequency (MHz)	S ₁₁ (Mag)	(Ang)	S ₂₁ (Mag)	(Ang)	S ₁₂ (Mag)	(Ang)	S ₂₂ (Mag)	(Ang)
5100	0.203	121.1	4.40	-77.5	0.157	-99.2	0.111	11.0
5200	0.195	113.4	4.34	-81.9	0.159	-102.6	0.128	3.8
5300	0.187	104.6	4.27	-86.5	0.160	-105.8	0.146	-2.6
5400	0.180	95.0	4.20	-91.0	0.162	-109.3	0.166	-8.6
5500	0.175	84.4	4.13	-95.6	0.164	-112.8	0.187	-14.1
5600	0.172	73.4	4.07	-100.2	0.165	-116.3	0.209	-19.1
5700	0.171	62.1	4.00	-104.8	0.166	-119.8	0.231	-23.7
5800	0.174	50.2	3.92	-109.5	0.168	-123.4	0.255	-28.5
5900	0.179	38.2	3.84	-114.1	0.168	-127.1	0.280	-33.1
6000	0.190	27.0	3.77	-118.8	0.169	-130.7	0.304	-37.5
6100	0.202	16.4	3.69	-123.5	0.169	-134.4	0.329	-41.7
6200	0.217	6.5	3.61	-128.2	0.169	-138.1	0.354	-45.8
6300	0.234	-2.8	3.52	-132.9	0.169	-141.8	0.379	-49.9
6400	0.252	-11.4	3.44	-137.5	0.168	-145.4	0.404	-54.0
6500	0.272	-19.4	3.35	-142.1	0.168	-149.2	0.429	-57.9
6600	0.293	-26.6	3.26	-146.7	0.167	-152.8	0.453	-61.9
6700	0.314	-33.2	3.18	-151.3	0.166	-156.4	0.477	-65.6
6800	0.335	-39.5	3.09	-155.9	0.164	-160.0	0.499	-69.3
6900	0.356	-45.6	3.00	-160.4	0.163	-163.6	0.522	-73.0
7000	0.378	-51.3	2.90	-164.8	0.161	-167.2	0.543	-76.7
7100	0.398	-56.6	2.81	-169.1	0.159	-170.6	0.564	-80.2
7200	0.419	-61.7	2.72	-173.5	0.157	-174.1	0.583	-83.7
7300	0.437	-66.6	2.64	-177.8	0.155	-177.5	0.601	-87.2
7400	0.456	-71.3	2.55	-178.1	0.153	-179.2	0.618	-90.5
7500	0.474	-75.8	2.47	-173.9	0.150	-175.9	0.635	-93.7
7600	0.491	-80.1	2.38	-169.9	0.148	-172.8	0.650	-97.0
7700	0.507	-84.2	2.30	-165.9	0.145	-169.6	0.664	-100.0
7800	0.521	-88.2	2.22	-162.0	0.143	-166.5	0.677	-103.1
7900	0.534	-92.0	2.15	-158.2	0.141	-163.6	0.689	-106.1
8000	0.547	-95.8	2.08	-154.4	0.138	-160.6	0.701	-108.9
8100	0.560	-99.3	2.00	-150.7	0.136	-157.7	0.712	-111.8
8200	0.571	-102.7	1.94	-147.0	0.133	-154.9	0.721	-114.5
8300	0.582	-106.0	1.87	-143.4	0.131	-152.1	0.729	-117.2
8400	0.591	-109.4	1.81	-139.9	0.129	-149.2	0.738	-119.8
8500	0.599	-112.6	1.75	-136.4	0.127	-146.7	0.746	-122.3
8600	0.608	-115.8	1.69	-133.0	0.125	-143.9	0.752	-124.8
8700	0.615	-118.7	1.64	-129.6	0.123	-141.2	0.760	-127.3
8800	0.622	-121.6	1.59	-126.3	0.120	-138.9	0.765	-129.7
8900	0.627	-124.4	1.54	-123.0	0.118	-136.4	0.770	-132.0
9000	0.632	-127.3	1.49	-119.7	0.117	-133.8	0.774	-134.3
9100	0.637	-130.1	1.45	-116.5	0.115	-131.4	0.779	-136.6
9200	0.641	-132.7	1.40	-113.3	0.113	-128.9	0.783	-138.8
9300	0.644	-135.3	1.36	-110.2	0.112	-126.6	0.786	-141.0
9400	0.647	-137.9	1.32	-107.1	0.110	-124.2	0.789	-143.1
9500	0.649	-140.4	1.29	-104.0	0.109	-121.9	0.791	-145.2
9600	0.651	-143.0	1.25	-101.0	0.107	-119.6	0.793	-147.2
9700	0.653	-145.4	1.22	-97.9	0.106	-117.3	0.795	-149.2
9800	0.654	-147.8	1.19	-94.9	0.105	-114.9	0.797	-151.2
9900	0.654	-150.1	1.15	-92.0	0.103	-112.5	0.799	-153.2
10000	0.654	-152.5	1.13	-89.0	0.102	-110.4	0.800	-155.1

S-Parameter Data Files are available online at: www.mimixbroadband.com

Mimix Broadband, Inc., 10795 Rockley Rd., Houston, Texas 77099
Tel: 281.988.4600 Fax: 281.988.4615 mimixbroadband.com

Page 5 of 8

Characteristic Data and Specifications are subject to change without notice. ©2006 Mimix Broadband, Inc.
Export of this item may require appropriate export licensing from the U.S. Government. In purchasing these parts, U.S. Domestic customers accept their obligation to be compliant with U.S. Export Laws.

DC-6.0 GHz InGaP HBT, MMIC or Packaged Matched Gain Block Amplifier

Mimix
BROADBAND™

September 2006 - Rev 01-Sep-06



CGB700I-SC (-BD)
RoHS

Application Circuit

Note: This schematic represents the topology of the application circuit recommended by Mimix.

Recommended Bias Resistor Values for $I_D = 35 \text{ mA}$						
Supply Voltage (V)	5V	6V	7V	8V	10V	12V
Rbias (R1 Description: 0805 1/8W 1%)	27 Ω	55 Ω	84 Ω	—	—	—
Rbias (R1 Description: 1206 1/4W 1%)	—	—	—	113 Ω	169 Ω	—
Rbias (R1 Description: 1210 1/2W 5%)	—	—	—	—	—	220 Ω

Note: Rbias provides DC bias stability over temperature.

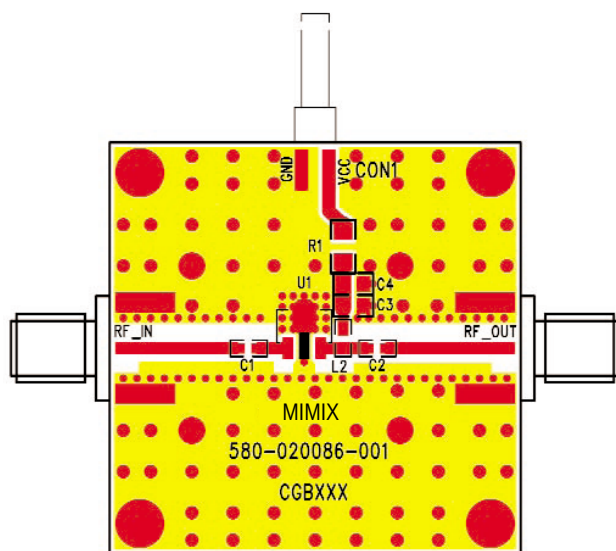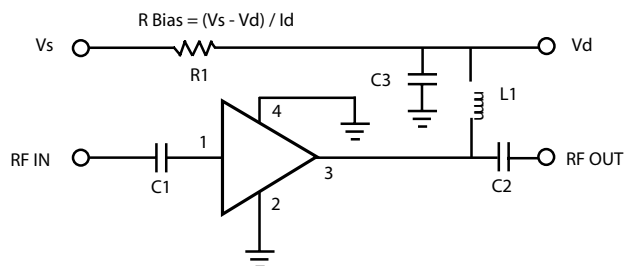

Ref Designator	Value	Description	Size
C1, C2	1000 pF	MCH185A101JK	0805
C3	1.0 μ F	VITR 1.0 μ F 25V CER CAP 0805 X7R 10%	0805
L1	56 nH	Coilcraft 0603 CS 10%	0603
R1		R Bias = $(V_s - V_d) / I_d$	0805 / 1206 / 1210
C4		DNP (Do Not Place)	N/A

CGB700I-SC (-BD)

Technical drawing of a rectangular component with dimensions in millimeters and inches. The drawing includes a top view and a side view.

Top View Dimensions:

- Overall width: 4.50 [0.177]
- Overall height: 0.71 [0.028]
- Internal width (excluding top flange): 1.73 [0.068]
- Top flange width: 0.41 [0.016]
- Internal height (excluding top flange): 2.50 [0.096]
- Bottom flange width: 0.99 [0.039]
- Bottom flange height: 0.46 [0.18] 3X
- Internal width (excluding bottom flange): 1.50 [0.059]
- Internal height (excluding bottom flange): 3.00 [0.118]
- Overall width (including bottom flange): 0.76 [0.030]

Side View Dimensions:


- Overall width: 1.55 [0.061]
- Overall height: 0.38 [0.015]
- Internal width (excluding top flange): 0.38 [0.015]
- Top flange width: 0.41 [0.163]
- Internal height (excluding top flange): 2.06 [0.081]
- Bottom flange width: 0.38 [0.015]

Component Details:

- Top flange: Labeled with the number 4.
- Bottom flange: Labeled with the number 1.
- Internal features: Labeled with the number 2.
- Internal features: Labeled with the number 3.
- Internal features: Labeled with the number 4.
- Internal features: Labeled with the number 5.
- Internal features: Labeled with the number 6.
- Internal features: Labeled with the number 7.
- Internal features: Labeled with the number 8.
- Internal features: Labeled with the number 9.
- Internal features: Labeled with the number 10.
- Internal features: Labeled with the number 11.
- Internal features: Labeled with the number 12.
- Internal features: Labeled with the number 13.
- Internal features: Labeled with the number 14.
- Internal features: Labeled with the number 15.
- Internal features: Labeled with the number 16.
- Internal features: Labeled with the number 17.
- Internal features: Labeled with the number 18.
- Internal features: Labeled with the number 19.
- Internal features: Labeled with the number 20.
- Internal features: Labeled with the number 21.
- Internal features: Labeled with the number 22.
- Internal features: Labeled with the number 23.
- Internal features: Labeled with the number 24.
- Internal features: Labeled with the number 25.
- Internal features: Labeled with the number 26.
- Internal features: Labeled with the number 27.
- Internal features: Labeled with the number 28.
- Internal features: Labeled with the number 29.
- Internal features: Labeled with the number 30.
- Internal features: Labeled with the number 31.
- Internal features: Labeled with the number 32.
- Internal features: Labeled with the number 33.
- Internal features: Labeled with the number 34.
- Internal features: Labeled with the number 35.
- Internal features: Labeled with the number 36.
- Internal features: Labeled with the number 37.
- Internal features: Labeled with the number 38.
- Internal features: Labeled with the number 39.
- Internal features: Labeled with the number 40.
- Internal features: Labeled with the number 41.
- Internal features: Labeled with the number 42.
- Internal features: Labeled with the number 43.
- Internal features: Labeled with the number 44.
- Internal features: Labeled with the number 45.
- Internal features: Labeled with the number 46.
- Internal features: Labeled with the number 47.
- Internal features: Labeled with the number 48.
- Internal features: Labeled with the number 49.
- Internal features: Labeled with the number 50.
- Internal features: Labeled with the number 51.
- Internal features: Labeled with the number 52.
- Internal features: Labeled with the number 53.
- Internal features: Labeled with the number 54.
- Internal features: Labeled with the number 55.
- Internal features: Labeled with the number 56.
- Internal features: Labeled with the number 57.
- Internal features: Labeled with the number 58.
- Internal features: Labeled with the number 59.
- Internal features: Labeled with the number 60.
- Internal features: Labeled with the number 61.
- Internal features: Labeled with the number 62.
- Internal features: Labeled with the number 63.
- Internal features: Labeled with the number 64.
- Internal features: Labeled with the number 65.
- Internal features: Labeled with the number 66.
- Internal features: Labeled with the number 67.
- Internal features: Labeled with the number 68.
- Internal features: Labeled with the number 69.
- Internal features: Labeled with the number 70.
- Internal features: Labeled with the number 71.
- Internal features: Labeled with the number 72.
- Internal features: Labeled with the number 73.
- Internal features: Labeled with the number 74.
- Internal features: Labeled with the number 75.
- Internal features: Labeled with the number 76.
- Internal features: Labeled with the number 77.
- Internal features: Labeled with the number 78.
- Internal features: Labeled with the number 79.
- Internal features: Labeled with the number 80.
- Internal features: Labeled with the number 81.
- Internal features: Labeled with the number 82.
- Internal features: Labeled with the number 83.
- Internal features: Labeled with the number 84.
- Internal features: Labeled with the number 85.
- Internal features: Labeled with the number 86.
- Internal features: Labeled with the number 87.
- Internal features: Labeled with the number 88.
- Internal features: Labeled with the number 89.
- Internal features: Labeled with the number 90.
- Internal features: Labeled with the number 91.
- Internal features: Labeled with the number 92.
- Internal features: Labeled with the number 93.
- Internal features: Labeled with the number 94.
- Internal features: Labeled with the number 95.
- Internal features: Labeled with the number 96.
- Internal features: Labeled with the number 97.
- Internal features: Labeled with the number 98.
- Internal features: Labeled with the number 99.
- Internal features: Labeled with the number 100.

Dimensions in Millimeters [Inches]

MARKINGS:
 XXXXXXX = CELERITEK MODEL NO.
 XXXXXX = WAFER LOT NO.
 ZYYWW = DATE CODE (YR/WEEK)
 FIRST LETTER COUNTRY OF ORIGIN IF OTHER THAN USA

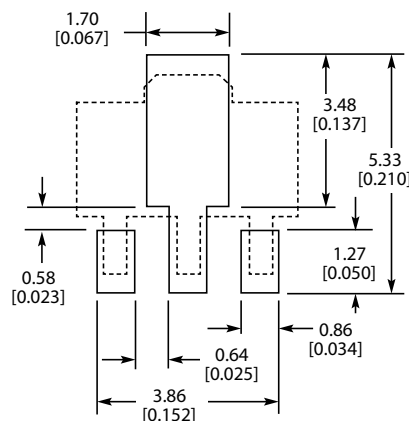

The diagram shows a rectangular layout for a 100-MHz RF resonator. The overall dimensions are 480 μm in width and 450 μm in height. The layout includes two 'RF IN' pads, one 'RF OUT' pad, and three 'GND' pads. The pads are arranged within a central rectangular area, with 'RF IN' pads at the top-left and bottom-left, 'RF OUT' at the bottom-right, and 'GND' pads at the top-right, center, and bottom-center.

Notes:
RF OUT bonding pad is 75 μm x 155 μm .
All other pads are 75 μm x 75 μm .



Caution: ESD Sensitive
Appropriate precautions in handling, packaging and testing devices must be observed.

DC-6.0 GHz InGaP HBT, MMIC or Packaged Matched Gain Block Amplifier



September 2006 - Rev 01-Sep-06

CGB7001-SC (-BD)
XRoHS

Handling and Assembly Information

CAUTION! - Mimix Broadband MMIC Products contain gallium arsenide (GaAs) which can be hazardous to the human body and the environment. For safety, observe the following procedures:

- Do not ingest.
- Do not alter the form of this product into a gas, powder, or liquid through burning, crushing, or chemical processing as these by-products are dangerous to the human body if inhaled, ingested, or swallowed.
- Observe government laws and company regulations when discarding this product. This product must be discarded in accordance with methods specified by applicable hazardous waste procedures.

Life Support Policy - Mimix Broadband's products are not authorized for use as critical components in life support devices or systems without the express written approval of the President and General Counsel of Mimix Broadband. As used herein: (1) Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user. (2) A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

Package Attachment - This packaged product from Mimix Broadband is provided as a rugged surface mount package compatible with high volume solder installation. Care should be taken not to apply heavy pressure to the top or base material to avoid package damage. Vacuum tools or other suitable pick and place equipment may be used to pick and place this part. Care should be taken to ensure that there are no voids or gaps in the solder connection so that good RF, DC and ground connections are maintained. Voids or gaps can eventually lead not only to RF performance degradation, but reduced reliability and life of the product due to thermal stress.

Mimix Lead-Free RoHS Compliant Program - Mimix has an active program in place to meet customer and governmental requirements for eliminating lead (Pb) and other environmentally hazardous materials from our products. All Mimix RoHS compliant components are form, fit and functional replacements for their non-RoHS equivalents. Lead plating of our RoHS compliant parts is 100% matt tin (Sn) over copper alloy and is backwards compatible with current standard SnPb low-temperature reflow processes as well as higher temperature (260°C reflow) "Pb Free" processes.

Ordering Information

Part Number for Ordering	Description
CGB7001-BD	Bare die in GelPak
CGB7001-SC-0G00	Matte Tin plated RoHS compliant SOT-89 surface mount package in bulk quantity
CGB7001-SC-0G0T	Matte Tin plated RoHS compliant SOT-89 surface mount package in tape and reel
CGB7001-SP-0G00	Matte Tin plated RoHS compliant SOT-86 surface mount package in bulk quantity
CGB7001-SP-0G0T	Matte Tin plated RoHS compliant SOT-86 surface mount package in tape and reel
PB-CGB7001-SC-0000	Evaluation Board for SOT-89 packaged device with SMA connectors
PB-CGB7001-SP-0000	Evaluation Board for SOT-86 packaged device with SMA connectors

We also offer the plastic packages with SnPb (Tin-Lead) or NiPdAu plating. Please contact your regional sales manager for more information regarding different plating types