



CHENMKO ENTERPRISE CO.,LTD

CH751H-40PT

Lead free devices

SURFACE MOUNT

SCHOTTKY BARRIER DIODE

VOLTAGE 40 Volts CURRENT 0.03 Ampere

APPLICATION

- * High speed switching for detection

FEATURE

- * Small surface mounting type. (SC-76/SOD-323)
- * Low VF and low IR
- * High reliability

CONSTRUCTION



- * Silicon epitaxial planar

MARKING

- * JV



SC-76/SOD-323



Dimensions in millimeters

SC-76/SOD-323

CIRCUIT



MAXIMUM RATINGS (At $T_A = 25^{\circ}\text{C}$ unless otherwise noted)

RATINGS	SYMBOL	CH751H-40PT	UNITS
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	40	Volts
Maximum RMS Voltage	V_{RMS}	28	Volts
Maximum DC Blocking Voltage	V_{DC}	40	Volts
Maximum Average Forward Rectified Current	I_O	0.03	Amps
Peak Forward Surge Current at 8.3 mSec single half sine-wave	I_{FSM}	0.2	Amps
Typical Junction Capacitance between Terminal (Note 1)	C_J	2.0	pF
Maximum Operating Temperature Range	T_J	+125	$^{\circ}\text{C}$
Storage Temperature Range	T_{STG}	-40 to +125	$^{\circ}\text{C}$

ELECTRICAL CHARACTERISTICS (At $T_A = 25^{\circ}\text{C}$ unless otherwise noted)

CHARACTERISTICS	SYMBOL	CH751H-40PT	UNITS
Maximum Instantaneous Forward Voltage at $I_F = 1\text{mA}$	V_F	0.37	Volts
Maximum Average Reverse Current at $V_R = 30\text{V}$	I_R	0.5	μAmps

NOTES : 1. Measured at 1.0 MHz and applied reverse voltage of 1.0 volts.
2. ESD sensitive product handling required.

2001-6

RATING CHARACTERISTIC CURVES (CH751H-40PT)

FIG. 1 - FORWARD CHARACTERISTICS

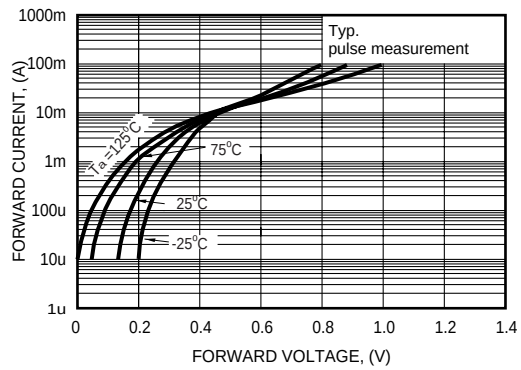


FIG. 2 - REVERSE CHARACTERISTICS

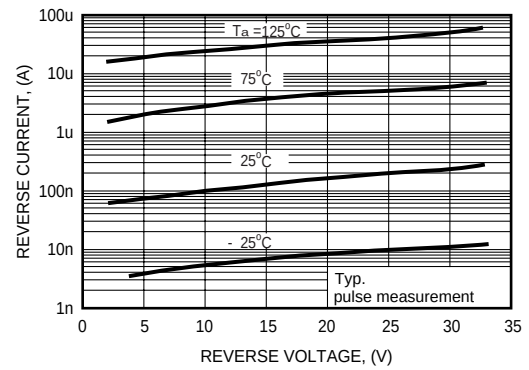


FIG. 3 - TYPICAL JUNCTION CAPACITANCE

