
TO-92 Encapsulate Adjustable Reference Source

CJ431K Adjustable Accurate Reference Source

TO-92

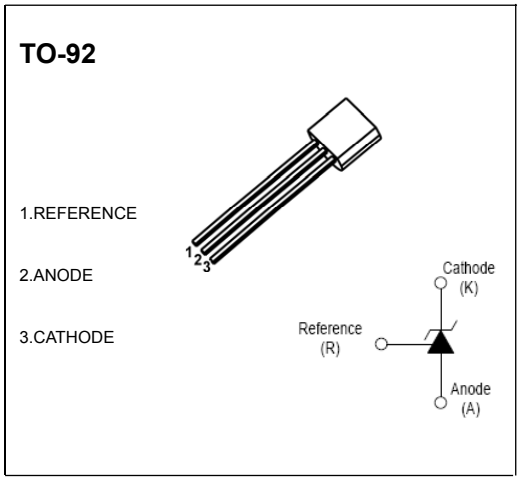

FEATURES

- The output voltage can be adjusted to 36V
- Low dynamic output impedance ,its typical value is 0.2Ω
- Trapping current capability is 1 to 100mA
- The typical value of the equivalent temperature factor in the whole temperature scope is 50 ppm/℃
- The effective temperature compensation in the working range of full temperature
- Low output noise voltage
- Fast on-state response
- ESD protected up to 2KV

ABSOLUTE MAXIMUM RATINGS (Operating temperature range applies unless otherwise specified)

Parameter	Symbol	Value	Units
Cathode Voltage	V_{KA}	37	V
Cathode Current Range (Continuous)	I_{KA}	-100-+150	mA
Reference Input Current Range	Iref	0.05-+10	mA
Power Dissipation	P_D	770	mW
Thermal Resistance from Junction to Ambient	$R_{\theta JA}$	162	℃/W
Operating temperature	T_{opr}	-40~+85	℃
Storage temperature Range	Tstg	-65~+150	℃

ELECTRICAL CHARACTERISTICS (Ta=25℃ unless otherwise specified)

Parameter	Symbol	Test conditions		Min	Typ	Max	Unit
Reference input voltage (Fig.1)	V_{ref}	$V_{KA}=V_{REF}$, I_{KA}=10mA		2.445		2.545	V
Deviation of reference input voltage over temperature (note) (Fig.1)	$\triangle V_{ref}/\triangle T$	$V_{KA}=V_{REF}$, I_{KA}=10mA Tmin≤Ta≤Tmax			4.5	17	mV
Ratio of change in reference Input voltage to the change in cathode voltage (Fig.2)	$\triangle V_{ref}/\triangle V_{KA}$	I_{KA}=10mA	$\triangle V_{KA}$ =10V~V_{REF}		-1.0	-2.7	mV/V
			$\triangle V_{KA}$ =36V~10V		-0.5	-2.0	mV/V
Reference input current (Fig.2)	I_{ref}	I_{KA}= 10mA,R_1=10kΩ R_2=∞			1.5	4	μA
Deviation of reference input current over full temperature range (Fig.2)	$\triangle I_{ref}/\triangle T$	I_{KA}=10mA, R_1=10kΩ R_2=∞ T_A=full Temperature			0.4	1.2	μA
Minimum cathode current for regulation (Fig.1)	$I_{KA(min)}$	$V_{KA}=V_{REF}$			0.45	1.0	mA
Off-state cathode current (Fig.3)	$I_{KA(OFF)}$	V_{KA}=40V ,V_{REF}=0			0.05	0.5	μA
Dynamic impedance	Z_{KA}	$V_{KA}=V_{REF}$, I_{KA}=1 to 100mA f≤1.0kHz			0.15	0.5	Ω

Note:T_{MIN}=0℃ ,T_{MAX}=+70℃

CLASSIFICATION OF V_{ref}

Rank	0.5%	1%
Range	2.482-2.508	2.47-2.52