
NOTES:
1. MOUNTING: MOUNTS IN A ∅.250" ±.002 [∅6.35mm ±.05] PANEL HOLE ON .375 [9.5mm] CENTERS
2. PANEL THICKNESS: .031[.8mm] TO .125 [3.18mm]
3. PANEL HOLE SHALL BE DEBURRED, BUT NOT CHAMFERED
4. ASSEMBLY: INSERT CLIP MOUNT THROUGH PANEL HOLE. INSERT LED THROUGH CLIPMOUNT. SLIDE SPACER OVER CLIPMOUNT.
5. U.S. AND FOREIGN PATENT ISSUED


REVISIONS				
ECN#	REV.	DESCRIPTION	DATE	INITIALS
	1	CHG PART NO. AND DWG NO.	3-1-90	JS
	001	REVISED PER ECR111009AZ01	6-20-10	SMU
308	002	REVISED PER ECR 050311ED02	5-26-11	KH




SPACER
(ORDER SEPERATELY)




SPC 125



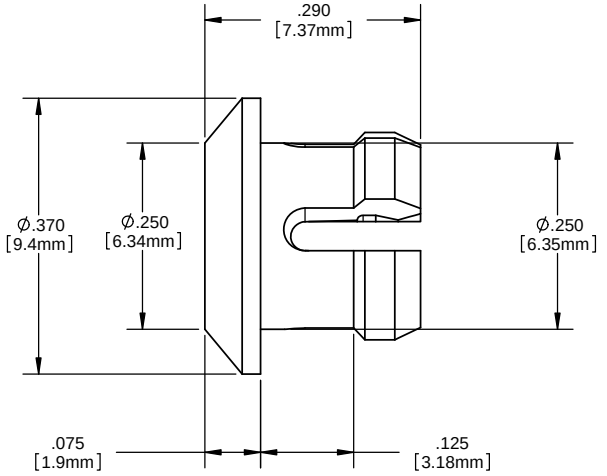

ORDERING CODE : **CLP 127 BLK**



ASSEMBLY

DIMENSION STYLE: INCHES [MM]
GENERAL TOLERANCES UNLESS OTHERWISE SPECIFIED

	INCHES	MM
.X	± .020	± .508
.XX	± .010	± .254
.XXX	± .005	± .127
ANGLE	± 1°	

BREAK ALL CORNERS AND SHARP EDGES .030 MAX

THIRD ANGLE PROJECTION

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VISUAL COMMUNICATIONS COMPANY, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF VISUAL COMMUNICATIONS COMPANY, INC IS PROHIBITED.

APPROVAL		DATE
DRAWN	SMU	6-20-10
CHECKED	DPZ	6-20-10

MATERIAL: POLYCARBONATE, BLACK UL 94-V2

FINISH: SEE NOTES

DO NOT SCALE DRAWING

VCC OPTOELECTRONICS
190 BOSSTICK BLVD. SUITE 101 SAN MARCOS, CA 92069 U.S.A
PHONE: (760) 560-1300, FAX: (760) 560-1301 EMAIL: vccsales@vcclite.com

TITLE: CLIPLITE® CLP 127 MOUNT

SIZE	DWG. NO.	REV
B	CLP 127 BLK	002

SCALE: 6:1 | SHEET 1 OF 1