
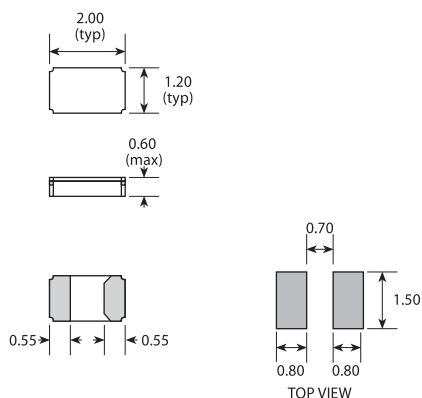


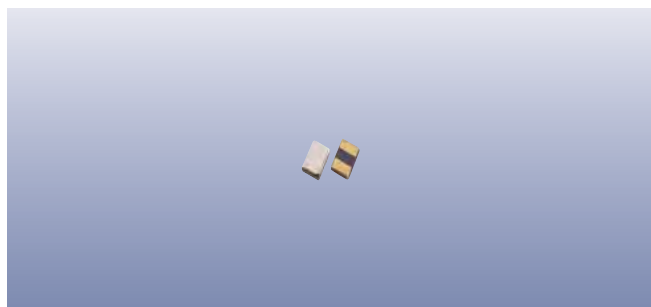

Features

- ▶ Ultra low profile - 0.6mm high
- ▶ High shock & vibration resistance
- ▶ Extended temperature range option
- ▶ AEC-Q200 Automotive option
- ▶ Low power consumption

Specifications

Parameters	Product	Option Code
	CM8V	
Terminations:	Gold plated pads	■ T1A
Frequency range:	32.768kHz	■
Calibration tolerance:	±20ppm ±100ppm	■ □ specify
Operating temperature range:	-40 to +85°C -40 to +125°C	■ □ E
Storage temperature range:	-55 to +125°C	■
Circuit condition:	4pF 6pF 7pF 9pF 12.5pF	□ □ □ □ □ specify specify specify specify
Static capacitance (C ₀):	1.1pF typ	■
Motional capacitance (C ₁):	3.7fF typ	■
Equivalent series resistance:	55kΩ typ, 75kΩ max	■
Ageing:	±3ppm max first year	■
Drive level:	0.5μW max	■
Turnover temperature (T ₀):	+25°C ±5°C	■
Frequency / temp coefficient:	-0.035ppm/°C ² typ	■
Shock resistance:	±5ppm, 5,000g, 0.3ms, ½ sine	■
Vibration resistance:	±5ppm, 20g, 10.0 ~ 2,000Hz	■
Soldering condition:	Reflow, 260°C, 20 sec max	■
Qualification:	Commercial AEC-Q200 (Automotive)	■ □ A

■ Standard. □ Optional - Please specify required code(s) when ordering

Ordering Information

Product name + termination + option codes (if any) + frequency + calibration tolerance + circuit condition

eg: **CM8V-T1A 32.768kHz ±20ppm 12.5pF** -40+85°C

CM8V-T1A/EA 32.768kHz ±100ppm 9pF -40+125°C, AEC-Q200

Option code X (eg CM8V-T1A/X) denotes a custom spec.

- ♦ Available on T&R 1k, 3k or 14k pcs/reel.
- ♦ Refer to our website for T&R and soldering details.
- ♦ Ask about higher shock & vibration specifications.