CMD102
PCS B-Band Duplexer
with monitor port

Receive Channel		Transmit Channel	
Passband:	**1870 - 1885 MHz**	**Passband:**	**1950 - 1965 MHz**
Insertion Loss:	**0.8 dB max.**	**Insertion Loss:**	**0.8 dB max.**
Return Loss:	**15.0 dB min.**	**Return Loss:**	**15.0 dB min.**
Rejection:		**Rejection:**	
1950 - 1965 MHz	**75 dB min**	**1870 - 1885 MHz**	**75 dB min.**
Isolation Tx to Rx:	**75 dB min.**	**Isolation Rx to Tx:**	**75 dB min.**
Monitor Port:	**-40 dB +/- 1 dB**	**Power:**	**200 Watts CW.**

Operation Temp:	**0° to +60°C**
Storage Temp:	**-40° to +85°C**

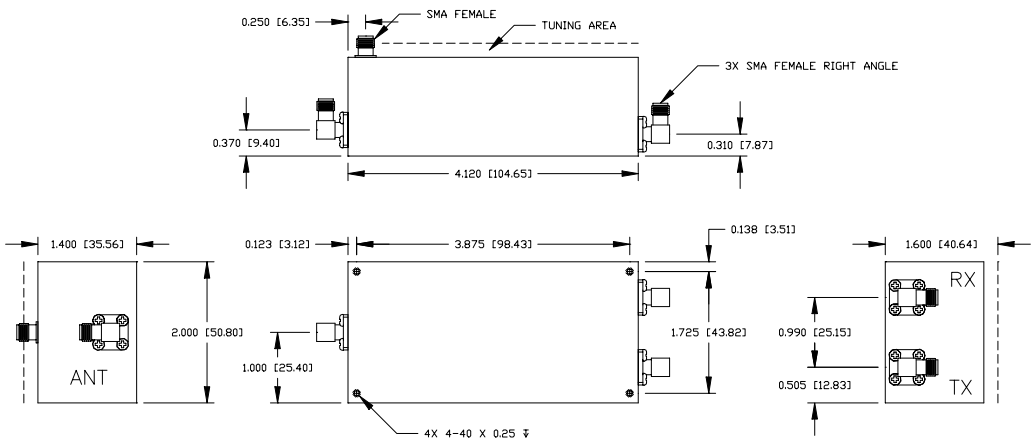

Commercial Microwave Technology, Inc.
11335 Sunrise Gold Circle, Rancho Cordova, CA 95742
Phone: 916-631-4363 • Fax: 916-631-4364
www.cmtfilters.com