
KOA SPEER ELECTRONICS, INC.

CN-KRT

anti sulfuration chip networks (convex termination)

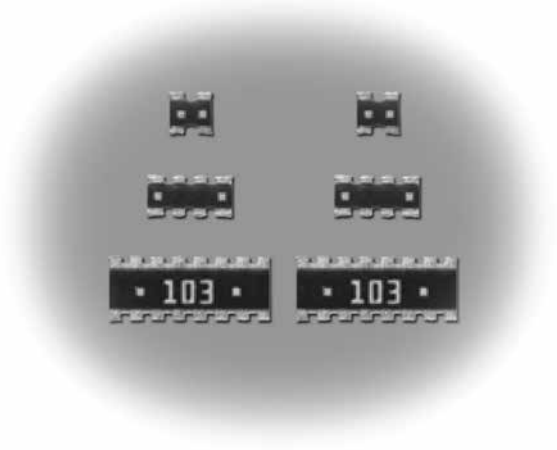


features

- Excellent anti-sulfuration characteristic due to using high sulfuration-proof inner top electrode material
- More advancement in the mounting density than individual chip resistors
- Mounting cost reduction by decreasing the number of parts mounting times
- Easy soldering fillet inspection
- Suitable for an image recognition mounter due to square corner design
- Marking: Black body color
- Products with lead-free termination meet EU RoHS requirements. EU RoHS regulation is not intended for Pb-glass contained in electrode, resistor element and glass.

EU RoHS COMPLIANT

dimensions and construction

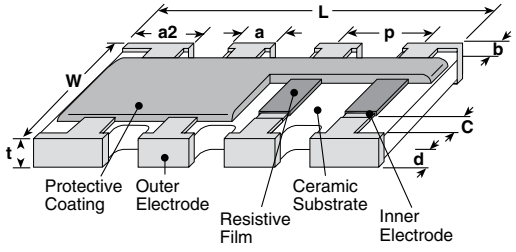

	Type	Dimensions inches (mm)								
		L	W	c	d	t	a	a2	b	P*
	CN1E2KRT (0402x2)	.039±.004 (1.0±0.1)	.039±.004 (1.0±0.1)	.006±.004 (0.15±0.1)	.010±.004 (0.25±0.1)	.014±.004 (0.35±0.1)	.013±.004 (0.33±0.1)	—	.007±.002 (0.17±0.05)	.026 (0.67)
	CN1E4KRT (0402x4)	.079±.004 (2.0±0.1)	.039±.004 (1.0±0.1)	.006±.004 (0.15±0.1)	.010±.008 (0.25±0.2)	.014±.004 (0.35±0.1)	.012±.006 (0.3±0.15)	.016±.006 (0.4±0.15)	.006±.004 (0.15±0.1)	.020 (0.5)
NEW	CN1F8KRT (0602x8)	.150±.004 (3.8±0.1)	.063±.004 (1.6±0.1)	.012±.004 (0.3±0.1)	.012±.004 (0.3±0.1)	.018±.004 (0.45±0.1)	.012±.004 (0.3±0.1)	—	.006* (0.15)	.020 (0.5)

* Referential values.

ordering information

CN	1E	4	K	RT	TD	103	J
Type	Size	Number of Resistors	Terminal Convex	Termination Material	Packaging	Nominal Resistance	Tolerance
	1E NEW 1F	2 4 8	K: Convex type with squared corners	RT: Sn	TD: Paper	3 digits	J: ±5%

applications and ratings

Part Designation	Power Rating per Element	Resistance Range J: ±5 E24	T.C.R. (×10⁻⁶/K)	Max. Working Voltage	Max. Overload Voltage	Rated Ambient Temperature	Operating Temperature Range	Taping & Q'ty/Reel (pcs)
								TD
CN1E2KRT	0.063	3~1M	±200: R≥10Ω ±400: R<10Ω	25V	50V	+70°C	−55°C~+125°C	10,000
CN1E4KRT								
CN1F8KRT	0.063*	10~1M						5,000

Please note that network resistors generate higher heat rather than single flat chip resistor even under rated power output.
*** 0.25W per package**


Rated voltage = $\sqrt{\text{Power Rating} \times \text{Resistance value}}$ or Max. working voltage, whichever is lower.

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use. 11/30/14

environmental applications


Circuit Construction

CN1E2KRT




$R_1=R_2$

CN1E4KRT




$R_1=R_2=R_3=R_4$

CN1F8KRT

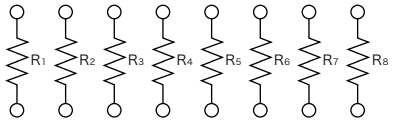

$R_1=R_2=R_3=R_4=R_5=R_6=R_7=R_8$

Derating Curve

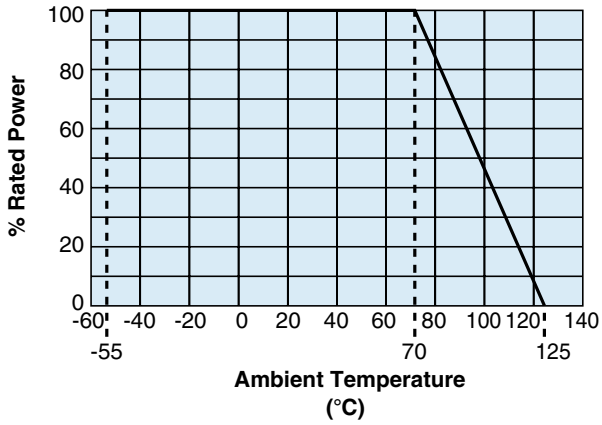

For resistors operated at an ambient temperature of 70°C or above, a power rating shall be derated in accordance with the above derating curve.

Performance Characteristics

Parameters	Performance Requirements ΔR±%		Test Methods
	Limit	Typical	
Resistance	Within specified tolerance	—	25°C
T.C.R.	Within specified T.C.R.	—	+25°C/–55°C and +25°C/+125°C
Overload (Short time)	2	0.25	Rated voltage × 2.5 for 5 seconds
Resistance to Soldering Heat	1	0.75	260°C ± 5°C, 10 seconds ± 1 second
Rapid Change of Temperature	1	0.5	–55°C (30 minutes) / +125°C (30 minutes) 5 cycles
Moisture Resistance	5	1	40°C ± 2°C, 90%~95%RH, 1000 hours 1.5 hr ON / 0.5 hr OFF cycle
Endurance at 70°C	5	0.5	70°C ± 2°C, 1000 hours 1.5 hr ON / 0.5 hr OFF cycle
High Temperature Exposure	1	0.15	+125°C, 1000 hours
Sulfuration Test	5	—	Soaked in industrial oil with 3.5% sulfur concentration 105°C ± 3°C, 500 hours

Circuit Board Application

