



Helping Customers Innovate, Improve & Grow

Search

Go


[XOs](#) > [CO-432/452](#)**CO-432 / 452 ECL / PECL Clock Oscillators****Features:**

- Frequencies from 5 MHz to 200 MHz
- Low Profile 14 Pin Dip
- 10K, 10KH, 100K, ECLinPS, 10E/EL and 100E/EL Logic
- CO431 Available as QPL to MIL-0-55310/25B


SPECIFICATIONS		
Part	CO-432	CO-452
Series	14 Pin Dip	
Frequency	5 MHz-200 MHz	
Output	Output taken directly from 10K, 10KH, ECLinPS or ECLinPS Lite gate, depending on temperature and frequency range. Complementary outputs optional.	Output taken directly from 100K, ECLinPS or ECLinPS Lite gate, depending on temperature and frequency range. Complementary outputs optional.
Supply	-5.2 Vdc $\pm$ 5% <45 mA to 110 MHz <70 mA above 110 MHz	-4.5 Vdc $\pm$ 5% at <60 mA
Accuracy (at 25°C)	CO-432C: $\pm$ 25 ppm	CO-452C: $\pm$ 25 ppm
Temperature Stability	STANDARD: 0°C to +70°C: $\pm$ 25 ppm Option 1: -55°C to +85°C: $\pm$ 50 ppm Option 2: -55°C to +125°C: $\pm$ 50 ppm Option 5: 0°C to +50°C: $\pm$ 5 ppm Option 6: 0°C to +50°C: $\pm$ 10 ppm *Option 7: -55°C to +125°C: $\pm$ 100 ppm *-1,-2,-7 restricted to -30/+85°C above 110 MHz in CO-233ME	
Improved accuracy/stability available on some models. For example, for $\pm$ 7 ppm over 0°C to +50°C and for $\pm$ 10ppm over 0°C to +70°C. Improvement is also available over wider temperature ranges. Please contact factory.		
Aging Rate (typical after 30 days)	3 ppm first year 2 ppm/year thereafter	3 ppm first year <2 ppm/year thereafter

[top of page](#)**How to Order Hybrid XO's - CO-400 Series**

(Note: Not all combinations possible. See above for appropriate options.)

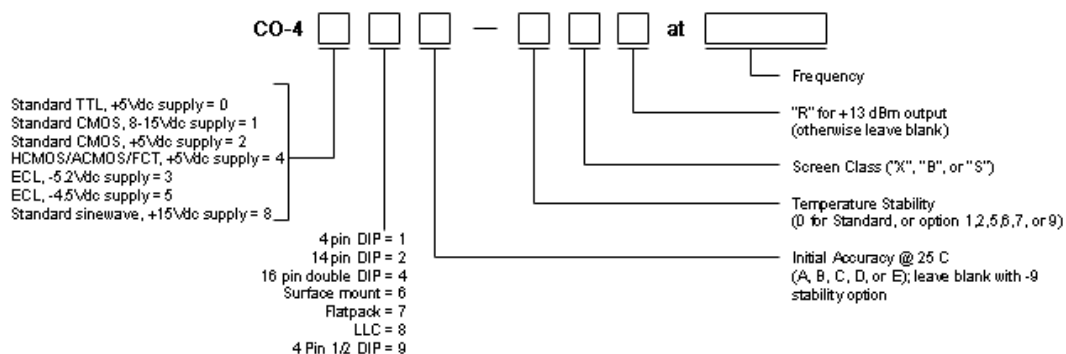

SCREEN TESTING OF ABOVE MODELS					
SCREEN TEST	MIL-STD-883 METHOD	Standard CLASS X	Options CLASS D CLASS B CLASS S		
Stabilization Bake (150°C)	—	X	X	X	Class S screen test requirements include 24 hour additional bake-out, 80 hour additional burn-in, thermal shock, PIND test and radiographic inspection in addition to Class B Screening. Has major cost impact.
Seal Test (Gross and Fine)	1014, Cond A2	X	X	X	
Temperature Cycling (Thermal Shock)	1010, Cond B		X	X	
Burn-in, operating 160 hours @125°C	—		X	X	
Acceleration (5000g in Y ₁ axis)	2001, Cond A			X	

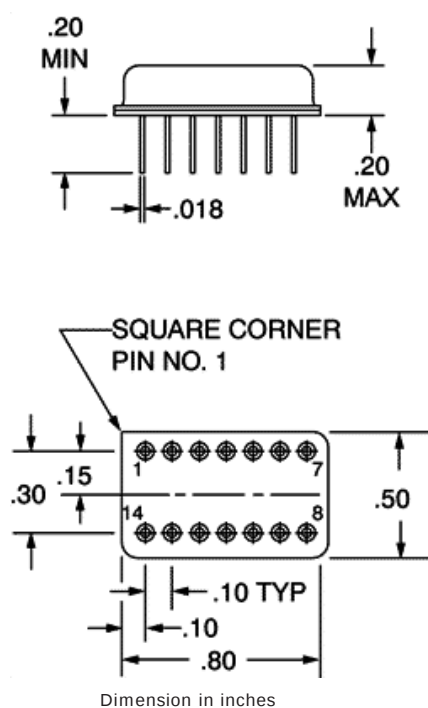[top of page](#)


Pinouts

Pin	Function
7	Supply (-)
8	Output
14	OV, case
Other	*N/C

* Unlisted pins may be used internally

#For external tuning, "E" accuracy, connect variable capacitor with nominal range of 5-30 pF from pin 2 to pin 3.

[top of page](#)