IrDA COMMUNICATION ADAPTOR

(PC Configurator use)

Functions & Features

• Communication adaptor used to configure M-System's products equipped with an IrDA port (e.g. model 71VR1, SC100) from a PC
• USB connection to the PC

MODEL: COP-IRDA[1]

ORDERING INFORMATION

• Code number: COP-IRDA[1]
Specify a code from below for [1].
(e.g. COP-IRDA/C144)

[1] OPTIONS

Holder (must be specified)

/CL: Adaptor with L Type holder
/C96: Adaptor with holder for 96 mm height
/C144: Adaptor with holder for 144 mm height
/C: Adaptor only
/NL: L Type holder only
/N96: Holder (for 96 mm height) only
/N144: Holder (for 144 mm height) only

OPTIONS	AVAILABLE MODELS
/C96 /N96	71VR
/C144 /N144	SC100 SC200 SC110 SC210

RELATED PRODUCTS

• Driver software
Software downloadable at M-System's web site.

GENERAL SPECIFICATIONS

Connection: USB Type A connector
Housing material: Resin (black)

COMMUNICATION

Standard: USB, IrDA
IrDA communication distance: Max. 20 cm

CONNECTED DEVICE


USB: PC/AT compatible
OS (Windows 10 (32-bit, 64-bit), Windows 7 (32-bit, 64-bit), Windows Vista (32-bit), Windows XP)
IrDA: M-System's related IrDA products.

INSTALLATION

Supply voltage: 4.75 – 5.25 V DC, approx. 100mA (supplied through USB port)
Operating temperature: -5 to +60°C (23 to 140°F)
Operating humidity: 30 to 90 %RH (non-condensing)
Weight:
/CL: 110g (3.9 oz)
/C96: 100g (3.5 oz)
/C144: 160g (5.6 oz)
/C: 60g (2.1 oz)
/NL: 50g (1.8 oz)
/N96: 40g (1.4 oz)
/N144: 100g (3.5 oz)


DIMENSIONS unit: mm (inch)

■ **COMMUNICATION ADAPTOR**

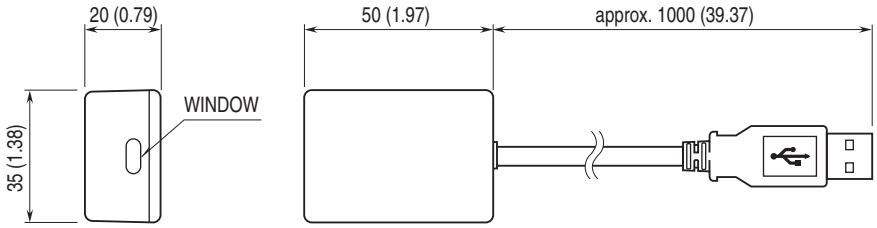


■ **HOLDER**


• **L Type**

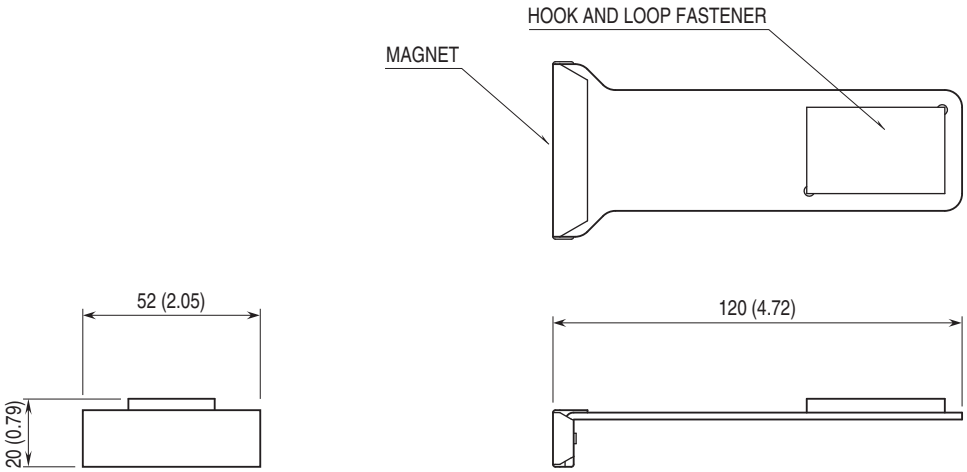

• **For 96mm (3.78)**

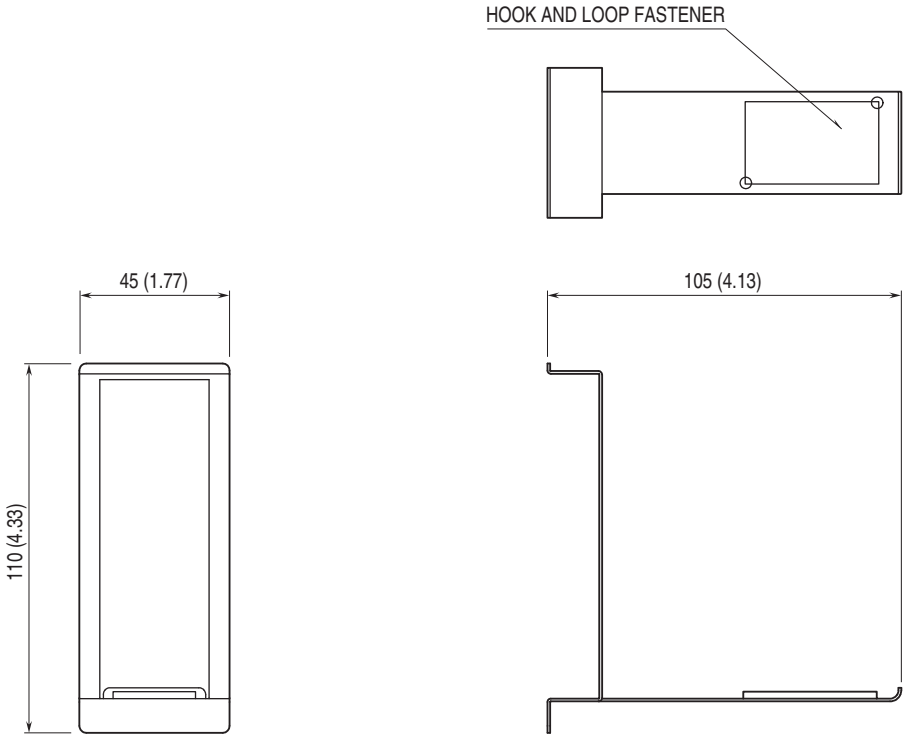

• For 144mm height

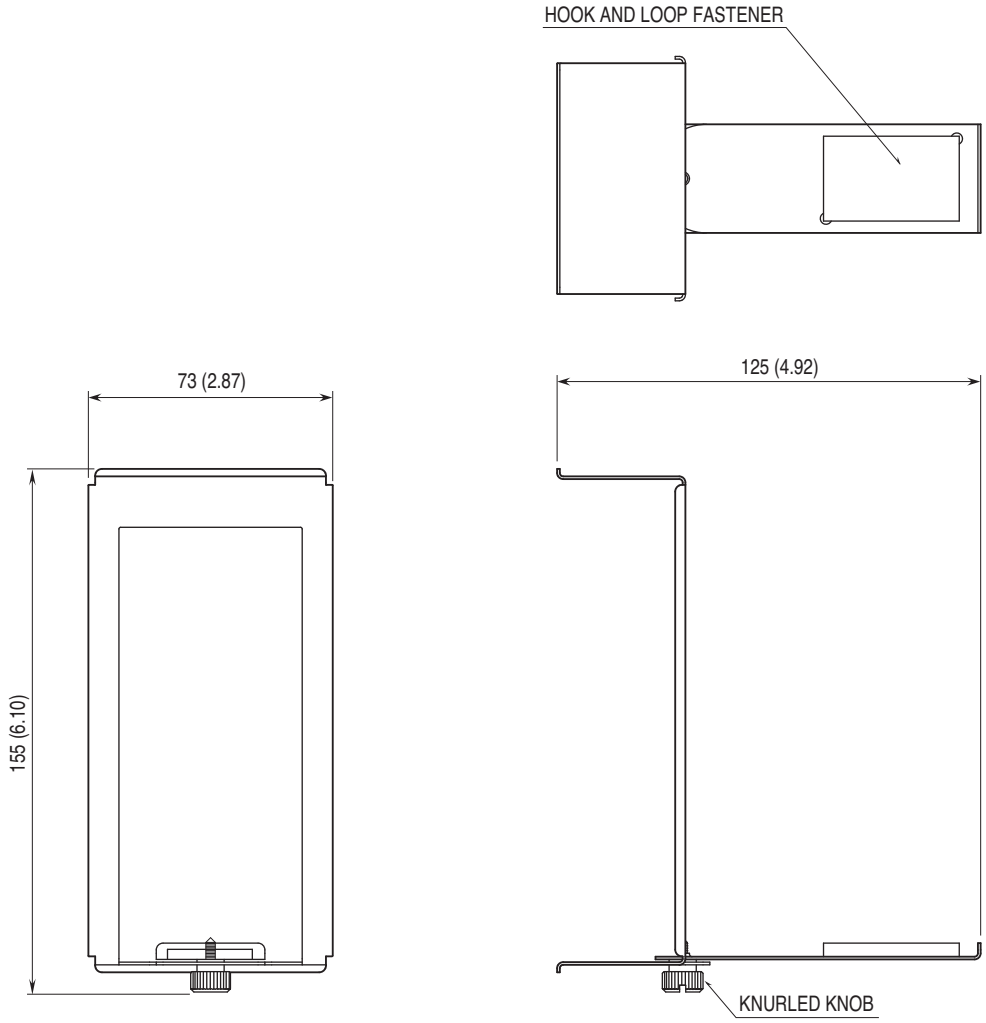

⚠ Specifications are subject to change without notice.