


cPCIS-2630/cPCIS-2830


3U CompactPCI® Subsystem with 8-slot Backplane and 400 W ATX Power Supply

Features

- 3U CompactPCI® backplane with seven peripheral slots and one system slot
- Temperature, voltage, and fan monitoring LEDs
- Supports rear I/O backplane with P2 connectors for cPCI 50mm/80mm depth RTMs
- Temperature, voltage, and fan monitoring LEDs
- Hot-swappable cooling fans & filter
- 400 W ATX Power supply

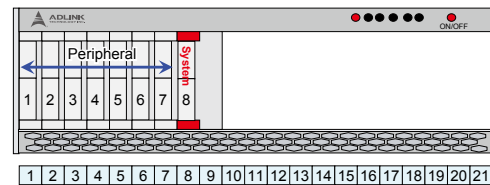

cPCIS-2630R/cPCIS-2830R Inside Front View

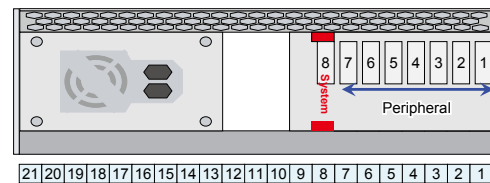

cPCIS-2630R/cPCIS-2830R Inside Rear View

Ordering Information

Model Name	System	Peripheral	Rear	Alarm Module	PSU QTY	PSU MAX	PICMG®
cPCIS-2630/cPCIS-2830	1	7	1 *system slot only	Yes	1	400 W	2.0, 2.1
cPCIS-2630R/cPCIS-2830R	1	7	8	Yes	1	400 W	2.0, 2.1


Note: All models above do not include any system or peripheral boards.

cPCIS-2632/cPCIS-2832


3U CompactPCI® Subsystem with 8-slot Backplane and 1 + 1 CompactPCI® Redundant Power Modules

Features

- 3U CompactPCI® backplane with seven peripheral slots and one system slot
- Temperature, voltage, and fan monitoring LEDs
- Supports current sharing on +5 V, +3.3 V, and +12 V
- 1 + 1 hot swappable 250 W + 250 W CompactPCI® power supplies
- PICMG® 2.11 47-pin power interface
- Hot-swappable cooling fans & filter
- Supports rear I/O backplane with P2 connectors for cPCI 50mm/80mm depth RTMs

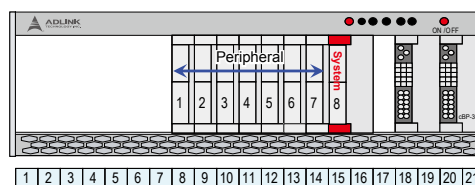

cPCIS-2632R/cPCIS-2832R Inside Front View

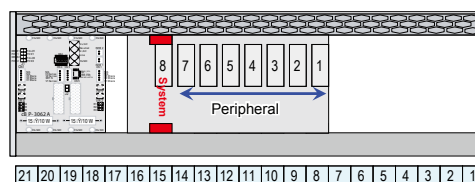

cPCIS-2632R/cPCIS-2832R Inside Rear View

Ordering Information

Model Name	System	Peripheral	Rear	Alarm Module	PSU QTY	PSU MAX	PICMG®
cPCIS-2632/cPCIS-2832	1	7	1 *system slot only	Yes	2	500 W (1 + 1)	2.0, 2.1, 2.11
cPCIS-2632R/cPCIS-2832R	1	7	8	Yes	2	500 W (1 + 1)	2.0, 2.1, 2.11

Note: All models above do not include any system or peripheral boards.