

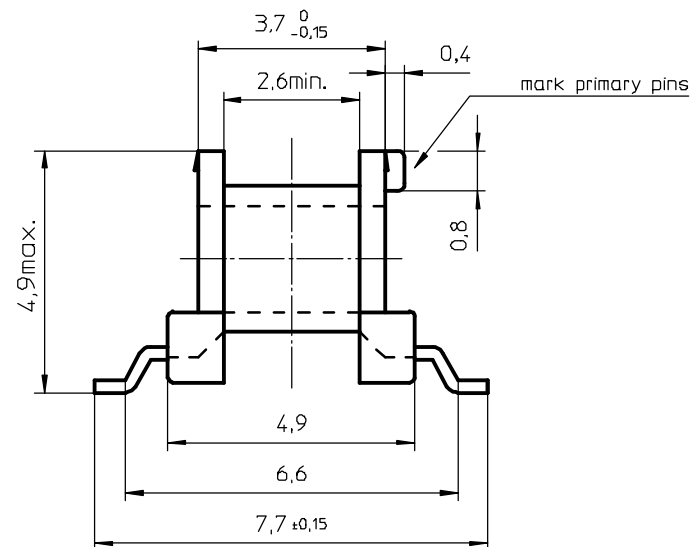


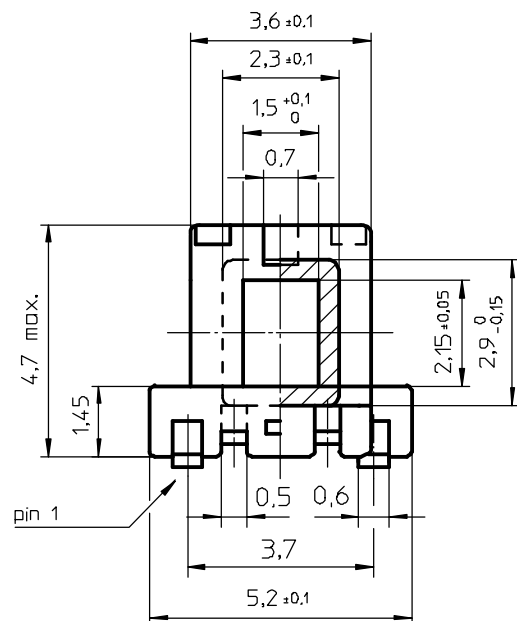

PROPOSED PAD ARRANGEMENT

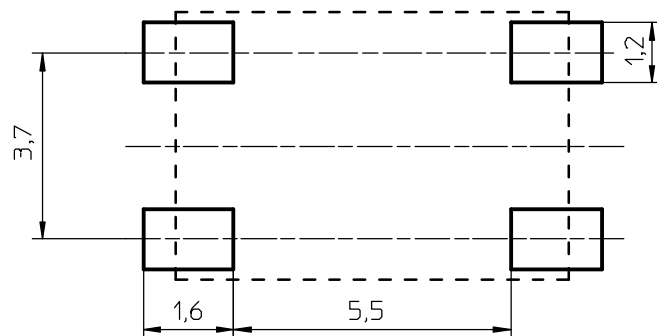

Coil former material:

Sumikasuper E4008 (LCP), glass-reinforced.

UL file number: E54705 - UL94V-0

Pin material:

CuSn - Ni flash, Sn plated.

Max operating temp:

acc. to IEC 60085 class F, 155°C.

Resistance to soldering heat:

acc. to IEC 60068-2-20 Part 2, Test Tb, method 1B, 350°C - 3,5sec.

Solderability:

acc. to IEC 60068-2-20 Part 2, Test Ta, method 1, 235°C - 2sec.

Min. winding area:

1,5 mm².

Mean length of turn:

12,6 мм.

CLASSNO.		CPHS-E5.3/2-1S-4P-Z		4322 021 06001		03-02-20	
NAME NOAH		J. Tjon		SUPERS VERV.		1 SH B. INT	
MPA		CHECK CONT.		DAT.		112 - 001 069	
		03-02-20		Property of Eigen van		© FERROXCUBE 2000	
						A3	