

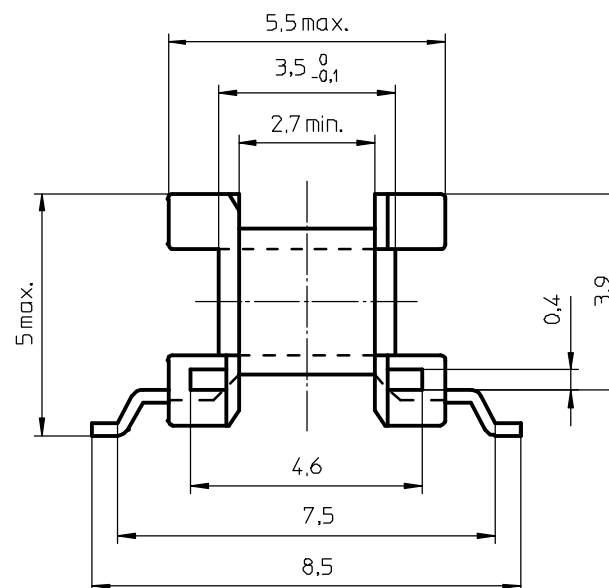


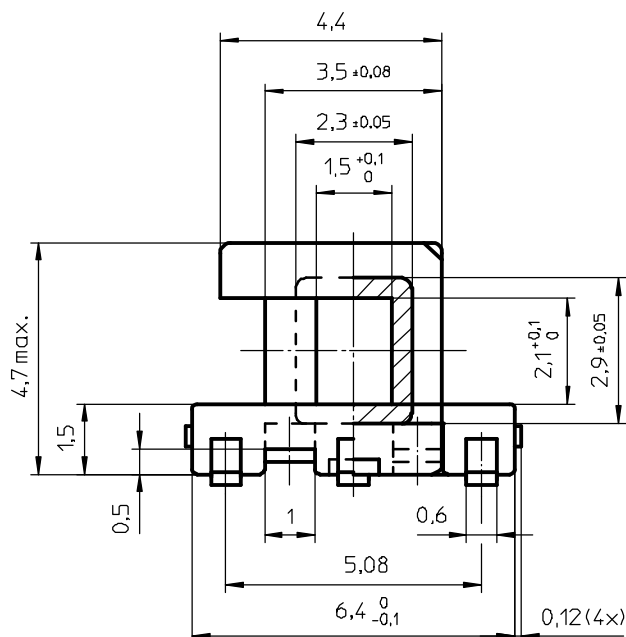

PROPOSED PAD ARRANGEMENT

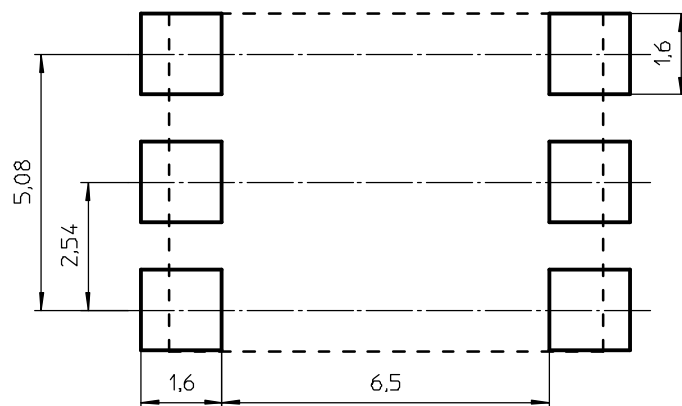

Coil former material: Sumikasuper E4008 (LCP), glass-reinforced.
 UL file number: E54705 - UL94V-0
 Pin material: CuSn - Ni flash, Sn plated.
 Max. operating temp.: acc. to IEC 60085 class F, 155°C.
 Resistance to soldering heat: acc. to IEC 60068-2-20 Part 2, Test Tb, method 1B, 350°C - 3.5sec.
 Solderability: acc. to IEC 60068-2-20 Part 2, Test Ta, method 1, 235°C - 2sec.
 Min. winding area: 1.6 mm²
 Mean length of turn: 12.8 mm.

CLASS NO.		CPHS-E6.3/2-1S-6P-Z		4322 021 06041		03-02-20	
NAME	M. Veekens	SUPERS	VERV.	1	SP	112 - 001	069
MPA	CHECK	CONTR.	DAT.	03-02-20	Property of	Eligende van	© FERROXCUBE 2000
						A3	