

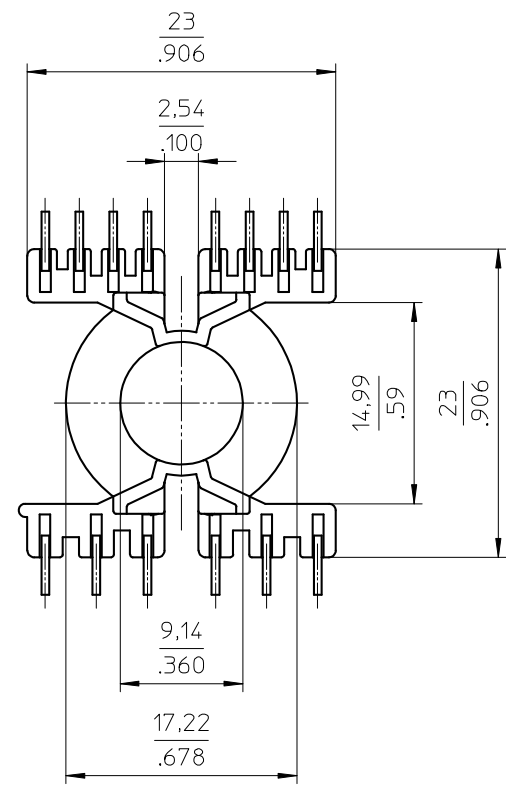
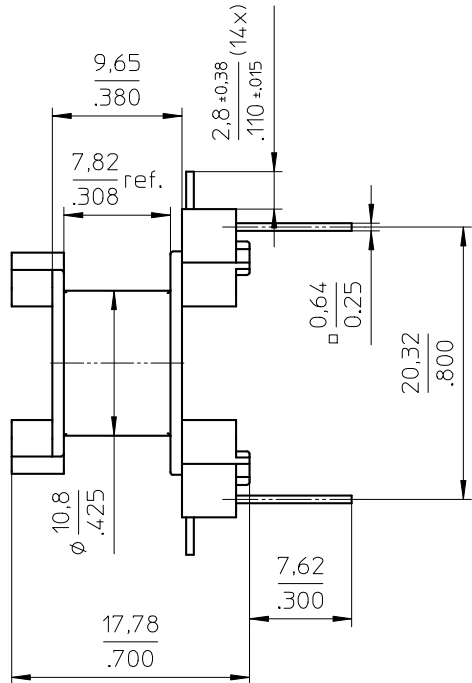


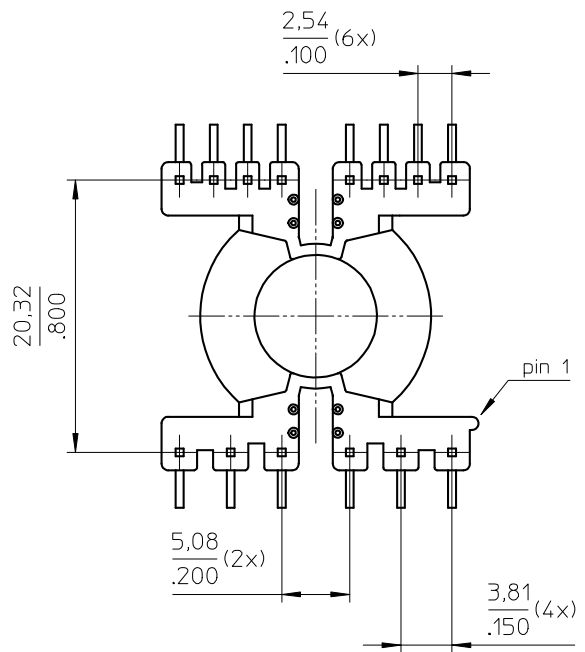

Grid pattern

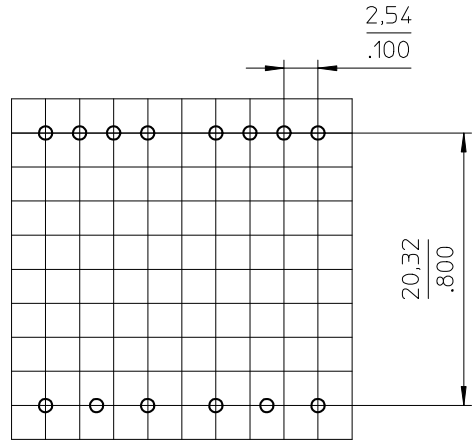

Coil former material: Rynite FR530 (PET), glass-reinforced, (color black)
UL file number: E41938 - UL94V-0.

max. operating temp: 180°C, class H

pin material: Copper-plated steel wire, Sn plated.

solderability: acc. to IEC 60068-2-20 part2, Test Ta method 1, 235C-2sec.

mean length of turn: 1.733 inch

winding area: 0.04 sq. inch.

CLASSNO.		CPV-PQ20/16-1S-14PD-Z		4335 060 26721		02-06-06
NAME	A.Wojtasz	SUPERS.				03-01-13
VER.		VER.				05-06-05
MPA		CHECK				07-05-29
CONTR.		DAT.	01-06-01	Property of	© FERROXCUBE 2000	07-09-03
				Eigendom van		A3