
Technical Specification

ENERGY VERY ENDURE


# CR1616

Manganese Dioxide
Lithium Coin Batteries

Dimensions(mm)




## TEMPERATURE CHARACTERISTICS

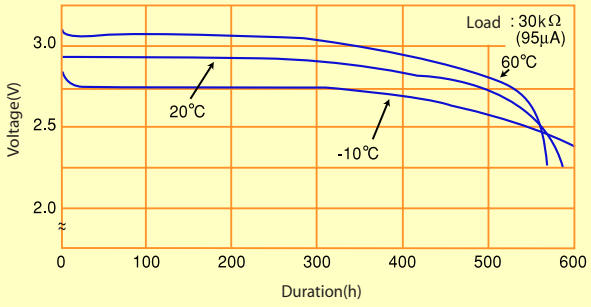



## SPECIFICATION

| | |
|---|---|
| Nominal voltage (V) | 3 |
| Nominal capacity (mAh) | 50 |
| Continuous standard load (mA) | 0.1 |
| Operating temperature ( ℃ ) | -20 ~ +60 |
| Weight(g) | 1.2 |

## OPERATING VOLTAGE VS. LOAD RESISTANCE


(voltage at 50% discharge depth)

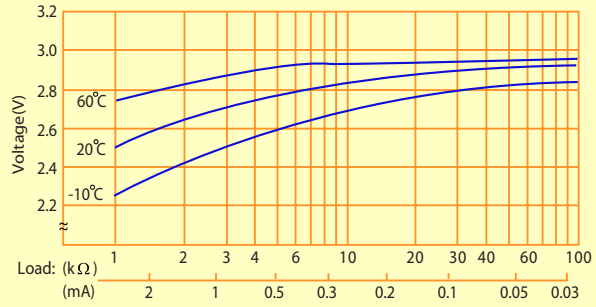


## WARNING:

- Forbid short-circuit, charge between"+" and"-".
- Forbid over-discharge, fire, damage.
- Finish sealing less more 5 seconds at 200℃~250℃.
- Take out the battery when discharging to cut-off voltage, and embedding it under the ground or jump in the deep water.

## CAPACITY VS. LOAD RESISTANCE

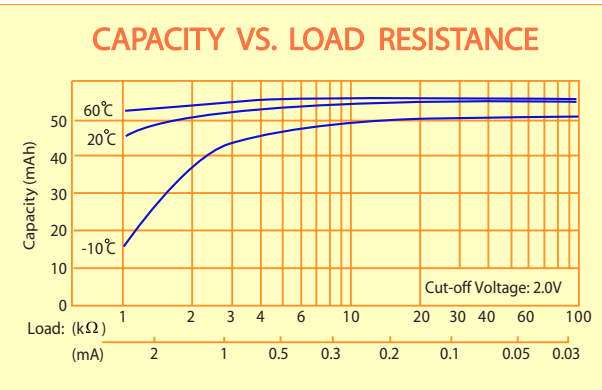


**EVE BATTERY CO., LTD.**
Tel:+86-752-260 1898 +86-752-260 1128 Fax: +86-752-260 6033
http:// www. evebattery.com Email: sales@evebattery.com