
EVEREADY BATTERY CO. 1-800-383-7323 / USA
Internet: www.energizer.com 1-800-383-7323 / CANADA
+ 44 (0) 208 920 2306 / EUROPE

ENERGIZER NO. CR1632




Industry Standard Dimensions in mm (inches)

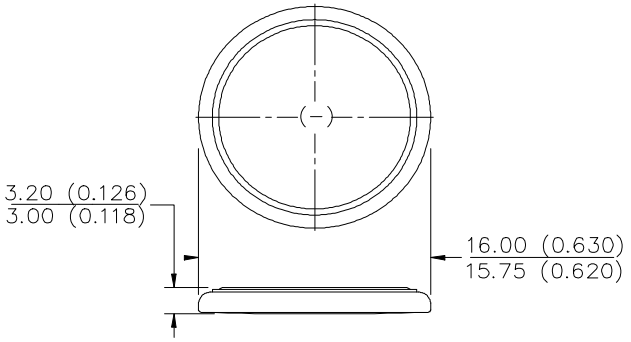

Chemical System: Lithium / Manganese Dioxide (Li/MnO_2)

Battery Voltage: 3.0 Volts
Average Weight: 1.8 grams (0.06 oz.)
Volume: 0.5 cubic centimeters (0.03 cubic inch)
Average Capacity: 130 mAh to 2.0 volts
(Rated at 15k ohms continuous at 21ºC)
Maximum Reverse Charge Current: 1 microampere
Energy Density: 209 milliwatt hr/g, 754 milliwatt hr/cc

TYPICAL DISCHARGE CURVE
Simulated Test @ 21ºC (70ºF)

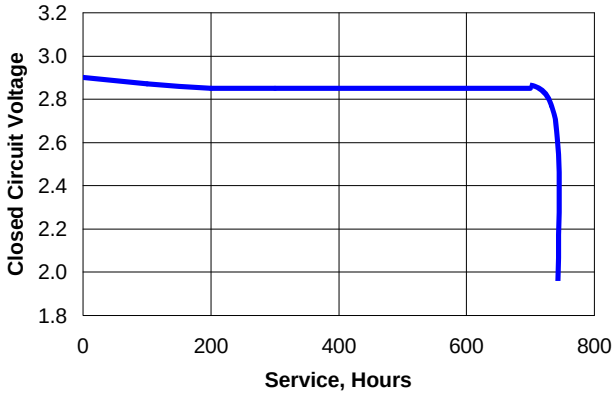

Simulated Application Test
Estimated Average Service at 21ºC (70ºF)

Schedule:	Typical Drains at 2.9V (microamperes)	Load (ohms)	Cutoff Voltage 2.0V
24 hours/day	190	15,000	710 Hours

Important Notice

This data sheet contains information specific to batteries manufactured at the time of its publication.
Contents herein do not constitute a warranty.
Copyright © Eveready Battery Co. Inc. - All Rights Reserved