


euro-block

product specification

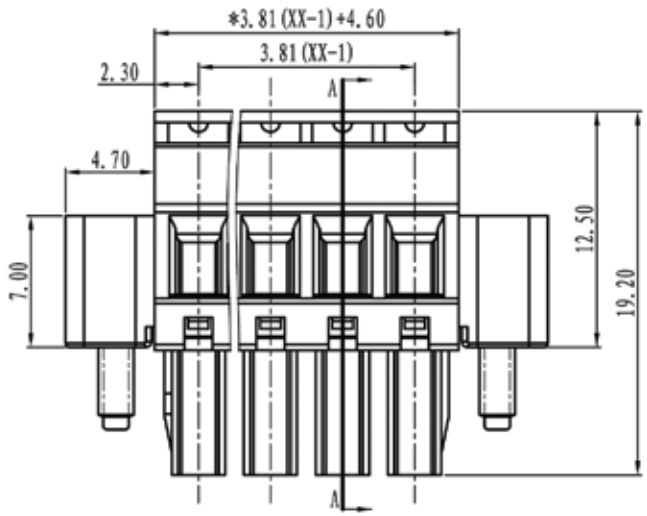

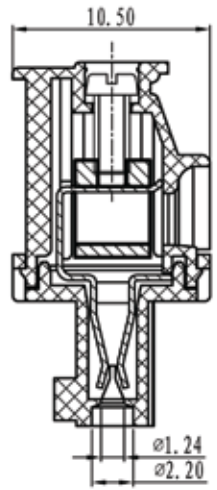

SECTION A-A

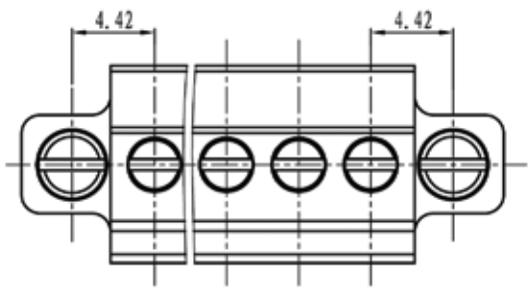

Electrical

Standard: UL-IEC
Rated voltage: 300V-250V
Rated current: 8A-7A
Contact resistance: 20m Ω
Wire range: 28-16AWG 1.5mm^2
Withstanding voltage: AC2000V/1Min
Insulation resistance: 5000M Ω/DC1000V

Mechanical

Temp.Range: -40°C~+105°C
Torque: 0.2Nm (1.7Lb'in)
Strip lenght: 6-7mm

Dimensions

Pitch: 3.81mm
Poles: 2p-24p

Material

Housing: PA66, UL94V-0
Screws: M2, steel Zinc plated
Wire guard: Brass, Ni plated
Clamp: Phosphor bronze, Ni plated

TOLERANCES EXCEPT AS NOTED

	linear dimension					fillet	chamfer		short angle sid					—	▱	//	⊥
variable range	to 6	over 6 to 30	over 30 to 120	over 120 to 480	over 480 to	all	to 6	over 6 to	to 10	over 10 to 50	over 50 to 120	over 120 to	all	to 5	over 5 to 30	over 30 to 120	over 120 to
tolerance	± 0.1	± 0.2	± 0.3	± 0.5	± 0.9	± 0.2	± 0.5	±1	1°	30′	20′	10′	0.5	0.025	0.06	0.12	0.4

Schema generale del codice di ordinazione / General description of ordering code

serie	n°poli	passo	versione	colore	custom
CRV	02/24	3.81	LF		

UNITS	mm	SIZE	A4	SCALE		FIRST ANGLE PROJECTION
euro-block					NAME	CRV-3.81-LF