
CRYSTEK MICROWAVE
A DIVISION OF CRYSTEK CORPORATION

2.92mm Plug to Solder Clamp for IW1501 Cable

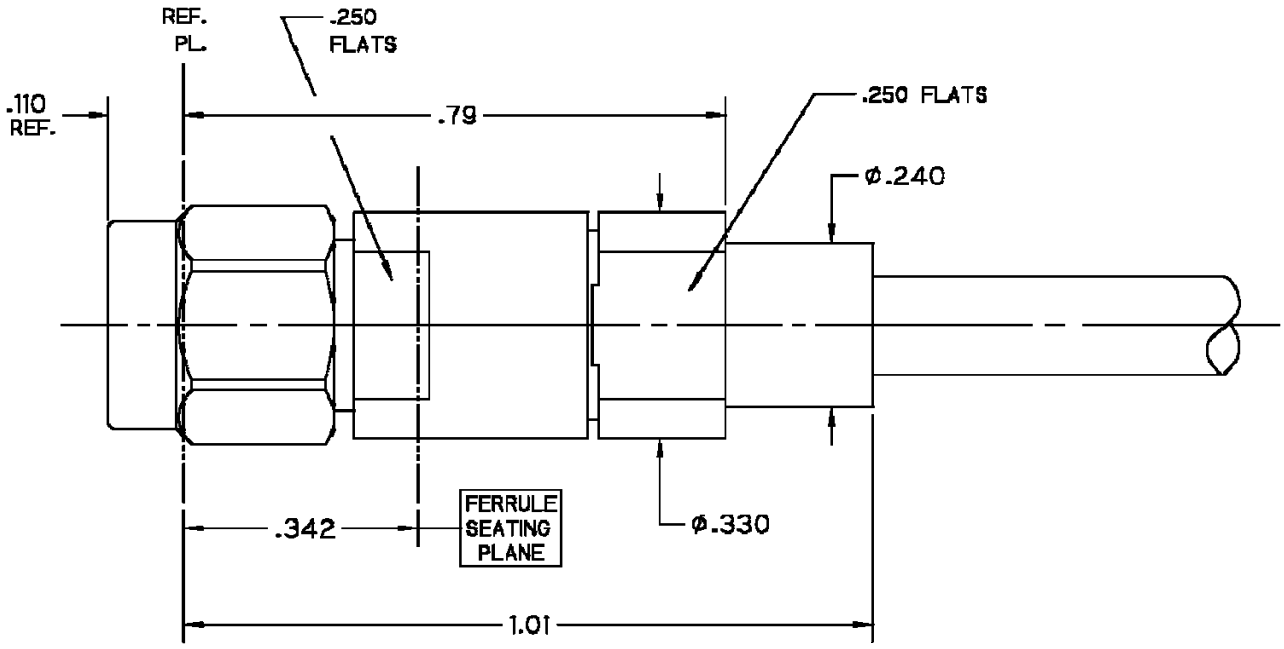

NOTES:

1.0 Materials

1.1 Body, Coupling, and Clamp Nuts: Steel. Corrosion Resistant per ASTM-A582. UNS No. S30300.

1.2 Center Conductor: Beryllium Copper per ASTM-B196. UNS C17300.

1.3 Solder Ferrule: Brass per ASTM-B16. UNS C36000.

1.4 Lock Ring: Beryllium Copper per ASTM-B197. UNS C17200.

1.5 Gasket and O-Ring: Silicone Rubber per A-A-59588.

1.6 Dielectric Bead: Polyphenylene Oxide (NORYL) per ASTM-D4349.

1.7 Cable Stop: Polyetherimide Thermoplastic (ULTEM 1000) per ASTM-D5205.

2.0 Finishes

2.1 Center Contact and Solder Ferrule: Gold Plate per ASTM-B488 50 Microinches Min. thickness over Electrolytic Nickel Plate per ASTM-B689 50 Microinches Min. thickness.

2.2 Body, Coupling, and Clamp Nuts: Passivated per SAE-AMS-2700.


2.3 Gasket, O-Ring, Lock Ring, and Dielectrics: None.

3.0 Interface per CC-2.92mm-Pin.

CRYSTEK CORPORATION
12730 Commonwealth Drive • Fort Myers, Florida 33913
Phone: 239-561-3311 • 800-237-3061
Fax: 239-561-1025 • www.crystek.com


CRYSTEK MICROWAVE
A DIVISION OF CRYSTEK CORPORATION

2.92mm Plug to Solder Clamp for IW1501 Cable

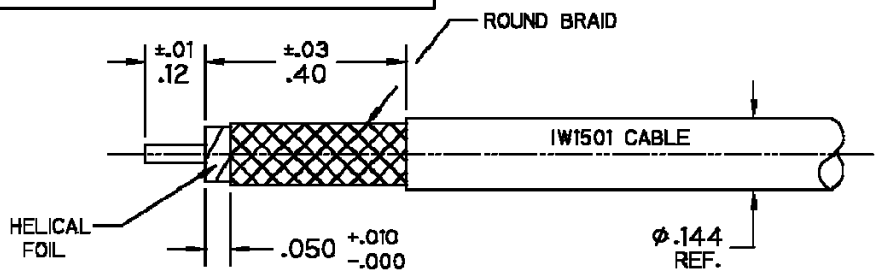

Step 1

1.1 Trim Cable as shown.

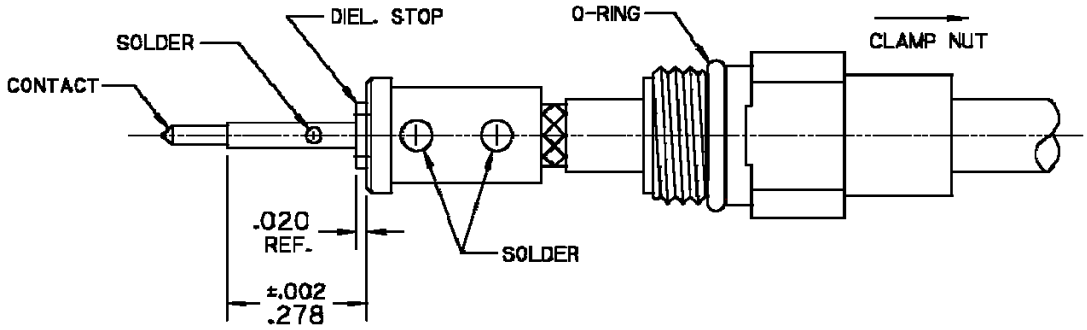


2.1 Install O-ring onto clamp nut where shown and slide clamp nut over cable in orientation shown.

2.2 Insert cable into solder ferrule until dielectric and foil are flush with solder ferrule face and solder cable braids where shown.

2.3 Slide dielectric stop over cable center conductor and solder contact flush to stop to dimension shown.

Step 2

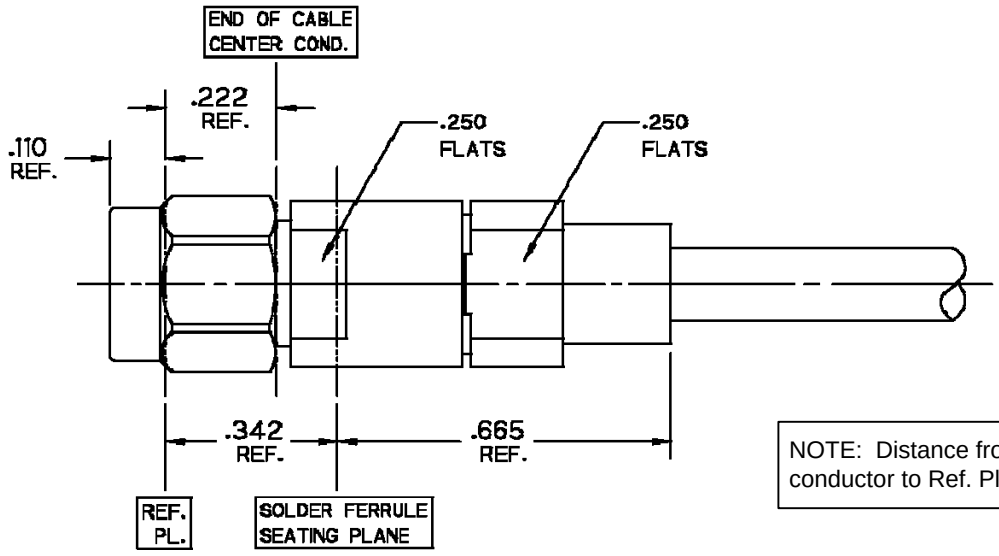

NOTE: Distance from end of cable center conductor to Ref. Pl. is 0.222 (Ref)

3.1 Insert cable/contact sub-assembly into connector until seated and tighten clamp nut to 25-35 in-lbs.

Step 3

Product Control:			
Crystek Part Number:	CS-FM-MJB	Release Date:	04-Jan-11
Revision Level:	A	Responsible:	K. Piotrowicz

CRYSTEK CORPORATION
12730 Commonwealth Drive • Fort Myers, Florida 33913
Phone: 239-561-3311 • 800-237-3061
Fax: 239-561-1025 • www.crystek.com