ULTRALIFE
BATTERY & ENERGY PRODUCTS

CS0033 (2/3M1)
Technical Datasheet



Features
- Cable connection for powering military devices


Applications
- Covert operations
- Homeland Security
- Surveillance

Technical Specifications	
Part No.	CS0033
NSN	6135-99-617-2805
Voltage Range	10.5 to 14.4V
Average Voltage	11 to 12V
Nominal Capacity	160Ah
Max. Discharge	5.0A continuous
Pulse Capability	N/A
Weight	6.7kg max.
Operating Temperature	-15°C to 55°C
Storage Temperature	-32°C to 70°C
Exterior/Housing	Moulded ABS case
Terminals/Connector	Amphenol 629B-56T-08-33-SN
Safety	Polyswitch Material Safety Datasheet - MSDS095 Safety Guide UBM-5135
Transportation	Class 9 - U.S. and International (see note)
Export License	ECCN 3A611.x export license required to export from U.S.
Harmonized Tariff Schedule	8506.50.0000


Note	A complete description of transportation regulations, lithium weights and transportation classifications is available on the Ultralife website.


Newark, New York | 315-332-7100 | Fax: 315-331-7800
©2015 Ultralife Corporation • www.ultralifecorp.com • All information is subject to change without notice.
The information contained herein is for reference only and does not constitute a warranty of performance. • 27 AUG 15 UBM-05284 Rev B


Dimensions

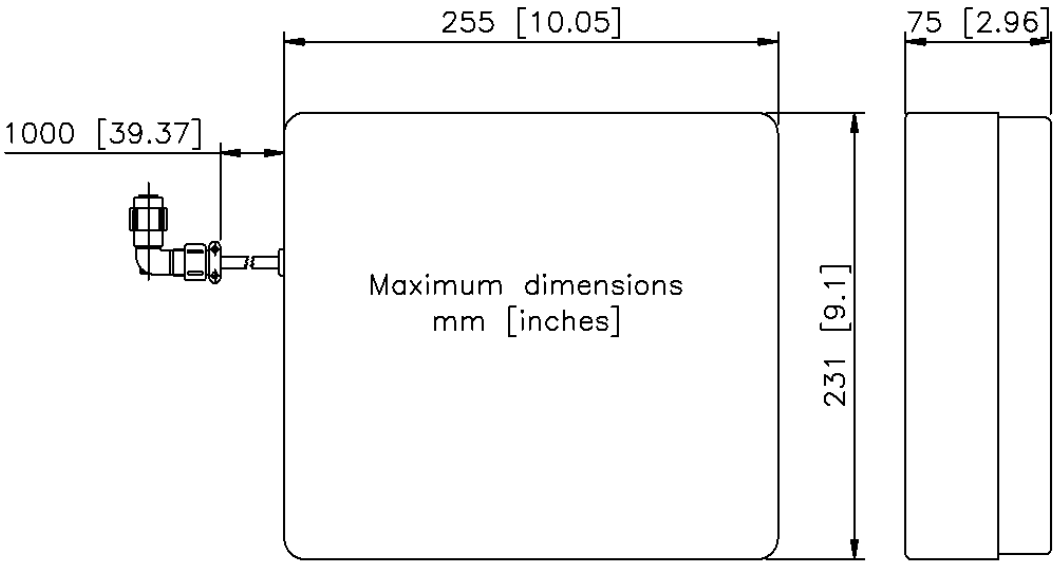

Performance Graphs

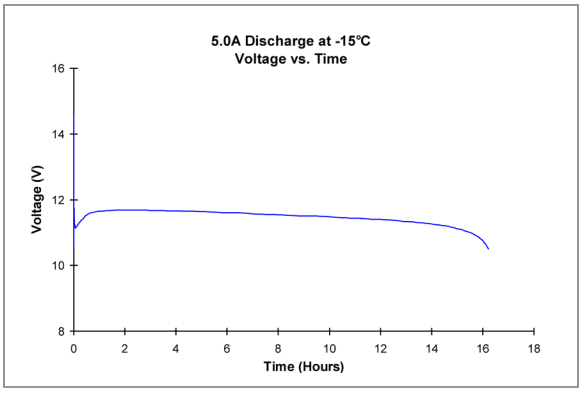

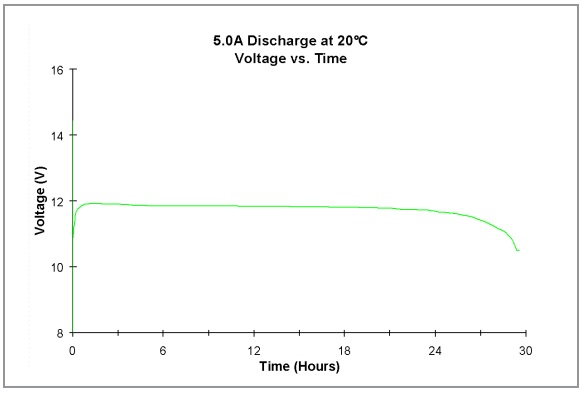

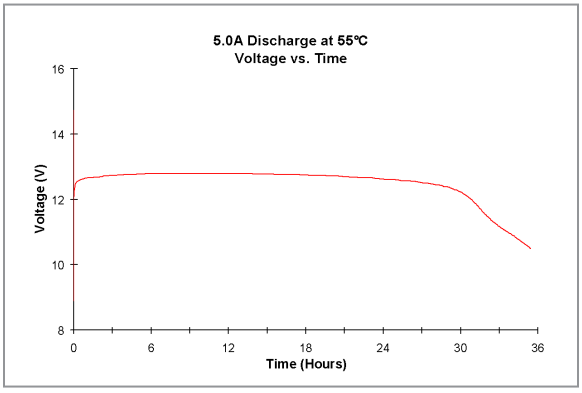

©2015 Ultralife Corporation • www.ultralifecorp.com • All information is subject to change without notice.
The information contained herein is for reference only and does not constitute a warranty of performance. • 27 AUG 15 UBM-05284 Rev B