CHINA
SEMICONDUCTOR
CORPORATION

Spec. No.	PS-ND-08090304
Rev.	A

PRODUCT SPECIFICATION

Model No：CSM-88137A9/88147A9

Descriptions:

- 1.5 Inch 8X8 Dot-Matrix Display
- Dot Pitch 4.76mm
- CSM-88137: Column Anode, Row Cathode
- CSM-88147: Column Cathode, Row Anode
- Emitting Color: Super Bright Amber

CUSTOMER APPROVED SIGNATURES	APPROVED BY	CHECKED BY	PREPARED BY

CHINA SEMICONDUCTOR CORPORATION
Address:2FL. NO.909,Chung-Cheng Road,
Chung-Ho City Taipei Hsien,Taiwan.

Tel:886-2-2223-9696
Fax:886-2-2223-9377

OPTO PLUS TECHNOLOGIES CO.,LTD
Address:696 Shun jiang Rd.,Ji Shan St.Shaoxing,
ZheJiang,China

Tel:86-0575-88623888
Fax:86-0575-88623112

Model No : CSM-88137A9/88147A9

■ Features -

1. 1.5 inch (37.02mm) Matrix height.
2. 8x8 array with X-Y select.
3. RoHS compliant.
4. Low power consumption.
5. Easy mounting on P.C. board or socket.

■ Device Selection Guide -

Part No.	Chip		Description	
	Material	Emitted Color	Column	Row
CSM-88137A9	AlGaInP	Super Bright Amber	Anode	Cathode
CSM-88147A9	AlGaInP	Super Bright Amber	Cathode	Anode

■ Package Dimensions -

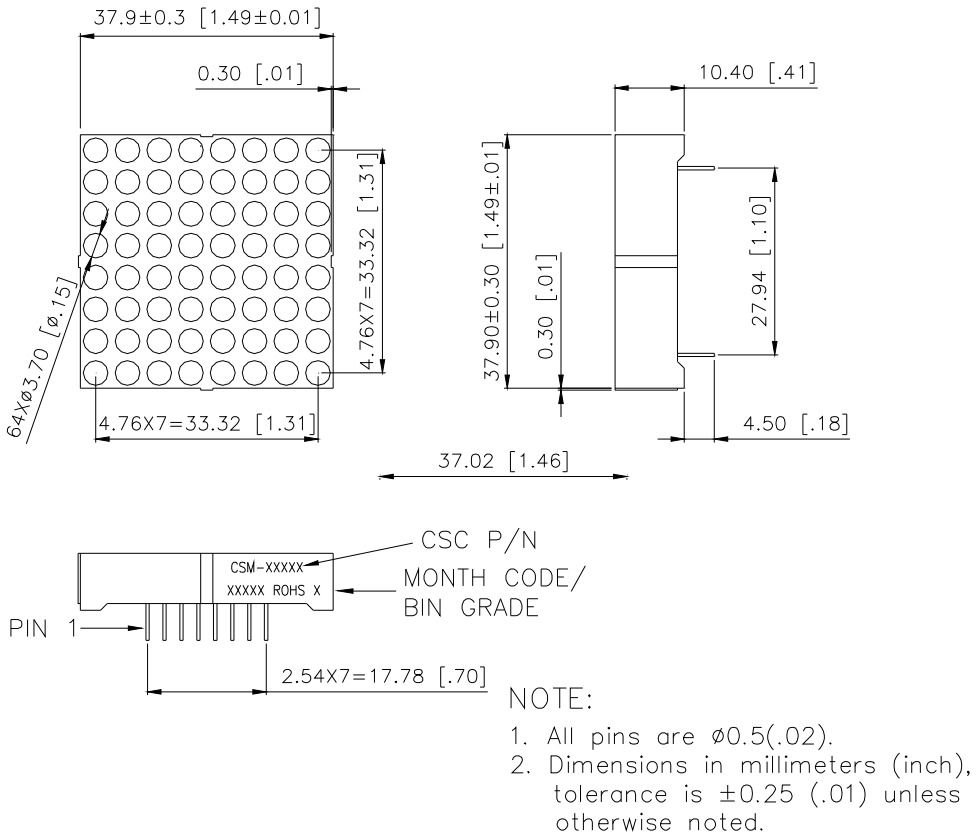

NOTE:
1. All pins are ø0.5(.02).
2. Dimensions in millimeters (inch), tolerance is ±0.25 (.01) unless otherwise noted.

Model No：CSM-88137A9/88147A9

■ **Internal Circuit Diagrams -**

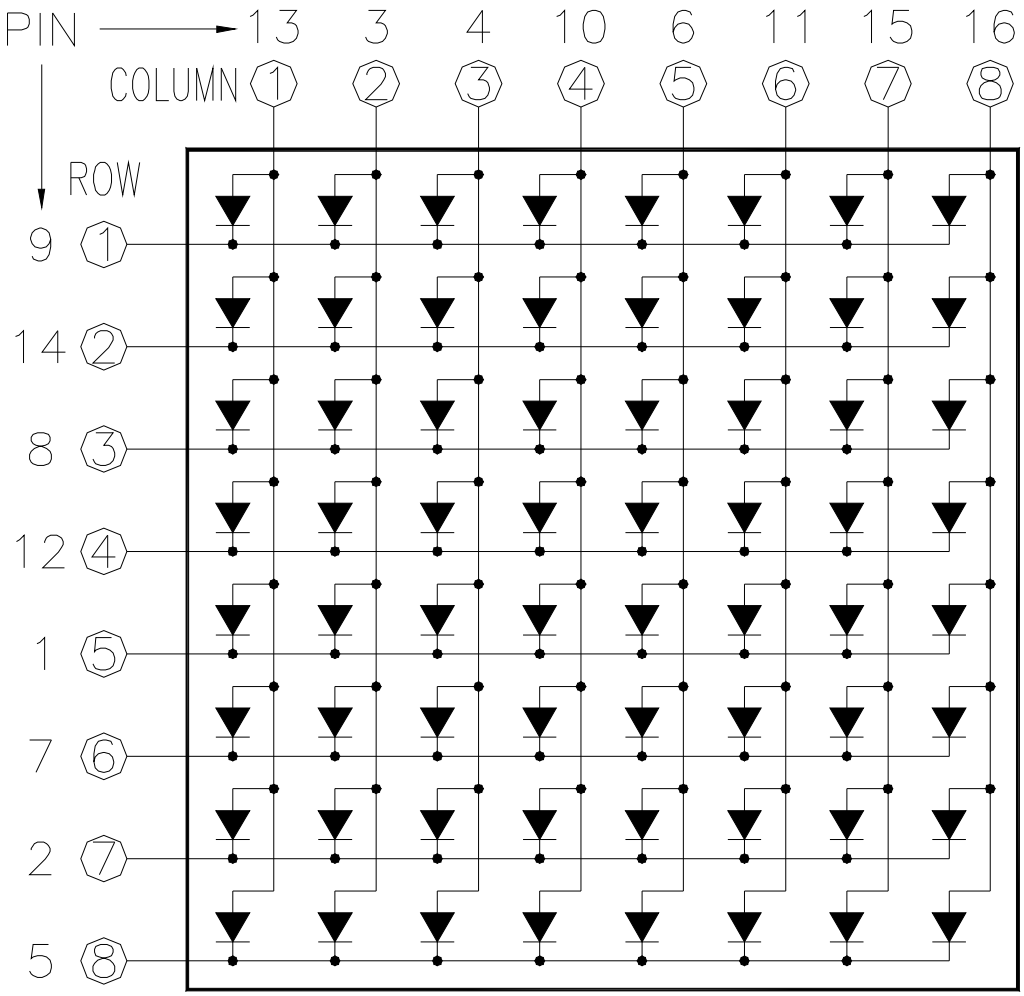

CSM−88137: Column Anode, Row Cathode

(CSM−88147: Column Cathode, Row Anode)

Model No：CSM-88137A9/88147A9

■ Absolute Maximum Rating -

(Ta=25℃)

Parameter	Symbol	Rating	Unit
Power Dissipation Per Dice	P_{AD}	70	mW
Continuous Forward Current Per Dice	I_{AF}	25	mA
Peak Current Per Dice(duty cycle 1/10,1KHz)	I_{PF}	90	mA
Derating Linear From 25℃ Per Dice	-	0.33	mA/℃
Reverse Voltage Per Dice	V_R	5	V
Operating Temp.	Topr	-35 ~ +85	℃
Storage Temp.	Tstg	-35 ~ +85	℃
Solder temperature 1/16 inch below seating plane for 3 seconds at 260℃			

■ Electro-optical Characteristics -

(Ta=25℃)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Forward Voltage Per Dot	V_F	-	2.0	2.8	V	I_F=20mA
Luminous Intensity Per Dot	Iv	-	35	-	mcd	I_F=10mA
Peak Emission Wavelength	λp	-	612	-	nm	I_F=20mA
Dominant Wavelength	λd	-	606	-	nm	I_F=20mA
Spectrum Radiation Bandwidth	$\Delta \lambda$	-	20	-	nm	I_F=20mA
Reverse Current	IR	-	-	100	μA	V_R=5V
Luminous Intensity Matching Ratio	IV-m	-	-	2:1	-	Ip=80mA 1/16Duty

Model No：CSM-88137A9/88147A9

■ Typical Electrical / Optical Charateristics Curves -

(Ta = 25℃ Unless Otherwise Noted)

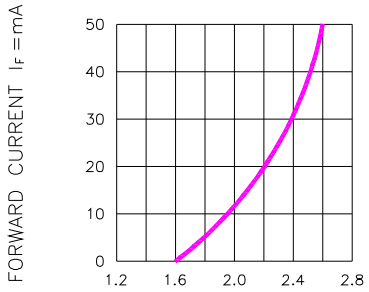

Fig.1 FORWARD CURRENT VS. FORWARD VOLTAGE

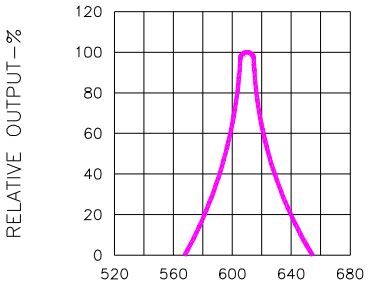

Fig.2 SPECTRAL RESPONSE

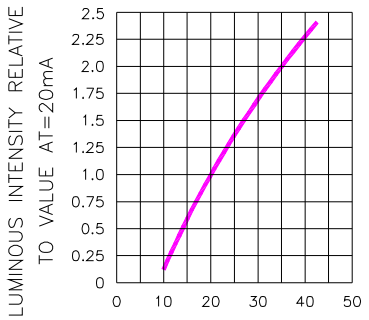

Fig.3 RELATIVE LUMINOUS INTENSITY VS. FORWARD CURRENT

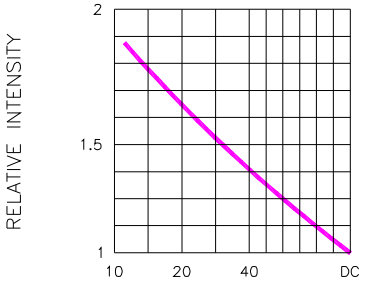

Fig.5 LUMINOUS INTENSITY VS. DUTY CYCLE

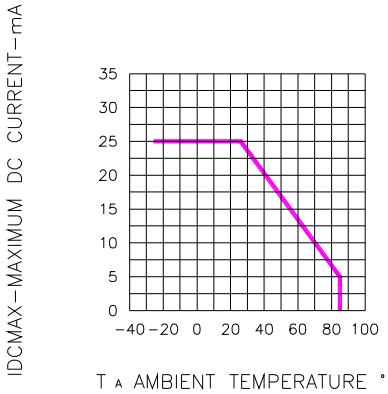

Fig.4 MAXIMUM ALLOWABLE DC CURRENT PER SEGMENT VS. A FUNCTION OF AMBIENT

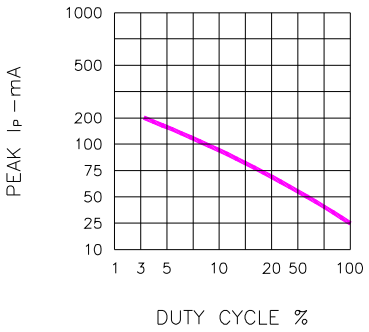

Fig.6 MAX PEAK CURRENT VS. DUTY CYCLE %
(REFRESH RATE f=1 KHz)

Model No：CSM-88137A9/CSM-88147A9

■ Package Dimensions

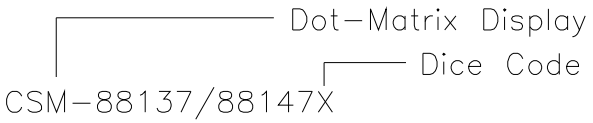



13 Pcs Per Tube

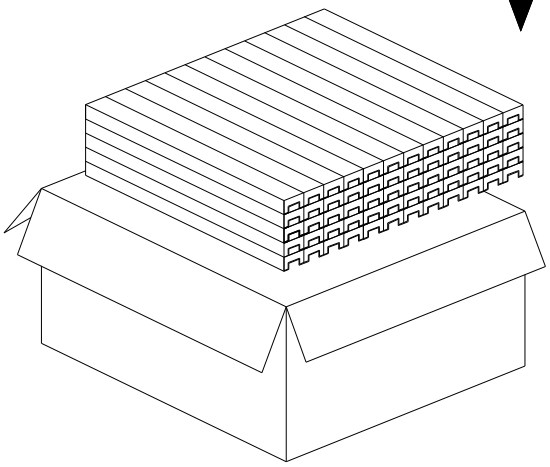

25 Tubes Per Inner Box
Total Q'TY: 325 Pcs

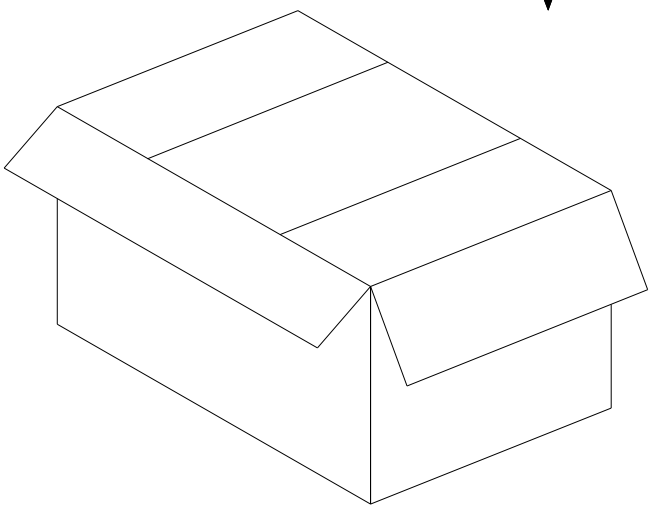

3 Inner Boxes Per Carton.

Total Q'TY: 975 Pcs

Carton Size:
L540*W485*H305.5 mm

Note: The specifications are subject to change without notice. Please contact us for updated information.