

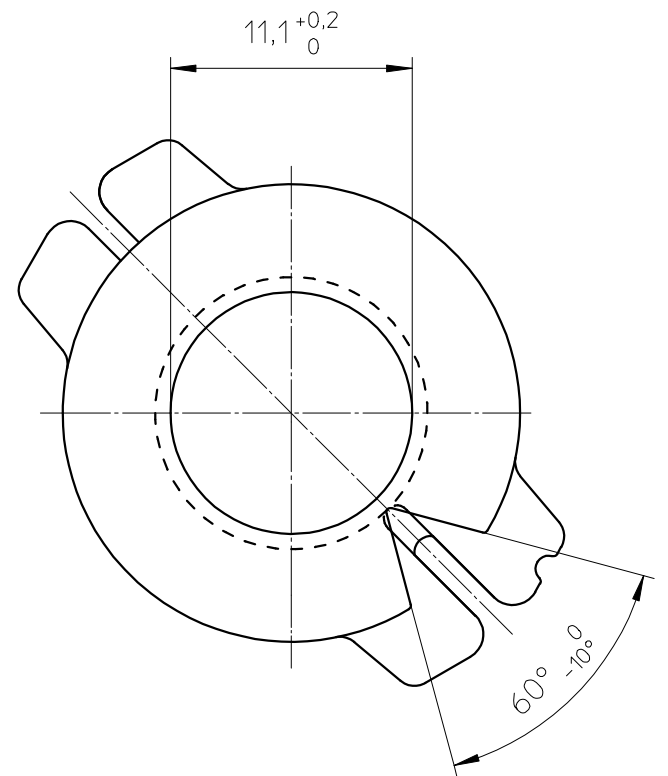
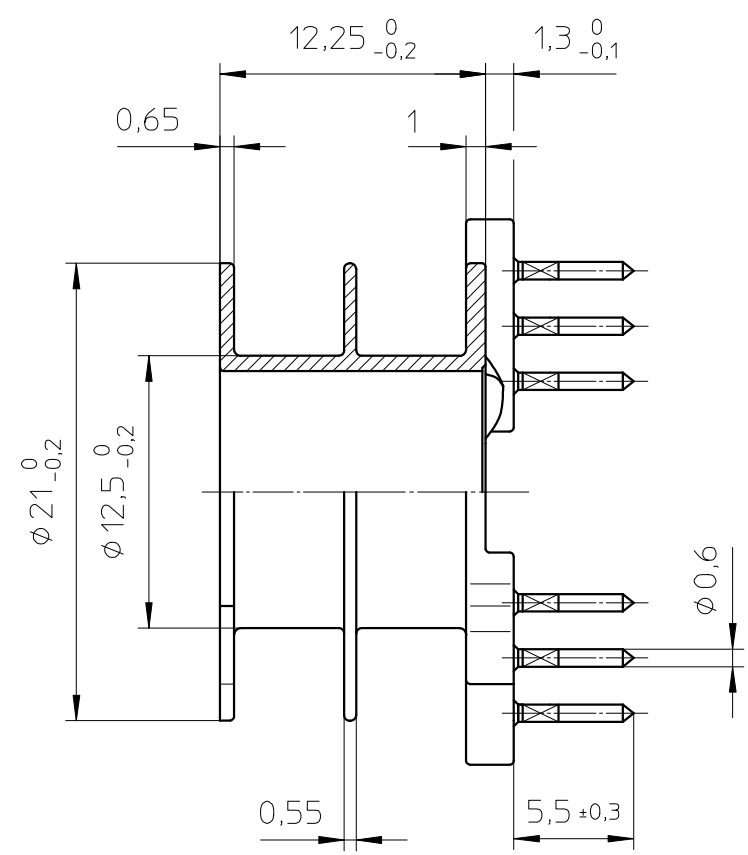
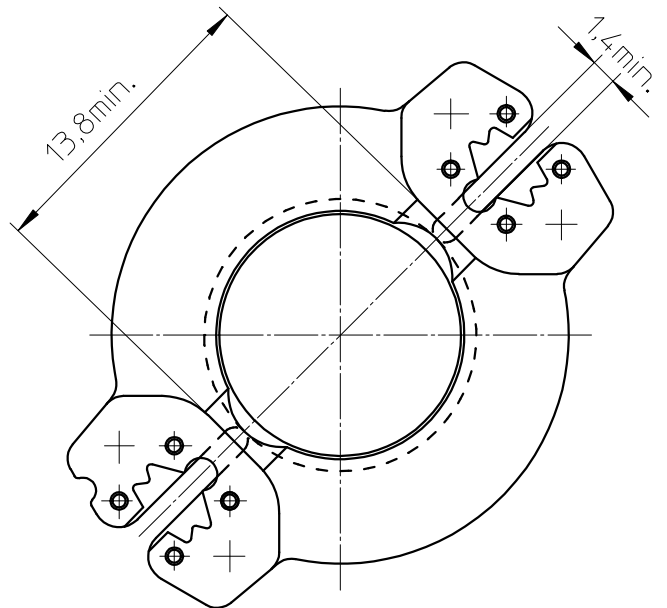





HOLE PATTERN:
Space requirement 10x10 pitch

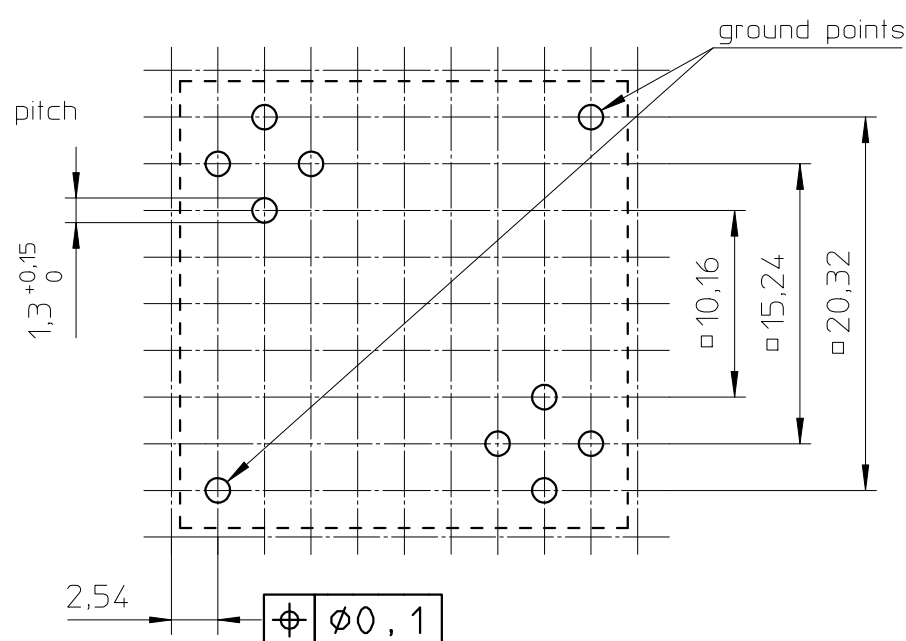

Coil former material: Bakelite UP 3420, glass-reinforced
UL file number: E61040 - UL94V-0.
Pin material: CuSn - Ni flash, Sn plated.
Max. operating temp.: acc. to IEC 60 085 class F, 155°C
Resistance to soldering heat: acc. to IEC 60 068-2-20 Part 2, Test Tb, method 1B 350°C-3,5sec.
Solderability: acc. to IEC 60 068-2-20 Part 2, Test Ta, method 1, 235°C-2sec.
Winding area: 42,7 mm.²
Mean length of turn: 52,3mm.

CLASS.NO.	CSV-RM10-2S-8P		4322 021 34782		04-09-28
90-01-26					2005-09-01
NAME NAAM					97-04-18
MPA	CHECK CONTR.	DAT.	89-04-05	Property of Eigendom van	00-05-02
NAME NAAM	M.Veekens	SUPERS. VERV.	1 SH SH BL. BL.	112 - 001	010
© FERROXCUBE 2000					00-08-01
					A3