

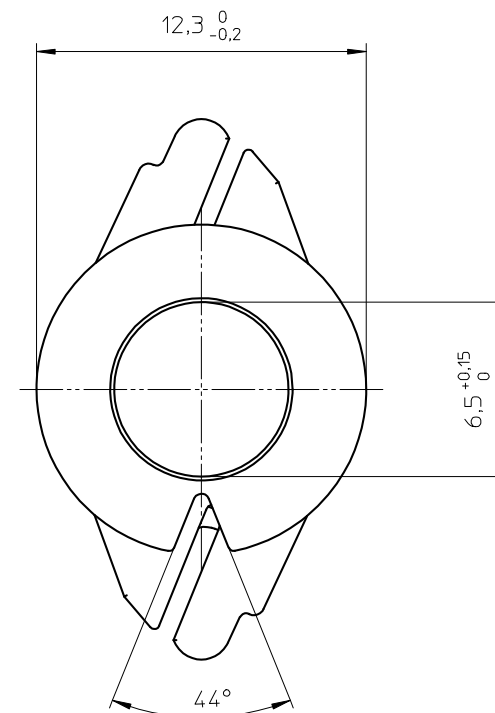
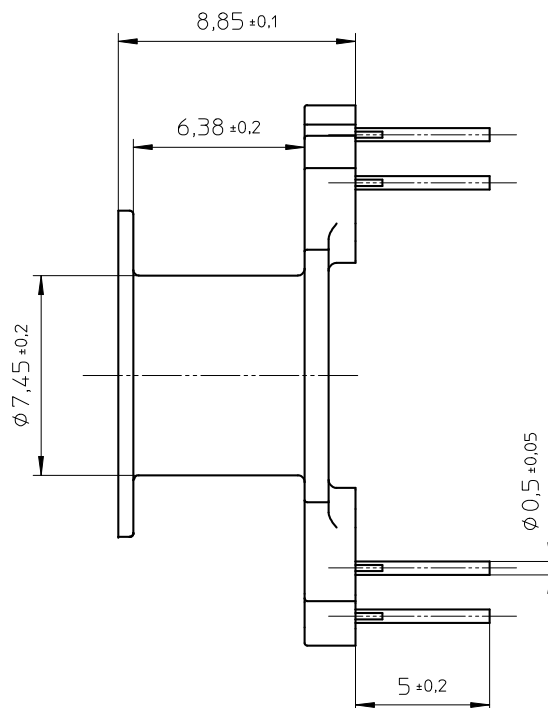


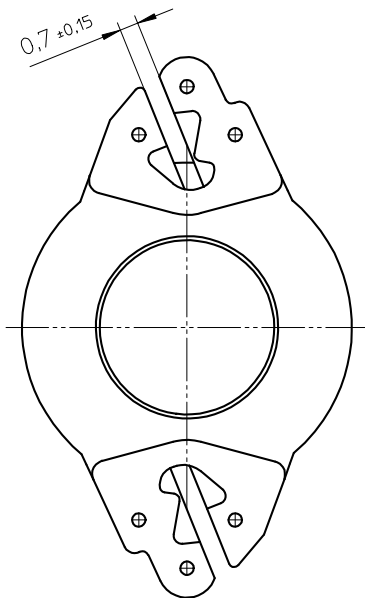

HOLE PATTERN:

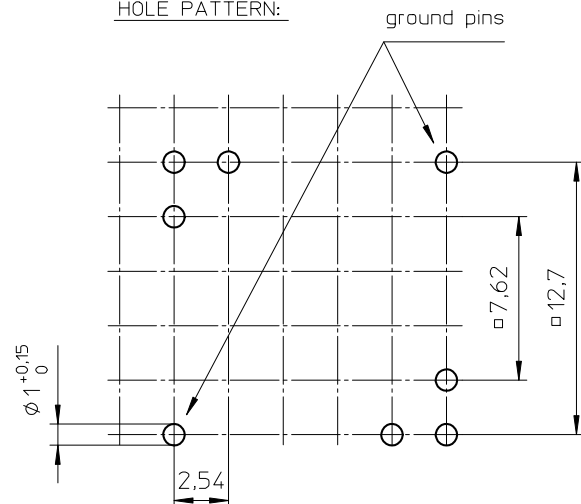

Coil former material:

Sumikan PM9630 (PF), glass-reinforced.

Pin material:

UL file number: E41429 - UL94V-0.

Max. operating temp.:

Copper-plated steel wire, Sn plated.

Resistance to soldering heat:

acc. to IEC 60085 class F, 150°C.

Solderability:

acc. to IEC 60068-2-20 Part 2, Test Tb, method 1B, 350°C - 3,5sec


Min. winding area:

acc. to IEC 60068-2-20 Part 2, Test Ta, method 1, 235°C - 2sec.

Mean length of turn:

14,5 mm².

30 mm.



CLASSNO.		CSV-RM6S-1S-6P-TZ		4322 021 06261		03-02-25
NAME		M.Tryngiel		SUPER.		08-06-19
NAAM		MPA		CHECK		
CONTR.		DAT.		03-02-25		
PROPERTY		Eigendom van		© FERROXCUBE 2008		
SPR		112		001		A3