


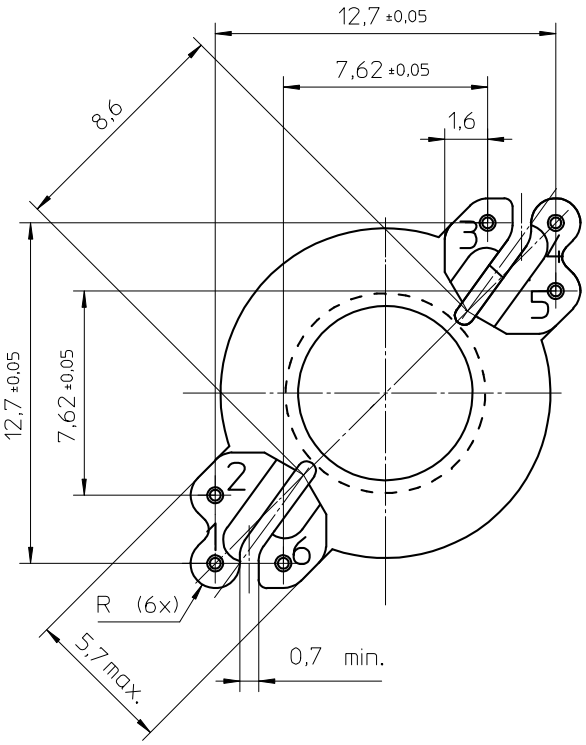


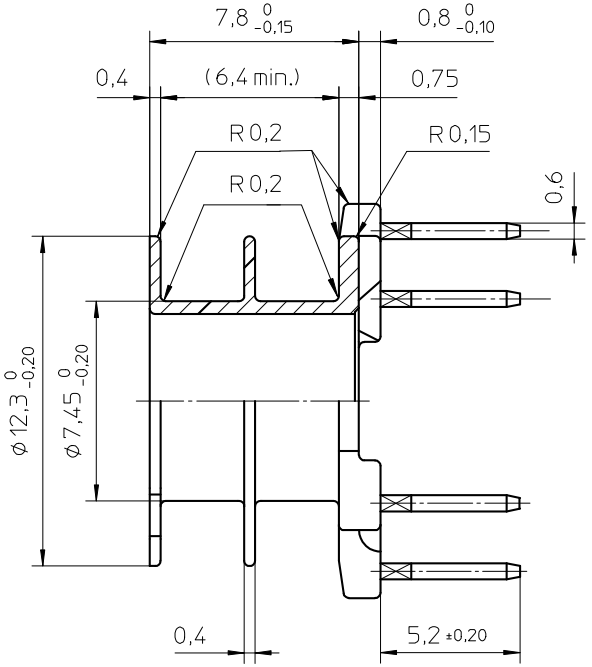

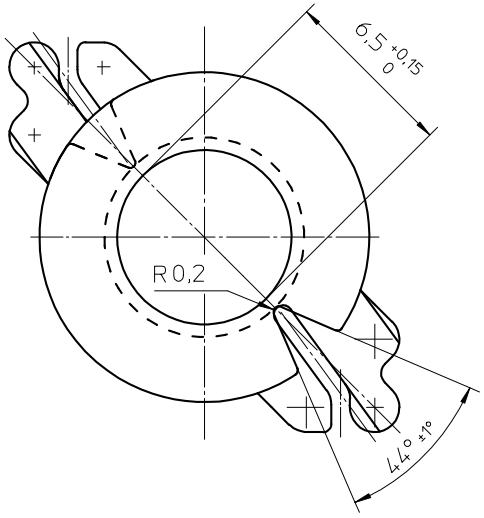

HOLE PATTERN:

Space requirement 6x6 pitch.

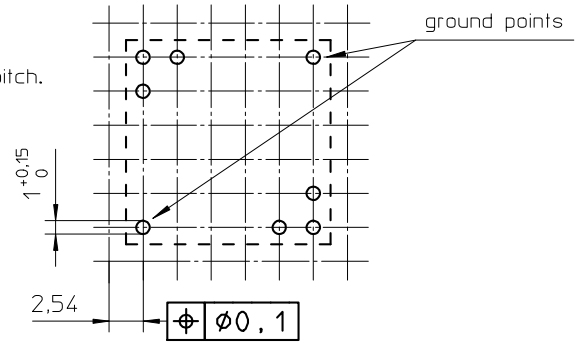

Coil former material:	Sumikon PM-9630 (PF), glass-reinforced. UL file number: E41429 - UL94V-0.
Pin material:	CuSn - Ni flash, Sn plated.
Max. operating temp.:	acc. to IEC 85 class H, 180°C.
Resistance to soldering heat:	acc. to IEC 68-2-20 Part 2, Test Tb, method 1B, 350°C - 3,5s.
Solderability:	acc. to IEC 68-2-20 Part 2, Test Ta, method 1, 235°C - 2s.
Min. winding area:	14 mm^2.
Mean length of turn:	30 mm.

CLASS.NO.	CSV-RM6R-2S-6P-IZ		4322 021 06921		07-11-08
NAME NAAM A.Wojtasz	SUPERS. VERV.	1	SH BL. SH BL. 112	– 001	010	A3
MPA	CHECK CONTR.	DAT. 07-11-08	Property of Eigendom van	© FERROXCUBE 2007		