


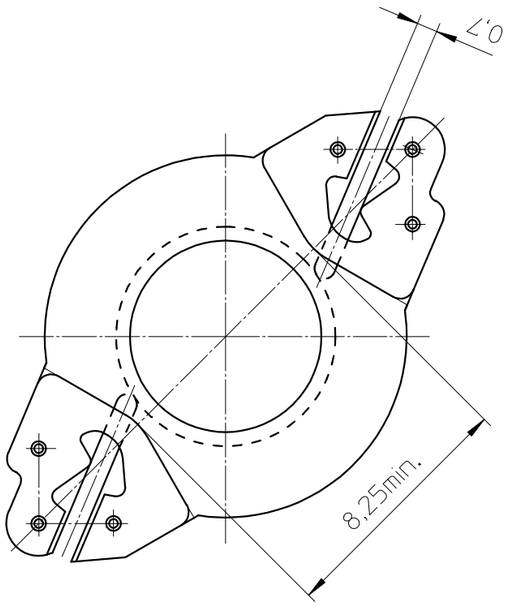


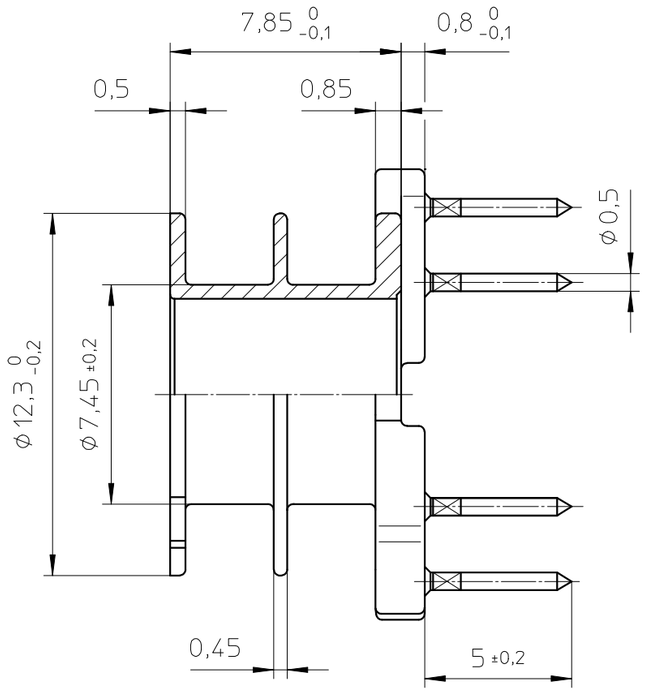

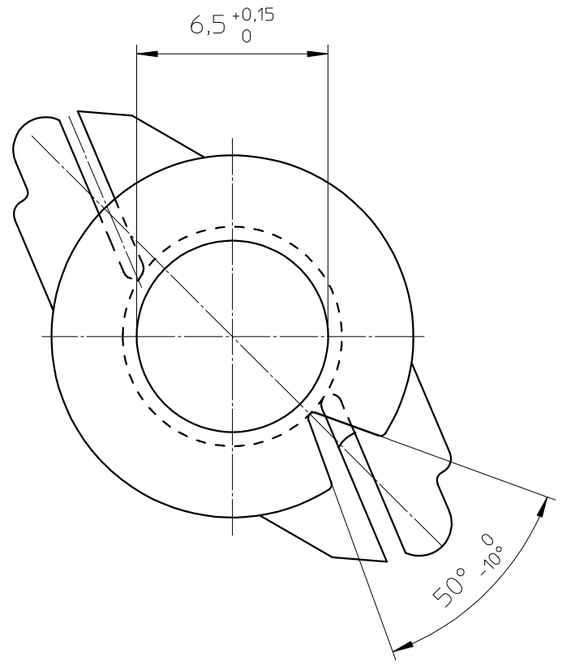

HOLE PATTERN:

Space requirement 6x6 pitch.

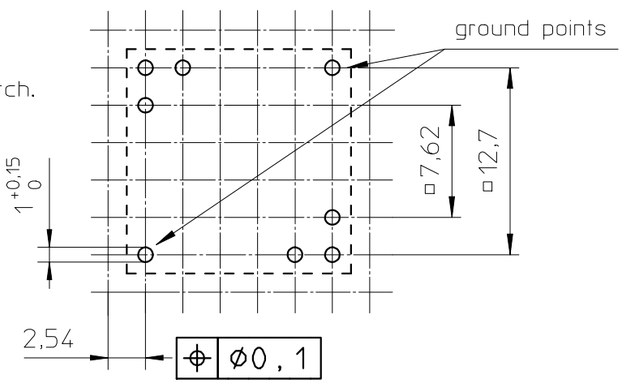

Coil former material:	Bakelite UP 3420 (UP), glass-reinforced. UL file number: E61040 - UL94V-0.
Pin material:	CuSn - Ni flash, Sn plated.
Max. operating temp.:	acc. to IEC 60 085 class H, 180°C.
Resistance to soldering heat:	acc. to IEC 60 068-2-20 Part 2, Test Tb, method 1B, 350°C - 3,5sec.
Solderability:	acc. to IEC 60 068-2-20 Part 2, Test Ta, method 1, 235°C - 2sec.
Min. winding area:	13.8 mm^2.
Mean length of turn:	30 mm.

CLASS.NO.	CSV-RM6S-2S-6P	4322 021 34601	~~00-05-24~~ ~~00-08-01~~ ~~02-04-04~~ ~~03-06-30~~ 05-09-01
NAME NAAM M.Veekens	SUPERS. VERV.	1 SH BL. SH BL. 112 – 001	010 A3
MPA CHECK CONTR.	DAT. 89-11-21	Property of Eigendom van © FERROXCUBE 2000	