
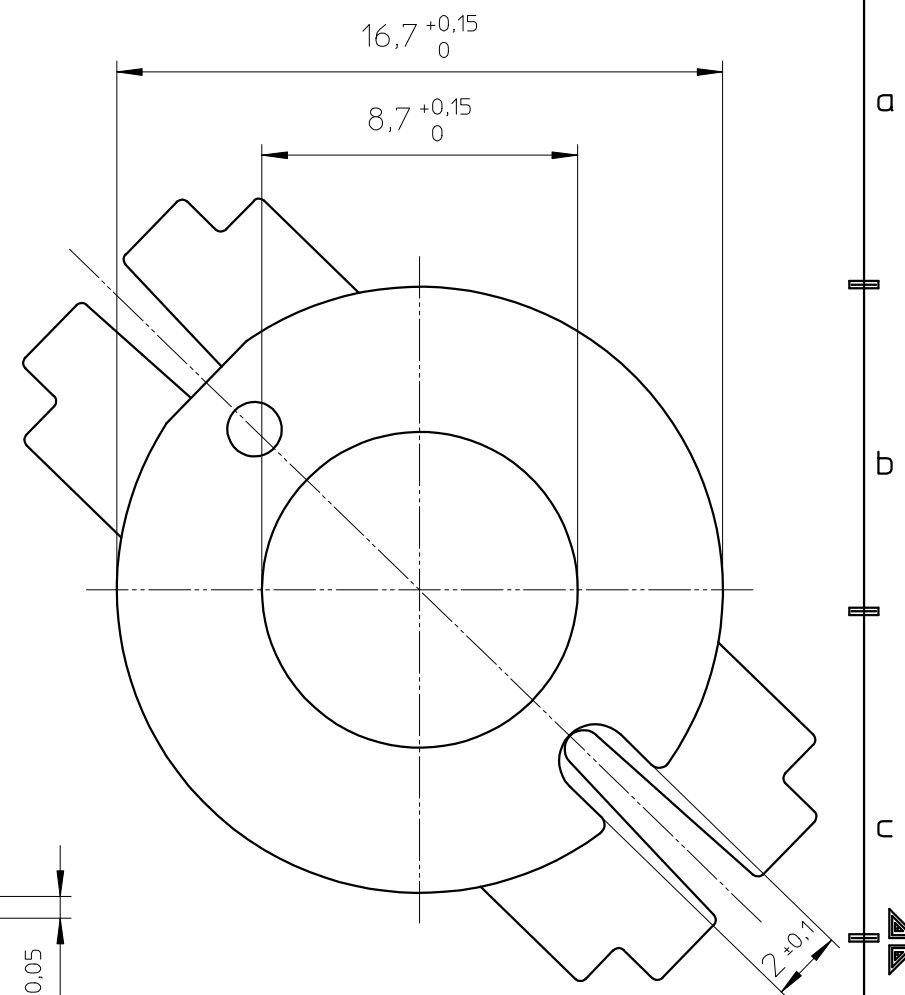
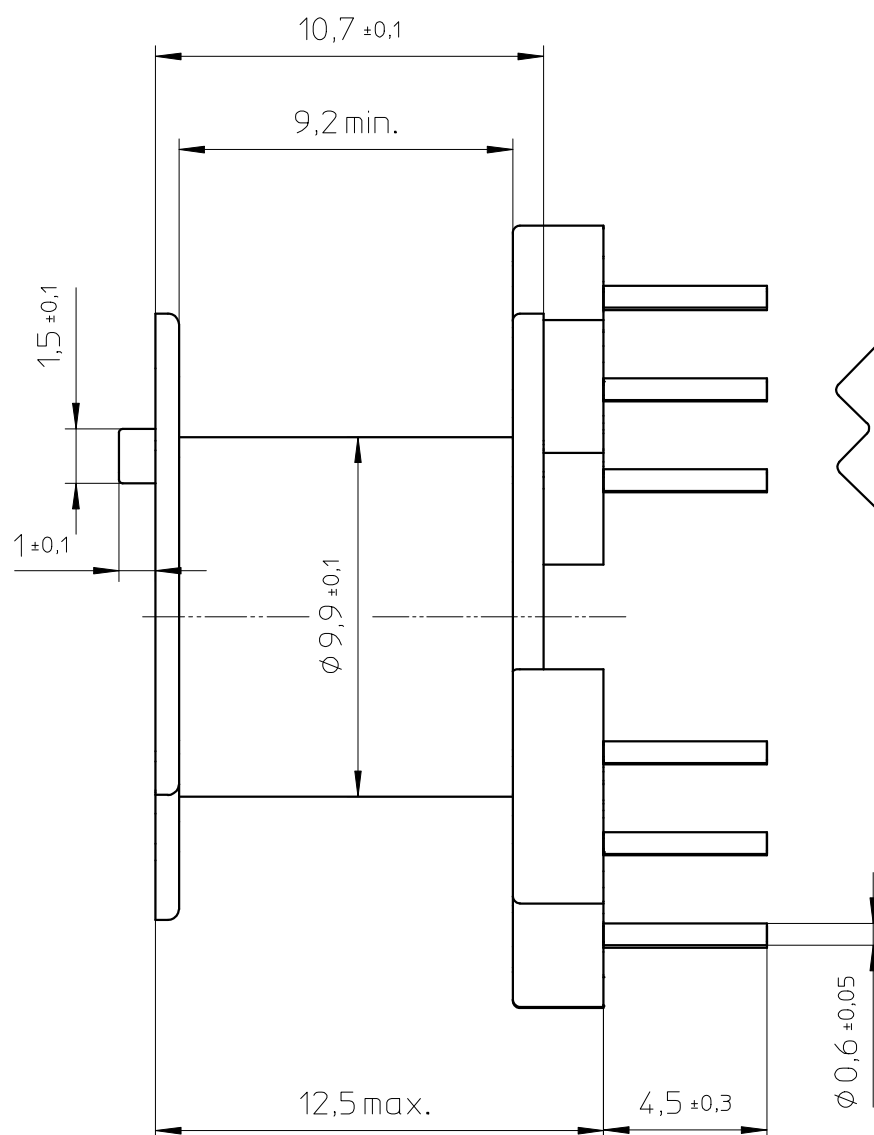
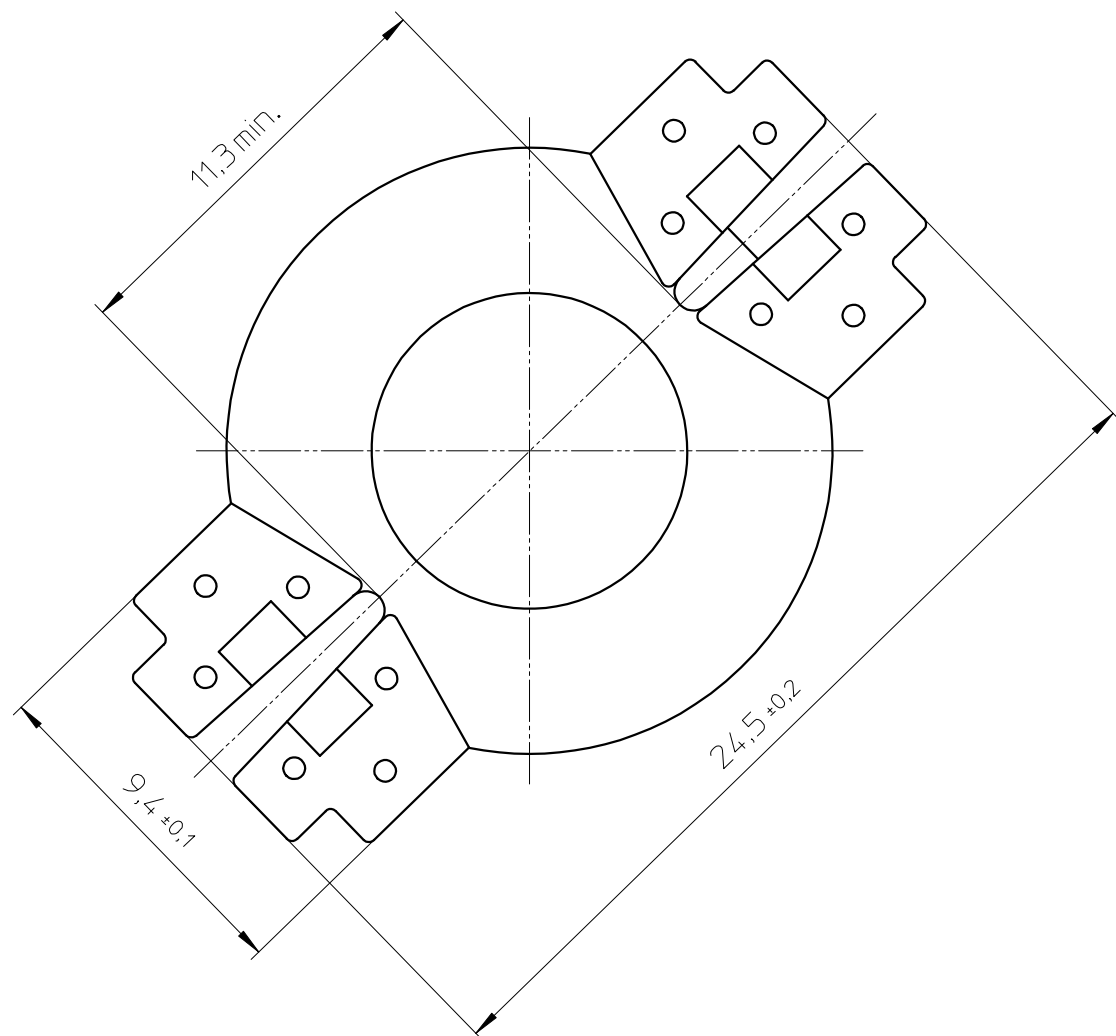


HOLE PATTERN:

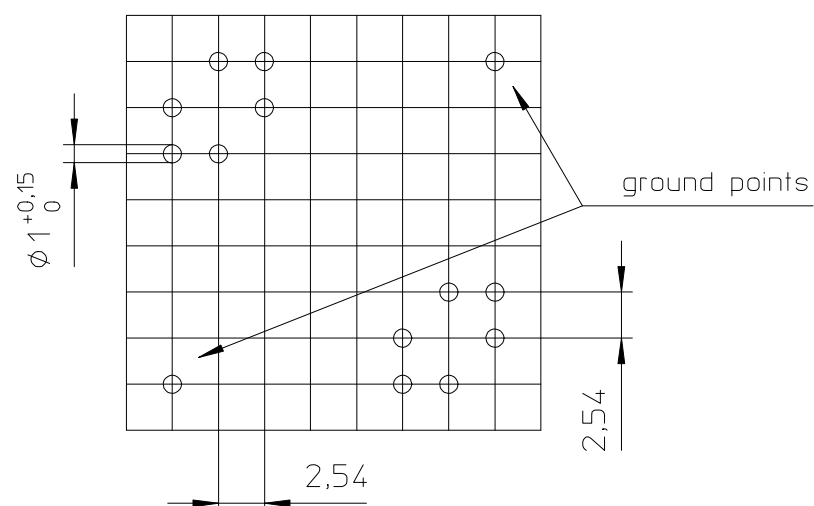

Coil former material:

Sumikon PM9630 (PF), glass-reinforced.
UL file number: E41429(M) - UL94V-0.

Pin material:

Copper-clad steel, Sn plated.

Max. operating temp.:

acc. to IEC 85 class F, 150°C.

Resistance to soldering heat:

acc. to IEC 68-2-20 Part 2, Test Tb, method 1B, 350°C - 3,5sec.

Solderability:

acc. to IEC 68-2-20 Part 2, Test Ta, method 1, 235°C - 2sec.

Min. winding area:

31 mm².

Mean length of turn:

42 mm.

CLASS.NO.		CSV-RM8-1S-12P-TA				4322 021 02621				98-11-09	
										06-06-28	
NAME NAAM	A.Wojtasz			SUPERS. VERV.	001		SH BL.	SH BL.	112 - 001	069	A3
MPA		CHECK CONT.	98-01-19		Property of Eigendom van		© FERROXCUBE 2000				