

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

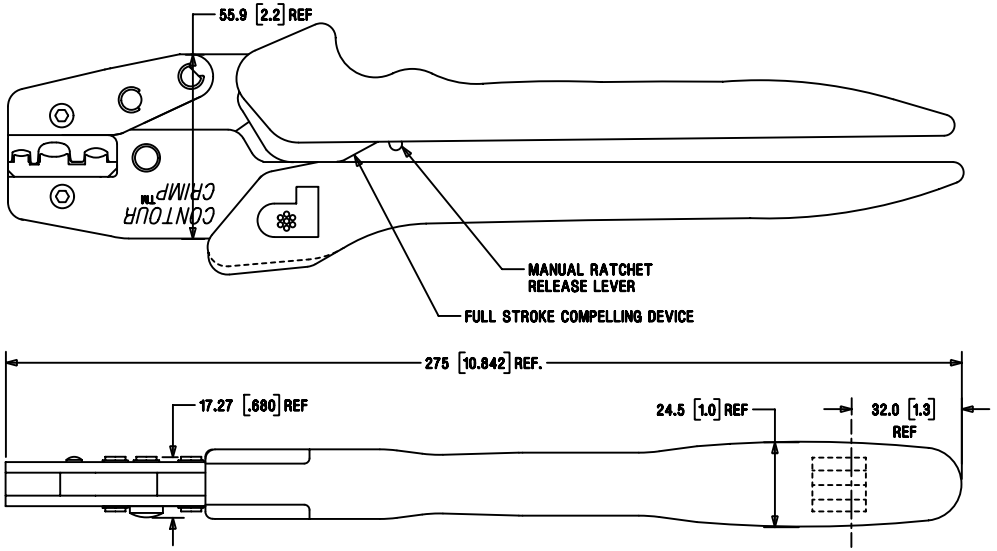

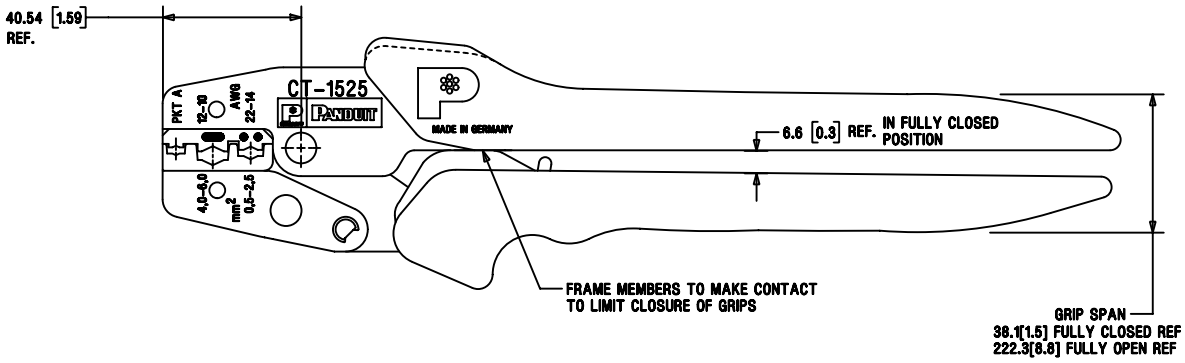

NOTES,UNLESS OTHERWISE SPECIFIED:

TOOL WEIGHT: 1.70 lbs./ 0.77 Kg

ALL DIMENSIONS IN METRIC (mm)
[ ] DIMENSIONS IN INCHES

HANDLES TO SPRING RETURN FREELY TO OPEN POSITION AFTER CRIMPING

TOOL FRAME MEMBERS AND FASTENERS TO INCORPORATE BLACK OXIDE FINISH

RECOMMENDED LUBE FOR FRAME LINKAGE:

MOLYKOTE BR2 PLUS
(SUPPLIER, DOW CORNING)

AWG, mm2 LETTERING AND ALL GUAGE MARKINGS TO BE OF EQUAL SIZE OF 2.54[0.1] HEIGHT

REV	DATE	BY	CHK	DESCRIPTION	ECN	-	R	CUST	SUP	GMSH
00	4-6-99	RBC		RLSD FOR PRODUCTION	3788	---		JFL		

CAD FILENAME/LAYER: R23624AA_TP23624C01_00

PANDUIT CORP TINLEY PARK, ILLINOIS

CD#CT-1525

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: (.X) ±0.8 (.XXX) ±0.1 (.XXX) ±0.01 ANGLES ±

UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION

DRAWN BY: RBC
DATE: 4-6-99
CHK'D:

MAT'L: SEE NOTES

SCALE: 1 : 1

DRAWING NO.: TP23624C01

SIZE: C