


CTDD1906SF-D1K-1 Series

Fixed Input Isolated & Unregulated
1W Output, Dual Output

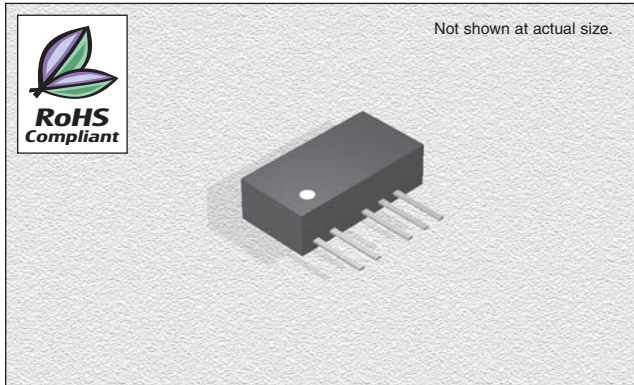

FEATURES

Efficiency: To 80%

Temperature Range: -40°C to +85°C

Isolation: 1KVDC

Package: UL94-V0

Miscellaneous: Positive & Negative Voltage Output. No heat sink required. No external components required. Industry standard pinout. Small Footprint. SIP package style. Power Density 0.85W/cm³. Low Cost.

Samples available.

CHARACTERISTICS

Short Circuit Protection: 1 second

Temperature Rise at Full Load: 25°C Max. 15°C Typ.

Cooling: Free air convection

Operating Temperature Range: -40°C to +85°C

Storage Temperature Range: -55°C to +125°C

Lead Temperature: 300°C (1.5mm from case for 10 seconds)

Storage Humidity Range: ≤ 95%

Case Material: Plastic (UL94-V0)

MTBF: >3,500,000 hours

Miscellaneous: RoHS Compliant.

SPECIFICATIONS

Part Number	Vin Nom. (VDC)	Vin Range (VDC)	Voltage Out (VDC)	Io Max. (mA)	Io Min. (mA)	Effi. Typ. (%)
CTDD1906SF-0505-D1K-1	5	4.5-5.5	±5	±100	±10	72
CTDD1906SF-0509-D1K-1	5	4.5-5.5	±9	±56	±6	75
CTDD1906SF-0512-D1K-1	5	4.5-5.5	±12	±42	±5	78
CTDD1906SF-0515-D1K-1	5	4.5-5.5	±15	±33	±4	79
CTDD1906SF-1205-D1K-1	12	10.8-13.2	±5	±100	±10	74
CTDD1906SF-1209-D1K-1	12	10.8-13.2	±9	±56	±6	76
CTDD1906SF-1212-D1K-1	12	10.8-13.2	±12	±42	±5	79
CTDD1906SF-1215-D1K-1	12	10.8-13.2	±15	±33	±4	80
CTDD1906SF-2405-D1K-1	24	21.6-26.4	±5	±100	±10	74
CTDD1906SF-2409-D1K-1	24	21.6-26.4	±9	±56	±6	76
CTDD1906SF-2412-D1K-1	24	21.6-26.4	±12	±42	±5	80
CTDD1906SF-2415-D1K-1	24	21.6-26.4	±15	±33	±4	81

ISOLATION SPECIFICATIONS

Item	Test Condition	MIN	TYP	MAX	Units
Isolation Voltage	Tested for 1 minute	1000			VDC
Isolation Resistance	Test at 500VDC	1000			MΩ


OUTPUT SPECIFICATIONS

Item	Test Condition	MIN	TYP	MAX	Units
Output Power		0.1		1	W
Line regulation	For Vin change of 1%			1.2	%
Load regulation	10% to 100% full load		10	15	%
Output voltage accuracy	See tolerance envelope graph				
Temperature drift	100% full load			0.03	%/°C
Output ripple	20MHz Bandwidth		50	75	mVp-p
Switching frequency	Full load, nominal input		100		KHz

Note:



1. All specifications measured at TA=25°C, humidity<75%, nominal input voltage and rated output unless otherwise specified.

TYPICAL CHARACTERISTICS

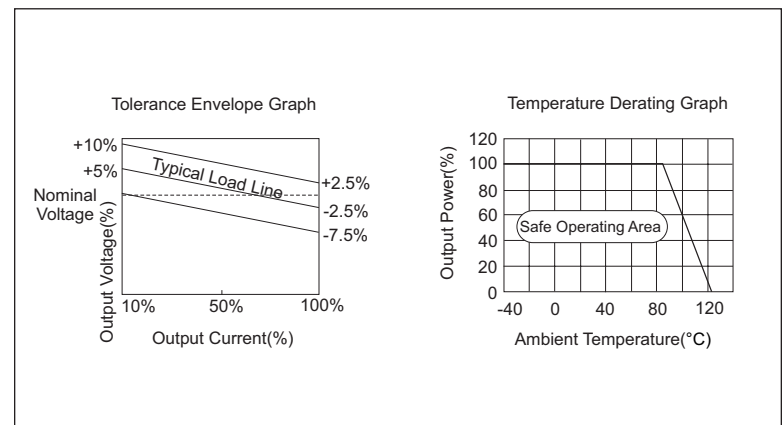

CTDD1906SF-D1K-1 Series

Fixed Input Isolated & Unregulated
1W Output, Dual Output

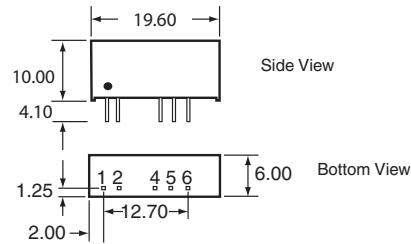OUTLINE DIMENSIONS & RECOMMENDED FOOTPRINT DETAILS**CTDD1906SF-D1K-1 Package****CTDD1906SF-D1K-1 Footprint**

Note: All Pins on a 2.54m pitch; all pin diameters are 0.50mm; all dimensions in mm.

PIN CONNECTIONS

Pin	Function
1	Vin
2	GND
4	-Vo
5	0V
6	+Vo

