


CTML1206 Series

From .047 μ H to 33 μ H

ENGINEERING KIT #17

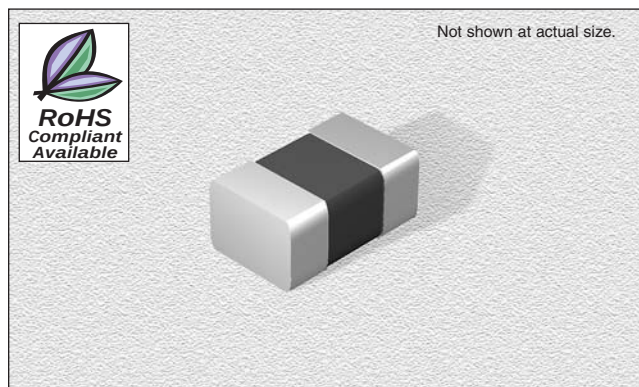

CHARACTERISTICS

Description: Ferrite core, multi-layer chip inductor. Magnetic shielded.

Applications: LC resonant circuits such as oscillator and signal generators, RF filters, disk drives, audio and video equipment, TV, radio and telecommunication equipment

Operating Temperature: -55°C to +125°C

Inductance Tolerance: $\pm 10\%$ & $\pm 20\%$

Testing: Inductance and Q are tested on an HP4285A or HP4286A at specified frequency

Packaging: Tape & Reel


Miscellaneous: RoHS Compliant available.

Marking: Reels marked with inductance code and tolerance

Additional Information: Additional electrical & physical information available upon request

Samples available. See website for ordering information.

PAD LAYOUT

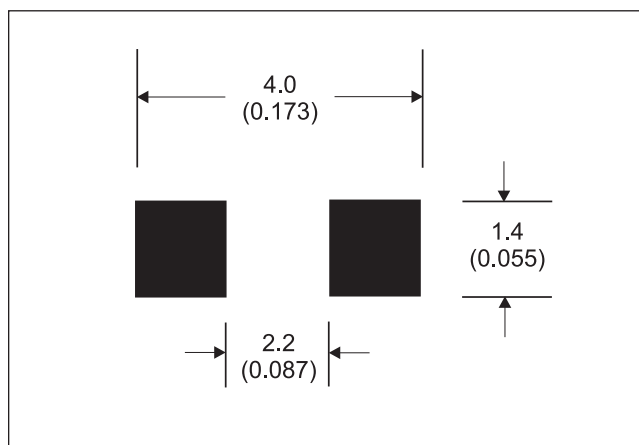

SPECIFICATIONS

Please specify tolerance code when ordering.


CTML1206-R10_ ← K = $\pm 10\%$, M = $\pm 20\%$

CTML1206F_ Please specify "F" for RoHS compliant

Part Number	Inductance (μ H)	L Test Freq. (MHz)	Q Factor Min.	Q Test Freq. (MHz)	SRF Min. (MHz)	DCR Max. (Ω)	Rated DC (mA)
CTML1206_-R047M	.047	50	25	50	320	.15	300
CTML1206_-R068M	.068	50	25	50	280	.25	300
CTML1206_-R082M	.082	50	25	50	250	.25	300
CTML1206_-R10_	.10	25	30	25	235	.25	250
CTML1206_-R12_	.12	25	30	25	250	.30	250
CTML1206_-R15_	.15	25	30	25	200	.30	250
CTML1206_-R18_	.18	25	30	25	185	.40	250
CTML1206_-R22_	.22	25	30	25	170	.50	250
CTML1206_-R27_	.27	25	30	25	150	.50	250
CTML1206_-R33_	.33	25	30	25	145	.60	250
CTML1206_-R39_	.39	25	30	25	135	.50	200
CTML1206_-R47_	.47	25	30	25	125	.60	200
CTML1206_-R56_	.56	25	30	25	115	.70	150
CTML1206_-R68_	.68	25	30	25	105	.80	150
CTML1206_-R82_	.82	25	30	25	100	.90	150
CTML1206_-1R0_	1.0	10	45	10	75	.40	100
CTML1206_-1R2_	1.2	10	45	10	65	.50	100
CTML1206_-1R5_	1.5	10	45	10	60	.50	50
CTML1206_-1R8_	1.8	10	45	10	55	.50	50
CTML1206_-2R2_	2.2	10	45	10	50	.60	50
CTML1206_-2R7_	2.7	10	45	10	45	.60	50
CTML1206_-3R3_	3.3	10	45	10	41	.70	50
CTML1206_-3R9_	3.9	10	45	10	38	.80	50
CTML1206_-4R7_	4.7	10	45	10	35	.90	50
CTML1206_-5R6_	5.6	4.0	45	4.0	32	.70	25
CTML1206_-6R8_	6.8	4.0	45	4.0	29	.90	25
CTML1206_-8R2_	8.2	4.0	45	4.0	26	.90	25
CTML1206_-100_	10	2.0	45	2.0	24	1.0	25
CTML1206_-120_	12	2.0	45	2.0	22	1.0	15
CTML1206_-150_	15	1.0	35	1.0	19	.70	5.0
CTML1206_-180_	18	1.0	35	1.0	18	.70	5.0
CTML1206_-220_	22	1.0	30	1.0	16	.90	5.0
CTML1206_-270_	27	1.0	30	1.0	14	.90	5.0
CTML1206_-330_	33	.40	30	.40	13	1.0	5.0

PHYSICAL DIMENSIONS

Size	A	B	C Max.	D
mm	3.2 $\pm$ 0.2	1.6 $\pm$ 0.2	1.3	0.5 $\pm$ 0.3
inches	0.13 $\pm$ 0.008	0.06 $\pm$ 0.008	0.05	0.02 $\pm$ 0.3

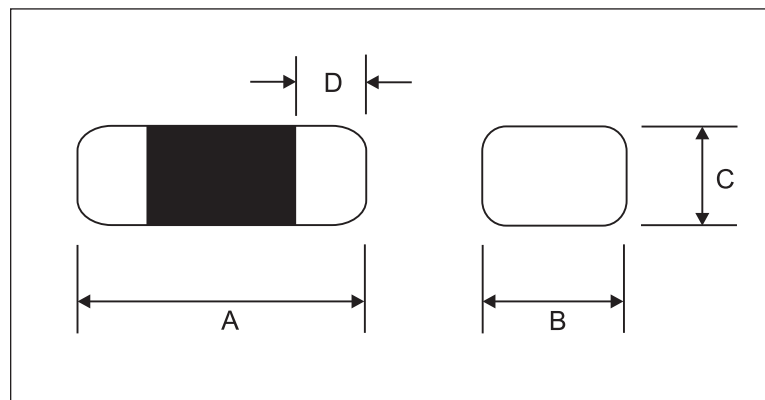

12.14.06