

CXOHV8 Model 14 Pin Dip, 3.3V & 5V, HCMOS/TTL

Frequency Range:	1MHz to 38MHz
Frequency Stability:	±1ppm to ±5ppm
Freq. Stability vs Volt:	±0.5ppm Max
Freq. Stability vs Load:	±0.3ppm Max
Temperature Range:	-40°C to 85°C
Storage:	-55°C to 120°C
Input Voltage:	3.3V or 5V ± 5%
Trimmer Adj.:	Voltage Trim
Input Current:	15mA Typ, 30mA Max
Output:	HCMOS/TTL
Symmetry:	40/60% Max @ 50% Vdd
(Option Y)	45/55% Max
Rise/Fall Time:	4ns Typ, 10ns Max
Output Voltage:	"0" = 10% Vdd Max
	"1" = 90% Vdd Min
Load:	15pF/10TTL Max
Phase Noise Typ.:	
10Hz	-100dBc/Hz
100Hz	-130dBc/Hz
1KHz	-140dBc/Hz
10KHz	-145dBc/Hz
100KHz	-150dBc/Hz
Aging:	<1ppm Max/Yr



Temperature Compensated Crystal Oscillator With Voltage Trim & Hermetic Seal






Designed to meet today's requirements for tighter frequency stability and 14 Pin Dip layout compatibility.

VCTCXO Specification


Voltage Trim Pin 1:	± 5ppm Min
Control Voltage:	(5V) 2.5V ± 2.5V
	(3.3V) 1.65V ± 1.65V

CXOHV8

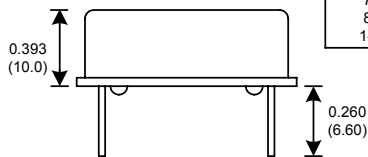

PIN	Function
1	Volt Trim
7	GND
8	OUT
14	Vcc

Dimensions inches (mm)
All dimensions are Max unless otherwise specified.

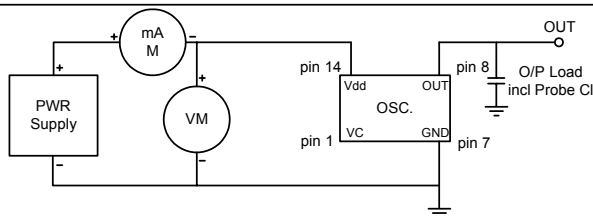

	Operating Temperature	Freq. Stability (± ppm)						
A	0°C to 50°C	1.0	1.5	2.0	2.5	3.0	4.0	5.0
B	-10°C to 60°C			2.0	2.5	3.0	4.0	5.0
C	-10°C to 70°C			2.0	2.5	3.0	4.0	5.0
D	-20°C to 70°C			2.0	2.5	3.0	4.0	5.0
E	-30°C to 60°C			2.0	2.5	3.0	4.0	5.0
F	-30°C to 70°C			2.0	2.5	3.0	4.0	5.0
G	-30°C to 75°C			2.0	2.5	3.0	4.0	5.0
H	-40°C to 85°C					3.0	4.0	5.0
		P	A	B	C	D	E	F

Table 1

Crystek Part Number Guide

CXOHV8 - B C 3 Y - 25.000

#1	#2	#3	#4	#5	#6
#1 Crystek TCXO 14 Pin Dip HCMOS/TTL	#2 Letter = Operating Temperature (see table 1)	#3 Letter = Frequency Stability (see table 1)	#4 3 or blank = Input Volt (3 = 3.3 volts) (Blank= 5V)	#5 Y or blank = Symmetry (Y=45/55) (Blank = 40/60)	#6 Frequency in MHz: 3 or 6 decimal places

Example:
CXOHV8-BC3Y-25.000 = -10/60, ±2.5ppm, 3.3V, 45/55%, 25.000MHz

Specifications subject to change without notice.

TD-020901 Rev. B



Crystek Crystals Corporation

12730 Commonwealth Drive • Fort Myers, FL 33913
239.561.3311 • 800.237.3061 • FAX: 239.561.1025 • www.crystek.com