CY7C1019BV33
CY7C1018BV33

128K x 8 Static RAM

Features

- **High speed**
  - **— t_{AA} = 10 ns**
- **CMOS for optimum speed/power**
- **Center power/ground pinout**
- **Automatic power-down when deselected**
- **Easy memory expansion with $\overline{CE}$ and $\overline{OE}$ options**
- **Functionally equivalent to CY7C1019V33 and/or CY7C1018V33**

Functional Description

The CY7C1019BV33/CY7C1018BV33 is a high-performance CMOS static RAM organized as 131,072 words by 8 bits. Easy memory expansion is provided by an active LOW Chip Enable ($\overline{CE}$), an active LOW Output Enable ($\overline{OE}$), and three-state drivers. This device has an automatic power-down feature that significantly reduces power consumption when deselected.


Writing to the device is accomplished by taking Chip Enable ($\overline{CE}$) and Write Enable ($\overline{WE}$) inputs LOW. Data on the eight I/O pins (I/O_0 through I/O_7) is then written into the location specified on the address pins (A_0 through A_{16}).

Reading from the device is accomplished by taking Chip Enable ($\overline{CE}$) and Output Enable ($\overline{OE}$) LOW while forcing Write Enable ($\overline{WE}$) HIGH. Under these conditions, the contents of the memory location specified by the address pins will appear on the I/O pins.

The eight input/output pins (I/O_0 through I/O_7) are placed in a high-impedance state when the device is deselected ($\overline{CE}$ HIGH), the outputs are disabled ($\overline{OE}$ HIGH), or during a write operation ($\overline{CE}$ LOW, and $\overline{WE}$ LOW).


The CY7C1019BV33 is available in standard 32-pin TSOP Type II and 400-mil-wide package. The CY7C1018BV33 is available in a standard 300-mil-wide package.

Logic Block Diagram

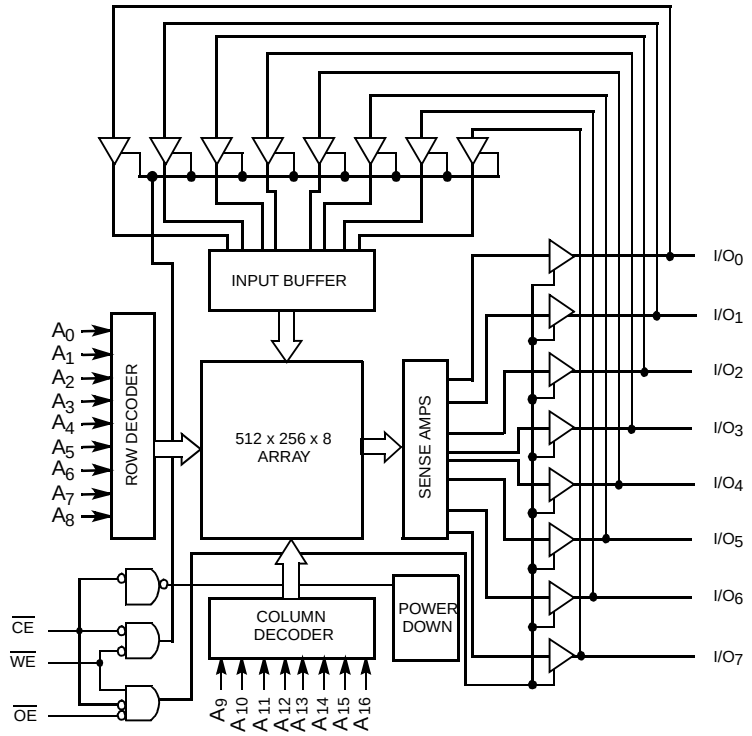

Pin Configurations

SOJ / TSOPII
Top View

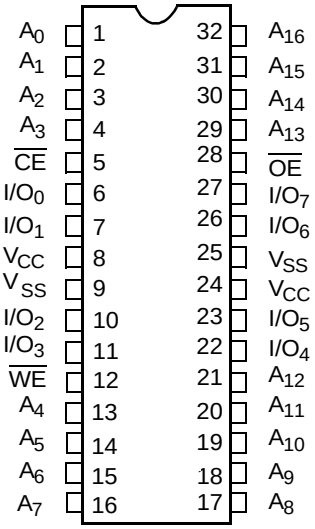

Selection Guide

		7C1019BV33-10 7C1018BV33-10	7C1019BV33-12 7C1018BV33-12	7C1019BV33-15 7C1018BV33-15
Maximum Access Time (ns)		10	12	15
Maximum Operating Current (mA)		175	160	145
Maximum Standby Current (mA)		5	5	5
	L	–	0.5	0.5

Maximum Ratings

(Above which the useful life may be impaired. For user guidelines, not tested.)

Storage Temperature .....–65°C to +150°C

Ambient Temperature with Power Applied.....–55°C to +125°C

Supply Voltage on V_{CC} to Relative GND[1] .... –0.5V to +7.0V

DC Voltage Applied to Outputs in High Z State[1].....–0.5V to V_{CC} + 0.5V

DC Input Voltage[1].....–0.5V to V_{CC} + 0.5V

Current into Outputs (LOW)..... 20 mA

Static Discharge Voltage .....>2001V (per MIL-STD-883, Method 3015)

Latch-Up Current.....>200 mA

Operating Range

Range	Ambient Temperature[2]	V_{CC}
Commercial	0°C to +70°C	3.3V ± 10%

Electrical Characteristics Over the Operating Range

Parameter	Description	Test Conditions		7C1019BV33-10 7C1018BV33-10		7C1019BV33-12 7C1018BV33-12		7C1019BV33-15 7C1018BV33-15		Unit
				Min.	Max.	Min.	Max.	Min.	Max.	
V_{OH}	Output HIGH Voltage	V_{CC} = Min., I_{OH} = – 4.0 mA		2.4		2.4		2.4		V
V_{OL}	Output LOW Voltage	V_{CC} = Min., I_{OL} = 8.0 mA			0.4		0.4		0.4	V
V_{IH}	Input HIGH Voltage			2.2	V_{CC} + 0.3	2.2	V_{CC} + 0.3	2.2	V_{CC} + 0.3	V
V_{IL}	Input LOW Voltage[1]			–0.3	0.8	–0.3	0.8	–0.3	0.8	V
I_{IX}	Input Load Current	GND ≤ V_I ≤ V_{CC}		–1	+1	–1	+1	–1	+1	µA
I_{OZ}	Output Leakage Current	GND ≤ V_I ≤ V_{CC}, Output Disabled		–5	+5	–5	+5	–5	+5	µA
I_{CC}	V_{CC} Operating Supply Current	V_{CC} = Max., I_{OUT} = 0 mA, f = f_{MAX} = $1/t_{RC}$			175		160		145	mA
I_{SB1}	Automatic CE Power-Down Current —TTL Inputs	Max. V_{CC}, $\overline{CE}$ ≥ V_{IH} V_{IN} ≥ V_{IH} or V_{IN} ≤ V_{IL}, f = f_{MAX}			20		20		20	mA
I_{SB2}	Automatic CE Power-Down Current —CMOS Inputs	Max. V_{CC}, $\overline{CE}$ ≥ V_{CC} – 0.3V, V_{IN} ≥ V_{CC} – 0.3V, or V_{IN} ≤ 0.3V, f = 0			5		5		5	mA
			L		–		0.5		0.5	


Capacitance[3]

Parameter	Description	Test Conditions	Max.	Unit
C_{IN}	Input Capacitance	T_A = 25°C, f = 1 MHz, V_{CC} = 5.0V	6	pF
C_{OUT}	Output Capacitance		8	pF


Notes:

1. V_{IL} (min.) = –2.0V for pulse durations of less than 20 ns.
2. T_A is the "Instant On" case temperature.
3. Tested initially and after any design or process changes that may affect these parameters.

AC Test Loads and Waveforms

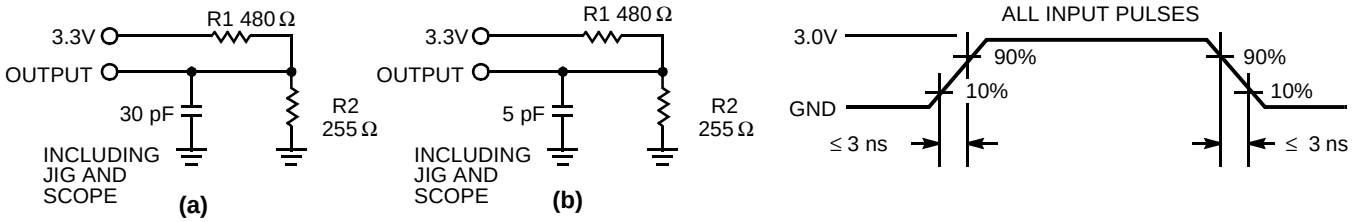

Equivalent to: THÉVENIN EQUIVALENT



Switching Characteristics[4] Over the Operating Range

Parameter	Description	7C1019BV33-10 7C1018BV33-10		7C1019BV33-12 7C1018BV33-12		7C1019BV33-15 7C1018BV33-15		Unit
		Min.	Max.	Min.	Max.	Min.	Max.	
READ CYCLE								
t_{RC}	Read Cycle Time	10		12		15		ns
t_{AA}	Address to Data Valid		10		12		15	ns
t_{OHA}	Data Hold from Address Change	3		3		3		ns
t_{ACE}	$\overline{CE}$ LOW to Data Valid		10		12		15	ns
t_{DOE}	$\overline{OE}$ LOW to Data Valid		5		6		7	ns
t_{LZOE}	$\overline{OE}$ LOW to Low Z	0		0		0		ns
t_{HZOE}	$\overline{OE}$ HIGH to High Z[5, 6]		5		6		7	ns
t_{LZCE}	$\overline{CE}$ LOW to Low Z[6]	3		3		3		ns
t_{HZCE}	$\overline{CE}$ HIGH to High Z[5, 6]		5		6		7	ns
t_{PU}	$\overline{CE}$ LOW to Power-Up	0		0		0		ns
t_{PD}	$\overline{CE}$ HIGH to Power-Down		10		12		15	ns
WRITE CYCLE[7, 8]								
t_{WC}	Write Cycle Time	10		12		15		ns
t_{SCE}	$\overline{CE}$ LOW to Write End	8		9		10		ns
t_{AW}	Address Set-Up to Write End	7		8		10		ns
t_{HA}	Address Hold from Write End	0		0		0		ns
t_{SA}	Address Set-Up to Write Start	0		0		0		ns
t_{PWE}	$\overline{WE}$ Pulse Width	7		8		10		ns
t_{SD}	Data Set-Up to Write End	5		6		8		ns
t_{HD}	Data Hold from Write End	0		0		0		ns
t_{LZWE}	$\overline{WE}$ HIGH to Low Z[6]	3		3		3		ns
t_{HZWE}	$\overline{WE}$ LOW to High Z[5, 6]		5		6		7	ns


Notes:

4. Test conditions assume signal transition time of 3 ns or less, timing reference levels of 1.5V, input pulse levels of 0 to 3.0V, and output loading of the specified I_{OL}/I_{OH} and 30-pF load capacitance.
5. t_{HZOE}, t_{HZCE}, and t_{HZWE} are specified with a load capacitance of 5 pF as in part (b) of AC Test Loads. Transition is measured ±500 mV from steady-state voltage.
6. At any given temperature and voltage condition, t_{HZCE} is less than t_{LZCE}, t_{HZOE} is less than t_{LZOE}, and t_{HZWE} is less than t_{LZWE} for any given device.
7. The internal write time of the memory is defined by the overlap of CE LOW and $\overline{WE}$ LOW. CE and $\overline{WE}$ must be LOW to initiate a write, and the transition of any of these signals can terminate the write. The input data set-up and hold timing should be referenced to the leading edge of the signal that terminates the write.
8. The minimum write cycle time for Write Cycle no. 3 ($\overline{WE}$ controlled, $\overline{OE}$ LOW) is the sum of t_{HZWE} and t_{SD}.

Data Retention Characteristics Over the Operating Range (L Version Only)


Parameter	Description	Conditions	Min.	Max.	Unit
V_{DR}	V_{CC} for Data Retention	No input may exceed V_{CC} + 0.5V $V_{CC} = V_{DR} = 2.0V$, $\overline{CE} \geq V_{CC} - 0.3V$, $V_{IN} \geq V_{CC} - 0.3V$ or $V_{IN} \leq 0.3V$	2.0		V
I_{CCDR}	Data Retention Current			150	µA
t_{CDR}[3]	Chip Deselect to Data Retention Time		0		ns
t_R	Operation Recovery Time		200		µs

Data Retention Waveform

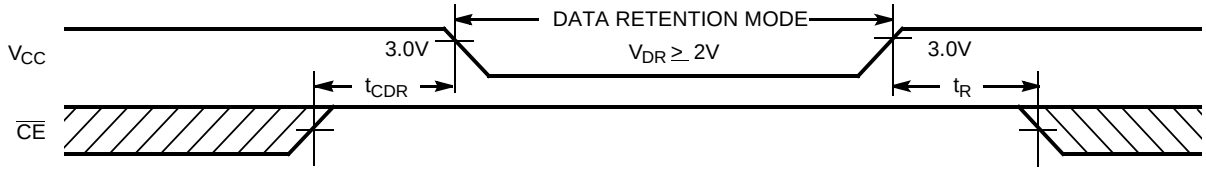


Switching Waveforms

Read Cycle No. 1[9, 10]

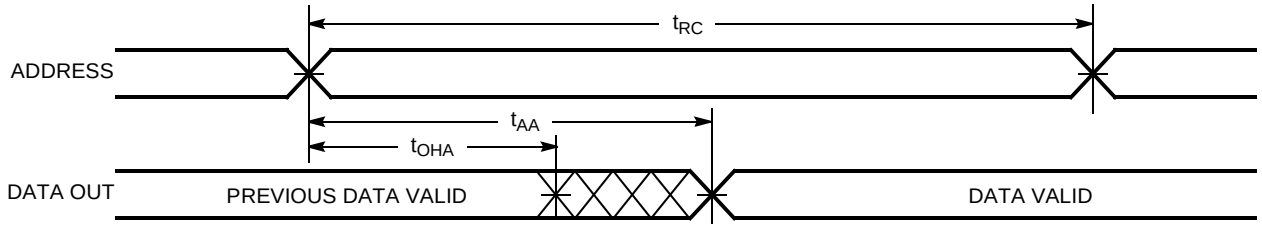


Read Cycle No. 2 ($\overline{OE}$ Controlled)[10, 11]

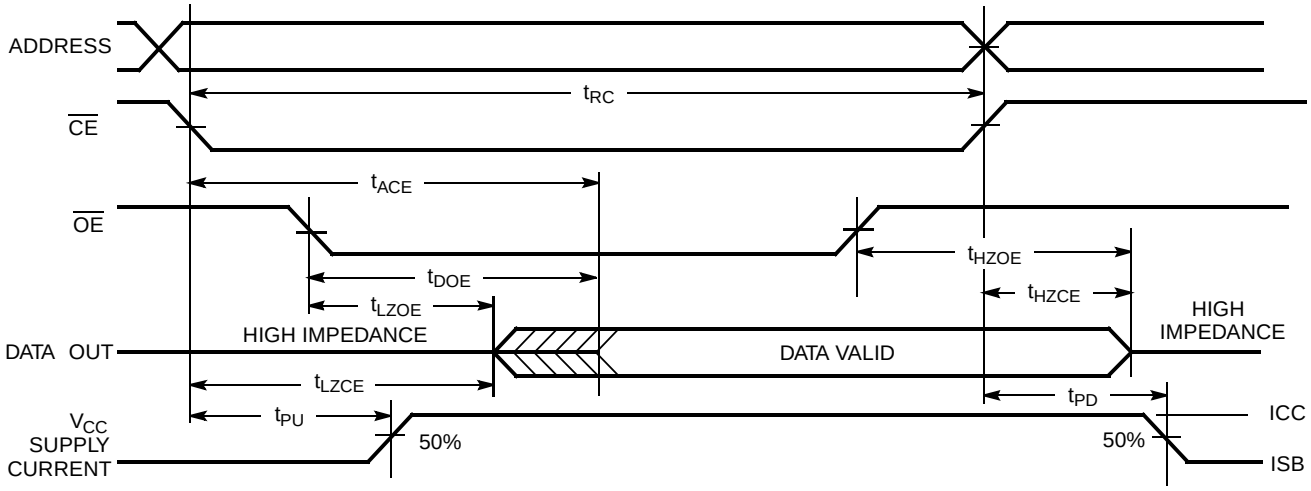


Notes:
9. Device is continuously selected. $\overline{OE}$, $\overline{CE} = V_{IL}$.
10. $\overline{WE}$ is HIGH for read cycle.
11. Address valid prior to or coincident with $\overline{CE}$ transition LOW.

Switching Waveforms (continued)

Write Cycle No. 1 ($\overline{CE}$ Controlled)[12, 13]

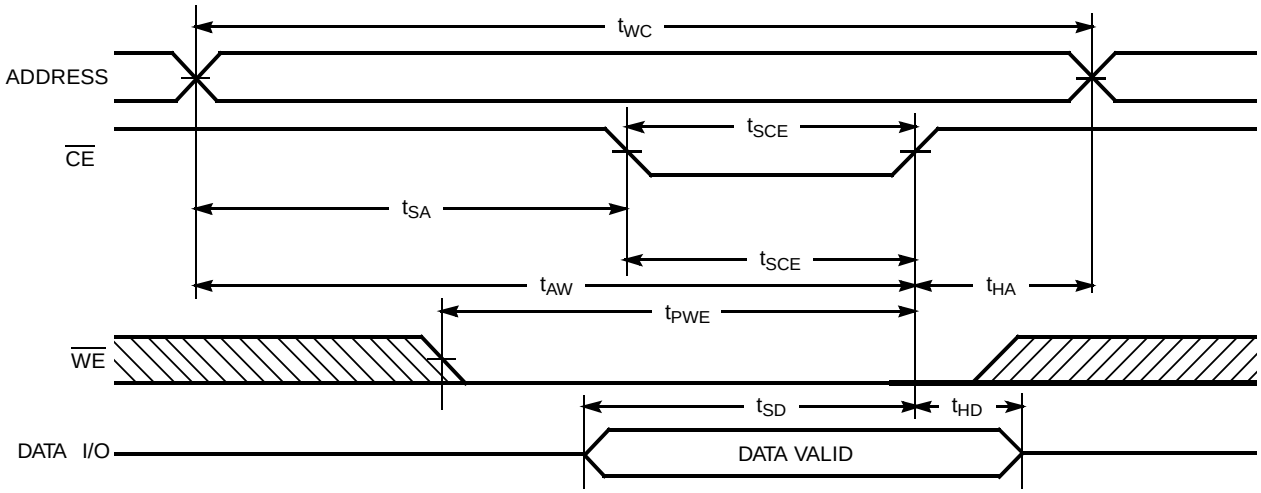


Write Cycle No. 2 ($\overline{WE}$ Controlled, $\overline{OE}$ HIGH During Write)[12, 13]

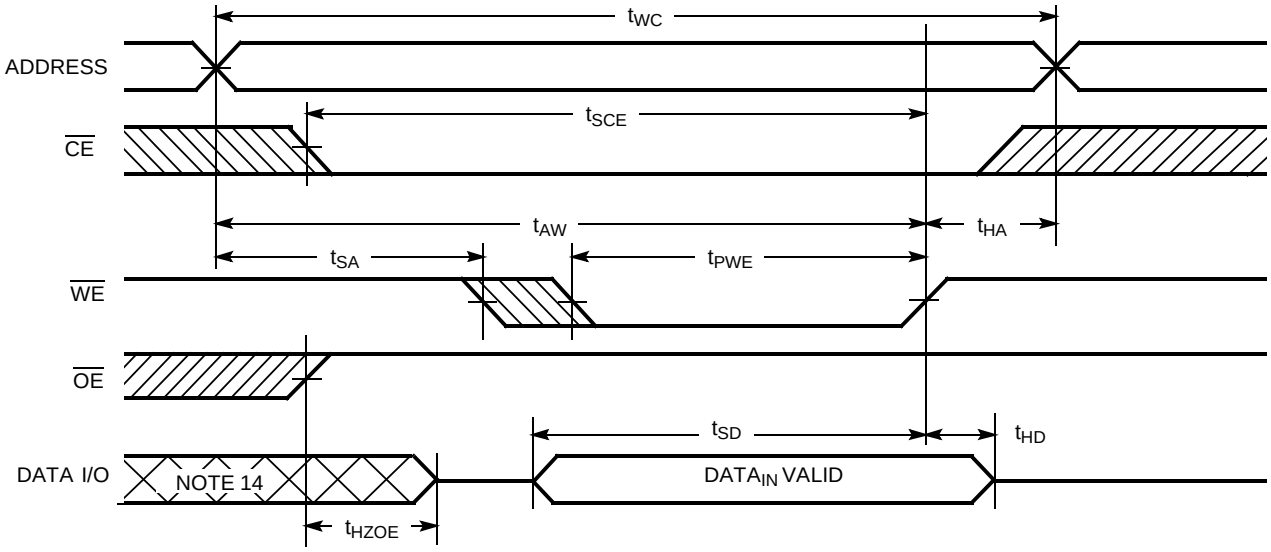

Notes:
12. Data I/O is high impedance if $\overline{OE} = V_{IH}$.
13. If $\overline{CE}$ goes HIGH simultaneously with $\overline{WE}$ going HIGH, the output remains in a high-impedance state.
14. During this period the I/Os are in the output state and input signals should not be applied.

Switching Waveforms (continued)

Write Cycle No. 3 ($\overline{WE}$ Controlled, $\overline{OE}$ LOW)[13]

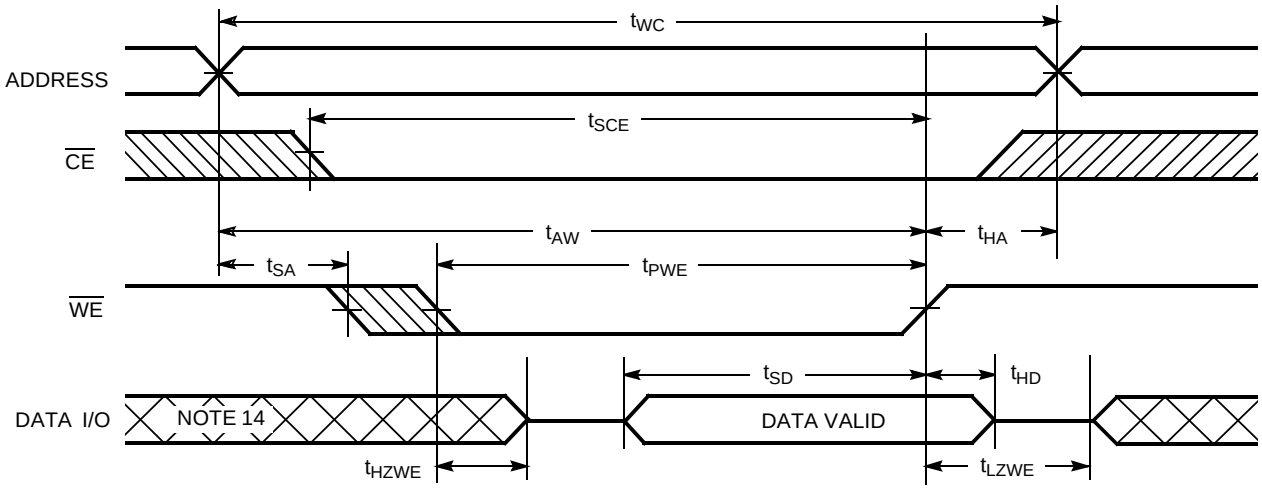

Truth Table


$\overline{CE}$	$\overline{OE}$	$\overline{WE}$	I/O_0–I/O_7	Mode	Power
H	X	X	High Z	Power-Down	Standby (I_{SB})
X	X	X	High Z	Power-Down	Standby (I_{SB})
L	L	H	Data Out	Read	Active (I_{CC})
L	X	L	Data In	Write	Active (I_{CC})
L	H	H	High Z	Selected, Outputs Disabled	Active (I_{CC})

Ordering Information


Speed (ns)	Ordering Code	Package Name	Package Type	Operating Range
10	CY7C1018V33-10VC	V32	32-Lead 300-Mil Molded SOJ	Commercial
	CY7C1019BV33-10VC	V33	32-Lead 400-Mil Molded SOJ	
	CY7C1019BV33-10ZC	ZS32	32-Lead TSOP Type II	
12	CY7C1018BV33-12VC	V32	32-Lead 300-Mil Molded SOJ	
	CY7C1018BV33L-12VC	V32	32-Lead 300-Mil Molded SOJ	
	CY7C1019BV33-12VC	V33	32-Lead 400-Mil Molded SOJ	
	CY7C1019BV33-12ZC	ZS32	32-Lead TSOP Type II	
	CY7C1019BV33L-12VC	V33	32-Lead 400-Mil Molded SOJ	
	CY7C1019BV33L-12ZC	ZS32	32-Lead TSOP Type II	
15	CY7C1018BV33-15VC	V32	32-Lead 300-Mil Molded SOJ	
	CY7C1018BV33L-15VC	V32	32-Lead 300-Mil Molded SOJ	
	CY7C1018BV33-15VI	V32	32-Lead 300-Mil Molded SOJ	
	CY7C1019BV33-15VC	V33	32-Lead 400-Mil Molded SOJ	
	CY7C1019BV33-15ZC	ZS32	32-Lead TSOP Type II	
	CY7C1019BV33L-15VC	V33	32-Lead 400-Mil Molded SOJ	
	CY7C1019BV33L-15ZC	ZS32	32-Lead TSOP Type II	
	CY7C1019BV33-15VI	V33	32-Lead 400-Mil Molded SOJ	
	CY7C1019BV33-15ZI	ZS32	32-Lead TSOP Type II	Industrial
Document #: 38-01053-*B				

Package Diagram

32-Lead (400-Mil) Molded SOJ V33

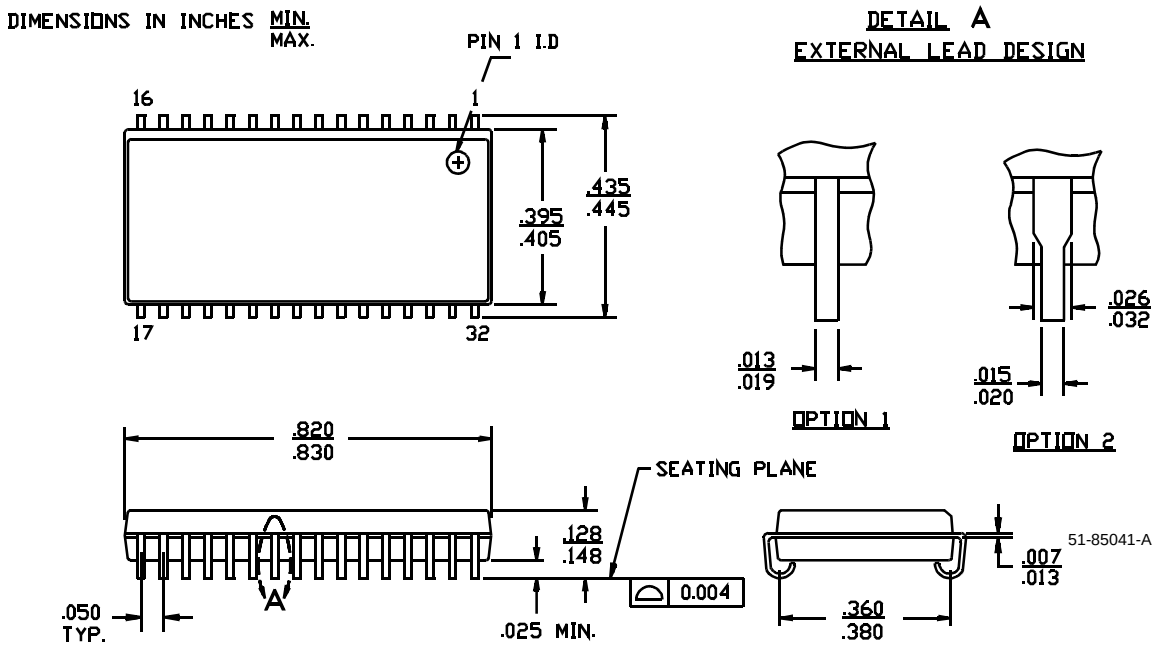


32-Lead (300-Mil) Molded SOJ V32

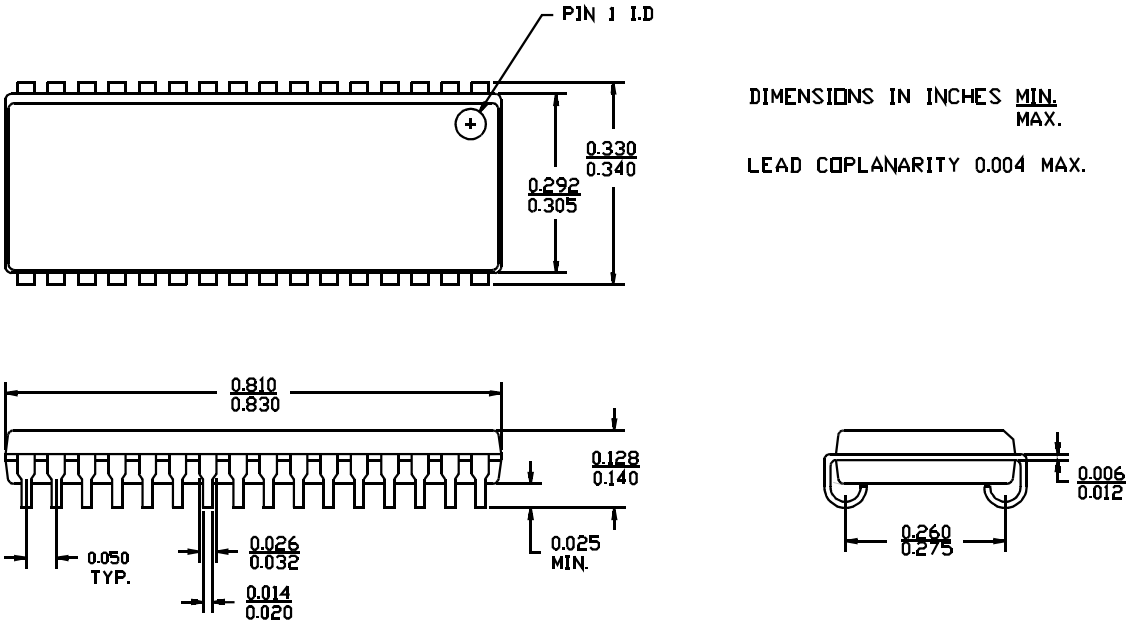

51-85041

Package Diagram

32-Lead TSOP II ZS32

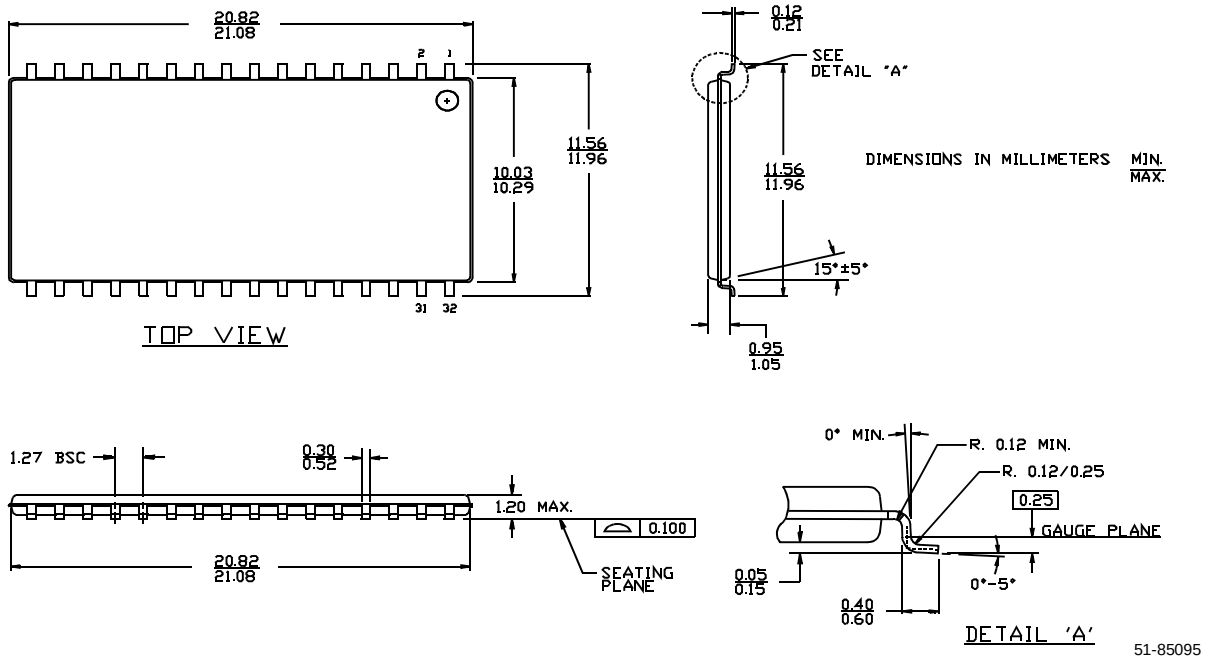

© Cypress Semiconductor Corporation, 2001. The information contained herein is subject to change without notice. Cypress Semiconductor Corporation assumes no responsibility for the use of any circuitry other than circuitry embodied in a Cypress Semiconductor product. Nor does it convey or imply any license under patent or other rights. Cypress Semiconductor does not authorize its products for use as critical components in life-support systems where a malfunction or failure may reasonably be expected to result in significant injury to the user. The inclusion of Cypress Semiconductor products in life-support systems application implies that the manufacturer assumes all risk of such use and in doing so indemnifies Cypress Semiconductor against all charges.