

Car audio power amplifiers moving to the green zone



Linear and digital high-efficiency audio power amplifiers with start-stop and hybrid-vehicle compatibility

ST is world leader in automotive audio power amplifiers, and offers solutions for each market segment. ST is also committed to environment protection and was the first company to design audio amplifiers with the specific target of allowing car makers to decrease exhaust, fuel consumption and vehicle weight.

Every new power amplifier from ST is now compatible with the most recent technologies for green vehicles, such as start-stop and hybrid technologies, and embeds advanced high-efficiency solutions.

KEY FEATURES

- Compatibility with start-stop and hybrid-vehicle battery profiles: the engine stops and restarts without any interruption or noise on the audio
- Full protection against any misconnection
- Full digital diagnostics
- High noise-injection immunity
- Automotive-grade EMC performances
- MOSFET output power
- Superior audio performances

Analog family

- Class SB high efficiency with up to 25% less power dissipation compared to class AB (actual measurements)


Digital families

- Class D high efficiency with optimized BOM
- Class SBi high efficiency with up to 50% less power dissipation compared to class AB

KEY BENEFITS

- Low power dissipation with high output power
- Smaller heatsink allowing smaller and lighter applications
- Contribution to emission reductions and environment protection
- Lower application cost compared to equivalent solutions (especially for class D)
- Compatibility with existing products, so direct replacement is possible with minor redesign

NEW AUDIO POWER GREEN WAVE

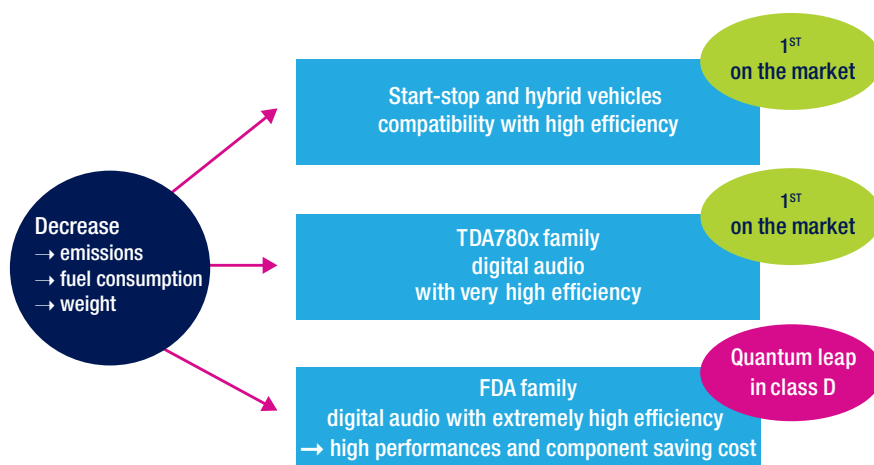

TARGETED APPLICATIONS

- Head units
- Boosters
- Automotive sound systems

FULL PRODUCT SUPPORT

Demonstration boards, technical documentation and relevant software are available for all automotive power amplifiers.

DEVICE SUMMARY

Part number	Description
TDA7391LV	35 W single bridge power amplifier
TDA7569BLV	4 x 50 W high efficiency, class SB power amplifier with full I ² C diagnostics
TDA7569BDLV	4 x 50 W high efficiency, class SB differential input power amplifier with full I ² C diagnostics
TDA75610SLV	4 x 45 W high efficiency, class SB power amplifier with full I ² C diagnostics
TDA75610DLV	4 x 45 W high efficiency, class SB differential input power amplifier with full I ² C diagnostics
TDA75612LV	4 x 45 W power amplifier with full I ² C diagnostics and en/dis SSR ⁽¹⁾
TDA75613LV	4 x 45 W high efficiency, class SB power amplifier with full I ² C diagnostics and SSR ⁽¹⁾
TDA75616LV	4 x 45 W power amplifier with full I ² C diagnostics and SSR ⁽¹⁾
TDA7577BLV	2 x 50 W high efficiency, class SB dual bridge power amplifier with with full I ² C diagnostics
TDA7802	High efficiency, class SB-I ⁽²⁾ digital input quad power amplifier with built-in diagnostics features
FDA4100LV	4 x 135 W / 2 x 270 W PWM digital input power amplifier with built-in diagnostics and step-up driver
FDA450LV	4 x 50 W PWM digital input power amplifier with built-in diagnostics features
FDA2100LV	2 x 180W/1 x 300W PWM digital-input power amplifier with built-in diagnostics and step-up driver
STPA001	4 x 50 W MOSFET quad bridge power amplifier
STPA002	4 x 52 W MOSFET quad bridge power amplifier
STPA003	4 x 52 W MOSFET quad bridge power amplifier with high side driver and excellent GSM noise immunity
STPA008	4 x 50 W MOSFET quad bridge power amplifier with excellent GSM noise immunity

Notes:

⁽¹⁾ SSR is short for speaker safety routine, ⁽²⁾ Class SB-I is short for class SB improved



© STMicroelectronics - May 2015 - Printed in United Kingdom - All rights reserved
 The STMicroelectronics corporate logo is a registered trademark of the STMicroelectronics group of companies
 Thunderbolt is a trademark of Intel Corporation in the U.S. and/or other countries.
 All other names are the property of their respective owners

